



产 品 手 册

仪器型号： AR功率放大器150w1000b

西安安泰测试科技有限公司

仪器维修|租赁|销售|测试

地址:西安市高新区纬二十六路 369 号

网址: www.agitekservice.com

电话: 400-876-5512

座机: 029-88827159

Amplifiers

Model 150W1000B

Features:

- 150 W CW, 80 – 1000 MHz
- Class A design
- Portable
- 100% mismatch tolerant
- CE & RoHS Compliant
- High Efficiency

Applications:

- Wireless, communication components, subsystems
- CDMA, W-CDMA, TDMA, GSM
- EMC Test applications

To view our full amplifier portfolio visit:

www.arworld.us/amplifiers



The Model 150W1000B is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a minimum of 130 W across its operating bandwidth. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.

A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

Due to the Class A design it is ideally suited for EMC Test applications where continued operation into high VSWR loads including open and short circuits is required.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
info@arworld.us
www.arworld.us
ISO 9001:2015 Certified
ISO 17025:2017 Accredited

Model 150W1000B

- 150 W
- 80 – 1000 MHz

Electrical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (80 - 1000 MHz)	PSAT	130	160	>190	W
Input for Rated Output	Pin			1	mW
				0	dBm
Power Output @ 1 dB Compression	P1dB	100	125	>180	W
Power Output @ 3 dB Compression	P3dB	125	150	>200	W
Operating Frequency	BW	80		1000	MHz
Gain (Small Signal)		53	55	57	dB
Gain Reduction Adjustment (when below compression)		20	22	25	dB
Flatness	ΔG		± 1.5	± 2.0	dB
Input Impedance	Z in		50		Ohm
			1.3:1	1.5:1	VSWR
Output Impedance	Z out		50		Ohm
			2.0:1	2.5:1	VSWR
3 rd Order Intercept	IP3		58		dBm
Noise Figure	NF		6	8	dB
Harmonic Distortion @ 100 W	H2, H3		-30	-20	dBc
Spurious			-73		dBc
Power Consumption	PD			650	W

Absolute Maximum Rating

Exceeding any of the limits listed here may result in permanent damage to the device.

Parameter	Minimum	Typical	Maximum	Unit
RF Drive			+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.			100	%
AC Power	100		240	VAC
AC Power	47		63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	Normal Truck Transport			



Model 150W1000B

- 150 W
- 80 – 1000 MHz

Mechanical Specifications

Parameters	Typical	Unit
Dimensions (With Cabinet) (W x H x D)	50.3 x 20.5 x 74.9	cm
	19.8 x 8.1 x 29.5	in
Dimensions (No Cabinet) – 4U for 19" Rack	48.3 x 17.7 x 74.9	cm
	19.0 x 7.0 x 29.5	in
Weight (With Cabinet)	36.7	kg
	81	lb
Weight (No Cabinet)	25.4	kg
	56	lb
Cooling	Forced air (self-contained fans)	
Acoustical Noise (Measured @ 1 m from the front)	57	dBA

Connector interfaces

Function	Type
RF input	N female (50 Ω)
RF output	N female (50 Ω)
IEEE-488	24-pin female
RS-232	9-pin subminiature D female
RS-232 (fiber optic)	ST
USB 2.0	Type B
Ethernet	RJ-45
Interlock	15-pin subminiature D female

Regulatory Compliance

Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	EAR99



Model 150W1000B

- 150 W
- 80 – 1000 MHz


Ordering Options

150W1000B	-	-	N	-	-	N	-	Enclosure
Model		RF IN Conn		RF OUT Conn				No Enclosure
		Location, Type		Location, Type				

N-Connector		Enclosure	
Front	F	Enclosure	E
Rear	R	No Enclosure	NE

Contact your AR RF/Microwave Instrumentation Sales Associate for specific model configuration pricing.


Envelope Drawing

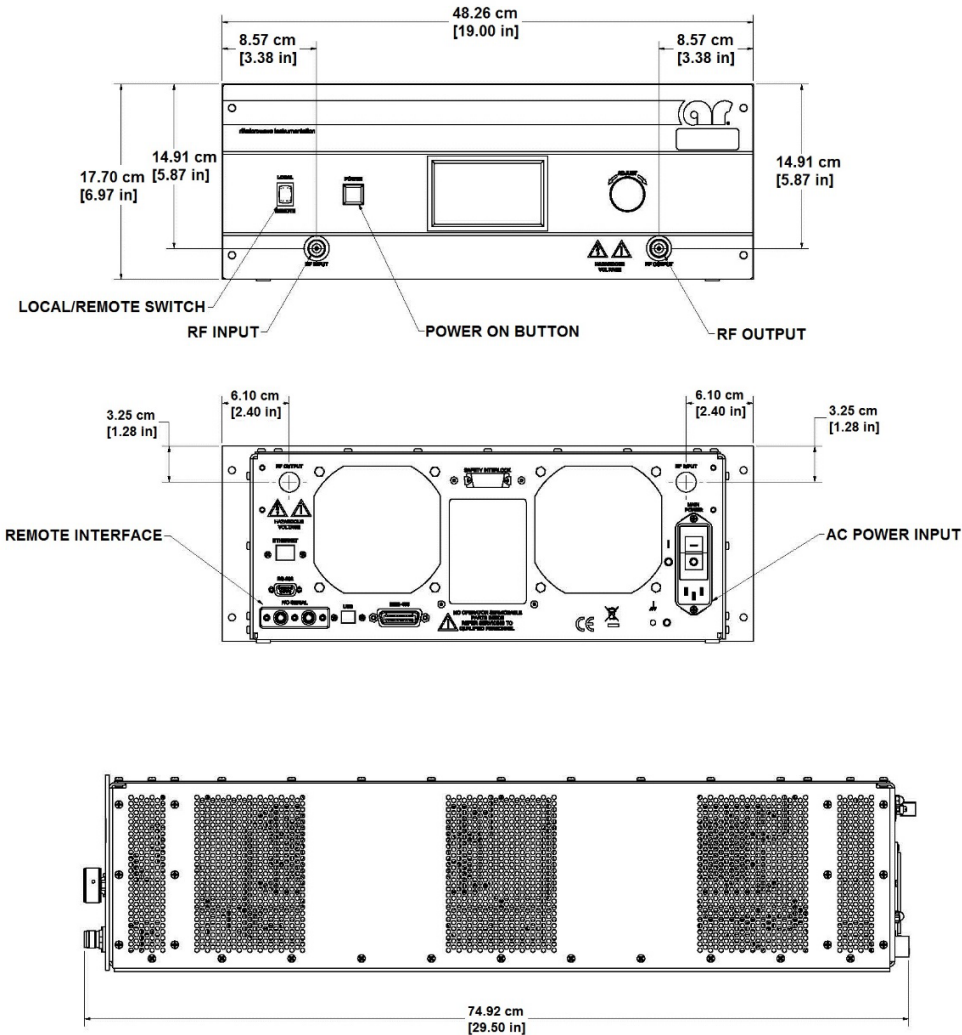


Model 150W1000B

- 150 W
- 80 – 1000 MHz

TYPICAL OUTPUT POWER (P1 dB, P3 dB compression)

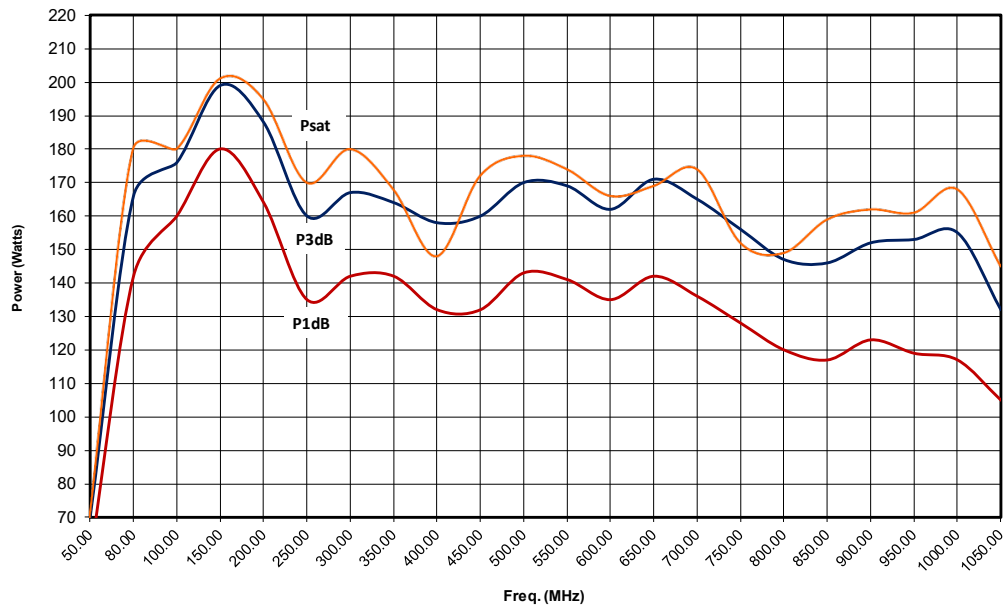


TYPICAL SMALL SIGNAL GAIN @ -20 dBm Input

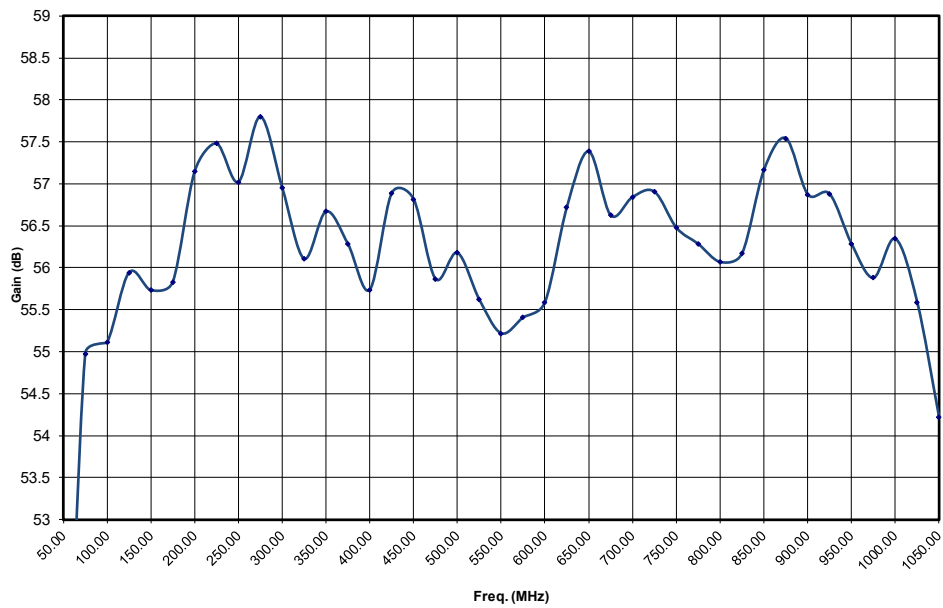


Model 150W1000B

- 150 W
- 80 – 1000 MHz

TYPICAL HARMONICS @ 100 WATTS

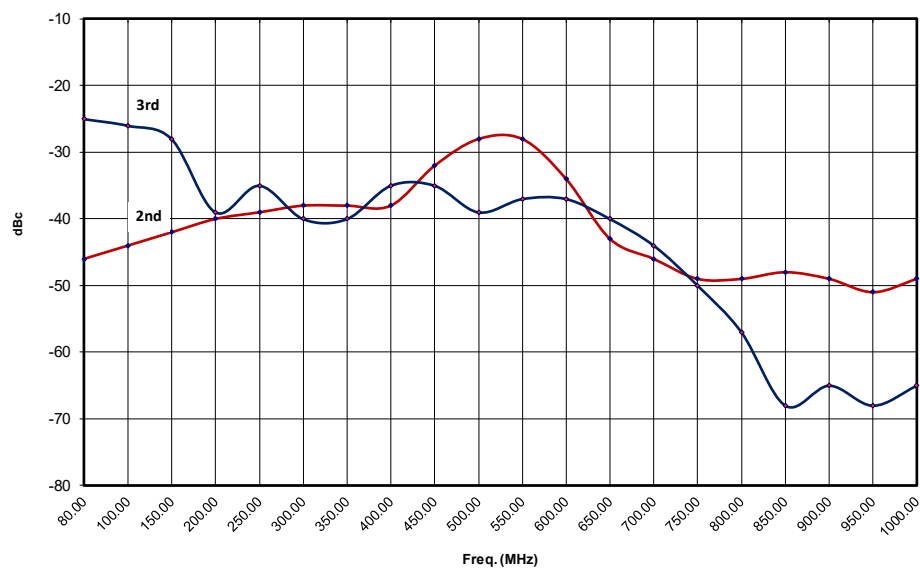


TYPICAL INPUT VSWR

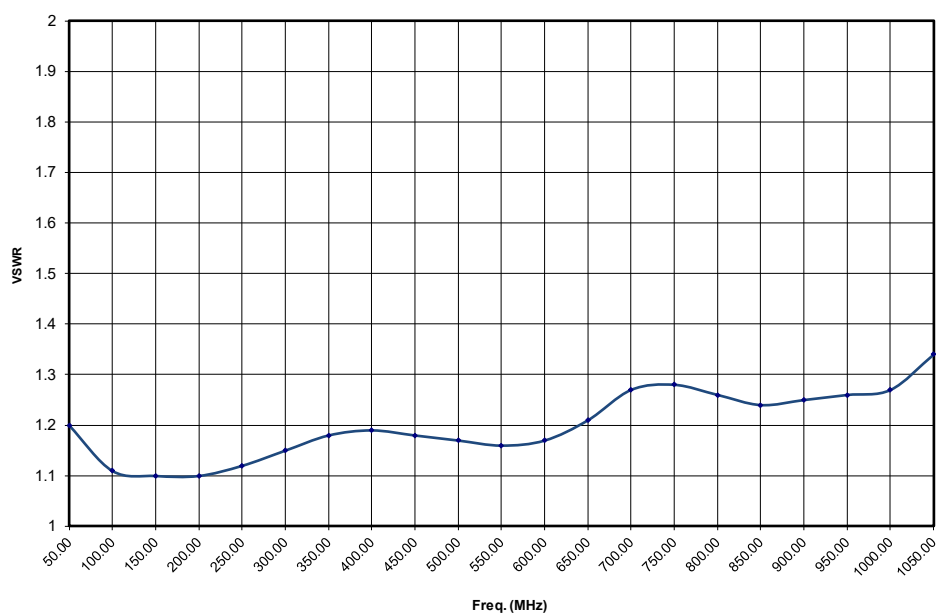

Model 150W1000B

- 150 W
- 80 – 1000 MHz

TYPICAL NOISE FIGURE

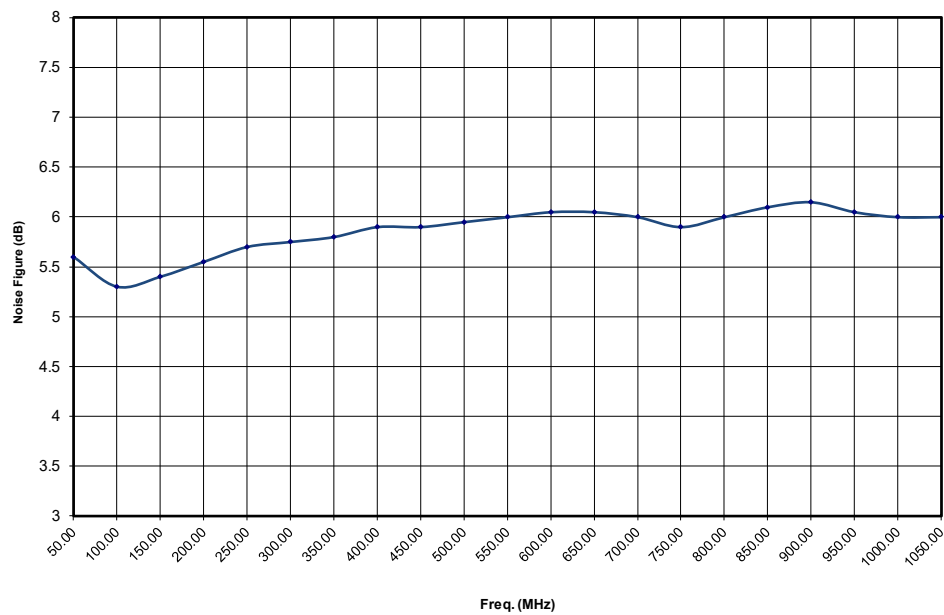

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964
To order AR Products, call: 215.723.8181. For an applications engineer call: 800.933.8181. Direct to Service call: 215.723.0275 or email: service@arworld.us
For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us
Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 accredited

Revision 062921

