



产 品 手 册

仪器型号: AR功率放大器40t18g26a

西安安泰测试科技有限公司


仪器维修|租赁|销售|测试

地址:西安市高新区纬二十六路 369 号

网址: www.agitekservice.com

电话: 400-876-5512

座机: 029-88827159

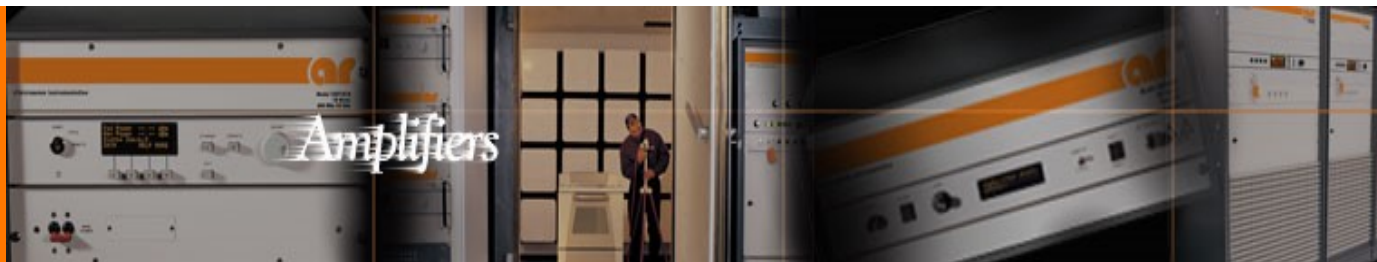

Amplifiers

40T18G26A

- M1-M11
- 40 Watts CW
- 18GHz-26.5GHz

Features

The Model 40T18G26A is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for applications where wide instantaneous bandwidth, high gain and moderate power output are required. A reliable TWT provides a conservative 40 watts minimum at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected output plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, OdBm input, VSWR protection, gain control, RF output sample port, auto sleep, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and


RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction.

Housed in a stylish contemporary cabinet, the unit is designed for benchtop use but can be removed from the cabinet for rack mounting. The Model 40T18G26A provides readily available RF power for a variety of applications in Test and Measurement, (including EMC RF susceptibility testing), Industrial and University Research and Development, and Service applications. These sub-octave amplifiers feature moderate harmonic content.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

Refer to Model Configuration Chart for alternative configurations and special features.

40T18G26A TYPICAL POWER OUTPUT

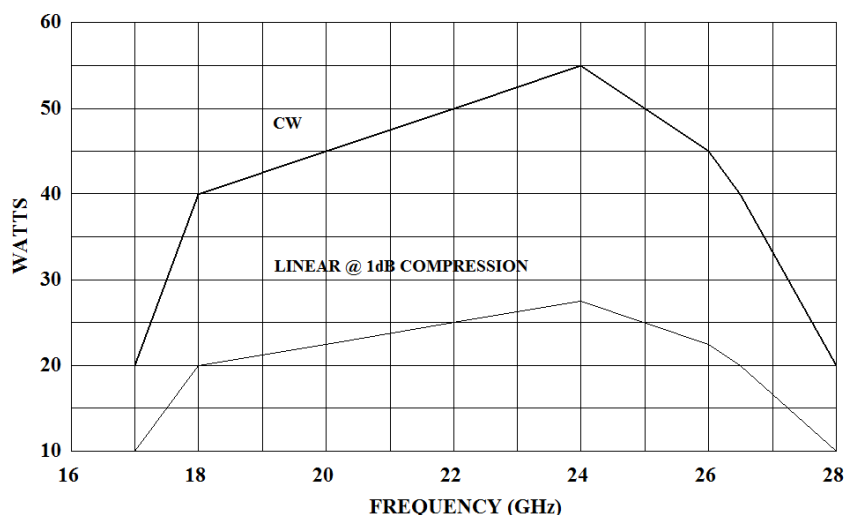

AR RF/Microwave
Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215-723-8181

For an applications engineer call: 800.933.8181

www.arworld.us



40T18G26A

- M1-M11
- 40 Watts CW
- 18GHz-26.5GHz

Specifications

Page 2

POWER (fundamental), CW, @ OUTPUT CONNECT-OR: Nominal, 45 watts; Minimum, 40 watts; Linear @ 1 dB Compression, 10 watts minimum

FLATNESS: ± 8 dB maximum

FREQUENCY RESPONSE: 18–26.5 GHz instantaneously

INPUT FOR RATED OUTPUT: 1.0 milliwatt maximum

GAIN (at maximum setting): 46 dB minimum

GAIN ADJUSTMENT (continuous range): 35 dB minimum

INPUT IMPEDANCE: 50 ohms, VSWR 2.0:1 maximum

OUTPUT IMPEDANCE: 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE: Output power foldback protection at reflected power exceeding 10 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

MODULATION CAPABILITY: Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal. AM peak envelope power limited to specified power.

VIDEO PULSE CAPABILITY (S2V OPTION)

Pulse Width: 0.1 microseconds min

Pulse Rate (PRF): 10 kHz max

Duty Cycle: Some restrictions apply. Contact AR with application requirements.

RF Rise and Fall: 30 ns max (10% to 90%)

Delay: 300 ns max from pulse input to RF90%

Pulse width distortion: 30 ns max (50% points of output pulse width compared to 50% points of input pulse width)

Noise Power Density, (pulse off): Minus 140 dBm/Hz (typical)

Pulse Off Isolation: 80 dB minimum, 90 dB typical

Pulse Input: TTL Level, 50 Ohm nominal termination, high level enables RF when video pulsing mode is selected.

NOISE POWER DENSITY: Minus 60 dBm/Hz (maximum); Minus 65 dBm/Hz (typical). See Model Configurations

HARMONIC DISTORTION: Minus 15 dBc maximum

PRIMARY POWER: See Model Configurations

CONNECTORS:

RF input: Type K female, rear panel

RF output: Type WR-42 waveguide flange, rear panel

RF output sample port: Type K female, rear panel

Pulse input (S2V option): Type BNC female, rear panel

GPIB: IEEE-488, rear panel

Interlock: DB-15 female, rear panel

COOLING: Forced air (self contained fans), air entry and exit in rear

WEIGHT: 30 kg, 65 lbs

SIZE (W x H x D): 50.3 x 16.5 x 68.6 cm, 19.8 x 6.5 x 27 in

EXPORT CLASSIFICATION: EAR99

40T18G26A

- M1-M11
- 40 Watts CW
- 18GHz-26.5GHz

Model Configurations

Page 3

- E Package Alternatives.** May select an alternative from the following [E1C or (E1C and E2S) and/or E3H]:
- E1C Cabinet:** Without outer enclosure for rack mounting, size (W x H x D) 48.3 x 13.3 (3U) x 68.6 cm, 19.0 x 5.25 (3U) x 27 in, Subtract approximately 7 kg, 15 lbs, for removal of outer enclosure.
- E2S Slides:** slides installed, add approximately 2 kg, 5 lbs.
- E3H Handles:** Front pull handles installed.
- P Primary Power** must select one primary power from the following options [P1 or P2]:
- P1 99-260 VAC,** 50/60 Hz, single phase, 850VA max.
- P2 400V Europe 360-435 VAC,** 3 phase, WYE (5 wire) 50/60 Hz, 850 VA max. CE marked to comply with EMC European Directive 89/336/EEC for operation inside a shielded room.
- S Special Features:** May select a special feature (extra cost) from the following [(S1R or S3F) and/or S2F and/or S5F and/or S4F]:
- S1R Reflected Power Port:** Type K female connector on rear panel. Forward and reflected sample port calibration data supplied on disk in Excel format at 51 points, evenly spaced over specified frequency response.
- S2F Flatness:** Flatness ± 4 dB max at rated power.
- S2V Video Pulse capability**
- S3F Reflected power port:** type K female connector on front panel. Forward and reflected sample port calibration data supplied on disk in Excel format at 51 points, evenly spaced over specified frequency response.
- S4F RF input connector:** On front panel, not on rear panel.
- S5F Forward output sample port:** On front panel, not on rear panel.

Model Number	Features		
	E	P	S
40T18G26A	Base model	P1	–
M1	E1C	P1	–
M2	E1C & E2S & E3H	P1	–
M3	See individual Specification Sheet		
M4	E1C	P1	S2F
M5	-	P1	S1R
M6	E1C	P1	S1R
M7	E1C & E2S & E3H	P1	S1R
M8	-	P1	S2V
M9	E1C & E2S & E3H	P2	S3F, S5F, S6F
M10	E1C & E2S	P1	S1R, S2F
M11	–	P1	S1R, S2F, S2V
Example: Model 40T18G26AM1 would have option E1C, no outer enclosure.			