



产 品 手 册

仪器型号： AR功率放大器250a400

西安安泰测试科技有限公司

仪器维修|租赁|销售|测试

地址:西安市高新区纬二十六路 369 号

网址: www.agitekservice.com

电话: 400-876-5512

座机: 029-88827159

Amplifiers

Model 250A400

Features:

- 250 W CW, 0.01 – 400 MHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring and protection
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
-

To view our full amplifier portfolio visit:

www.arworld.us/amplifiers

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
info@arworld.us
www.arworld.us
ISO 9001:2015 Certified
ISO 17025:2017 Accredited



The Model 250A400 is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a minimum of 250 W across its operating bandwidth. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.

A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

Due to the Class A design it is ideally suited for EMC Test applications where continued operation into high VSWR loads including open and short circuits is required.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

Model 250A400

- 250 W
- 0.01 - 400 MHz

Electrical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (0.01 - 400 MHz)	PSAT	250	325	>400	W
Input for Rated Output	Pin			1.0	mW
				0	dBm
Power Output @ 1 dB Compression	P1dB	200	250	>300	W
Power Output @ 3 dB Compression	P3dB	250	325	>400	W
Operating Frequency	BW	0.01		400	MHz
Gain (Small Signal)		54	58		dB
Gain Reduction Adjustment (when below compression)		20	25		dB
Flatness	ΔG		± 1.5	± 2.0	dB
Input Impedance	Z in		50		Ohm
			1.5:1	2.0:1	VSWR
Output Impedance	Z out		50		Ohm
			2.0:1	2.5:1	VSWR
3 rd Order Intercept	IP3		65		dBm
Noise Figure	NF		8.5		dB
Harmonic Distortion @ 250 W	H2, H3		-30	-20	dBc
Spurious			-73		dBc
Power Consumption	PD			1350	W

Absolute Maximum Rating

Exceeding any of the limits listed here may result in permanent damage to the device.

Parameter	Minimum	Typical	Maximum	Unit
RF Drive			+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected <small>Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.</small>			100	%
AC Power (single phase)	100		240	VAC
AC Power	47		63	Hz
Ambient Temperature for operation	+5		+40	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	Normal Truck Transport			



Model 250A400

- 250 W
- 0.01 - 400 MHz

Mechanical Specifications

Parameters		Unit
Dimensions (With Cabinet) (W x H x D)	50.3 x 20.5 x 74.9	cm
	19.8 x 8.1 x 29.5	in
Dimensions (No Cabinet) – 4U for 19" Rack	48.3 x 17.7 x 74.9	cm
	19 x 7.0 x 29.5	in
Weight (With Cabinet)	45	kg
	98	lb
Weight (No Cabinet)	33	kg
	73	lb
Cooling	Forced air (self-contained fans) Side inlets / rear outlet $\Delta t = +9^{\circ}\text{C}$ (typical)	
Acoustical Noise (Measured @ 1 meter from the front)	59 (typical)	dBA

Regulatory Compliance

Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	EAR99

Connector interfaces

Function	Type
RF input	N female (50 Ω)
RF output	N female (50 Ω)
IEEE-488	24-pin female
RS-232	9-pin subminiature D female
RS-232 (fiber optic)	ST
USB 2.0	Type B
Ethernet	RJ-45
Interlock	15-pin subminiature D female

Ordering Options


250A400	-	-	N	-	-	N	-														
Model			RF IN Conn Location, Type			RF OUT Conn Location, Type		Enclosure No Enclosure													
		<table><tr><th colspan="2">Connector</th></tr><tr><td>Front</td><td>F</td></tr><tr><td>Rear</td><td>R</td></tr></table>		Connector		Front	F	Rear	R			<table><tr><th colspan="2">Enclosure</th></tr><tr><td>Enclosure</td><td>E</td></tr><tr><td>No Enclosure</td><td>NE</td></tr></table>		Enclosure		Enclosure	E	No Enclosure	NE		
Connector																					
Front	F																				
Rear	R																				
Enclosure																					
Enclosure	E																				
No Enclosure	NE																				

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964 • 215-723-8181 • info@arworld.us • www.arworld.us • ISO 9001:2015 Certified • ISO 17025:2017 Accredited

Model 250A400

- 250 W
- 0.01 - 400 MHz


Envelope Drawing

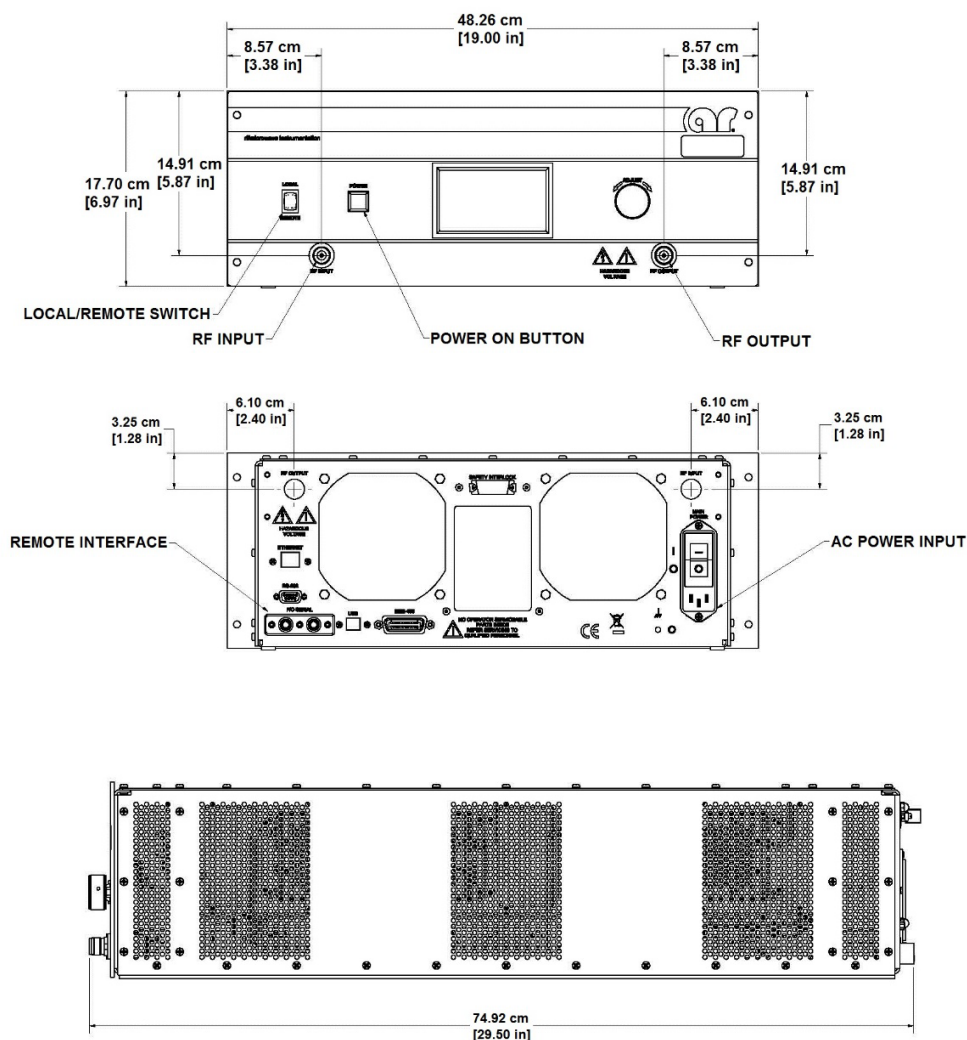


Model 250A400

- 250 W
- 0.01 - 400 MHz

TYPICAL PSAT POWER @ 0dBm INPUT

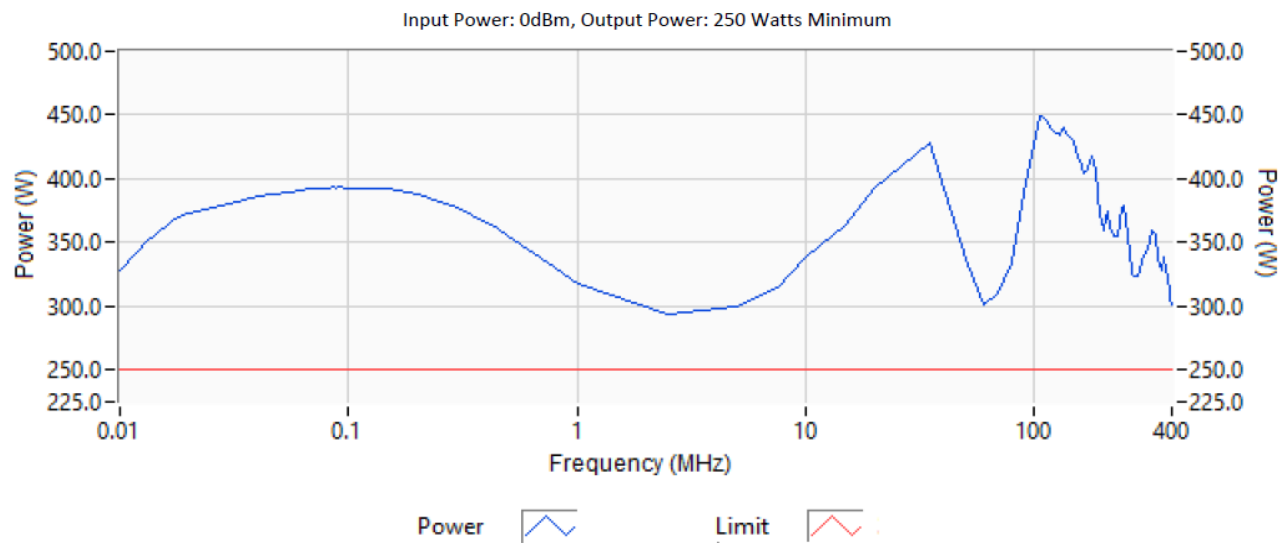


TYPICAL POWER @ P1dB, P3dB COMPRESSION

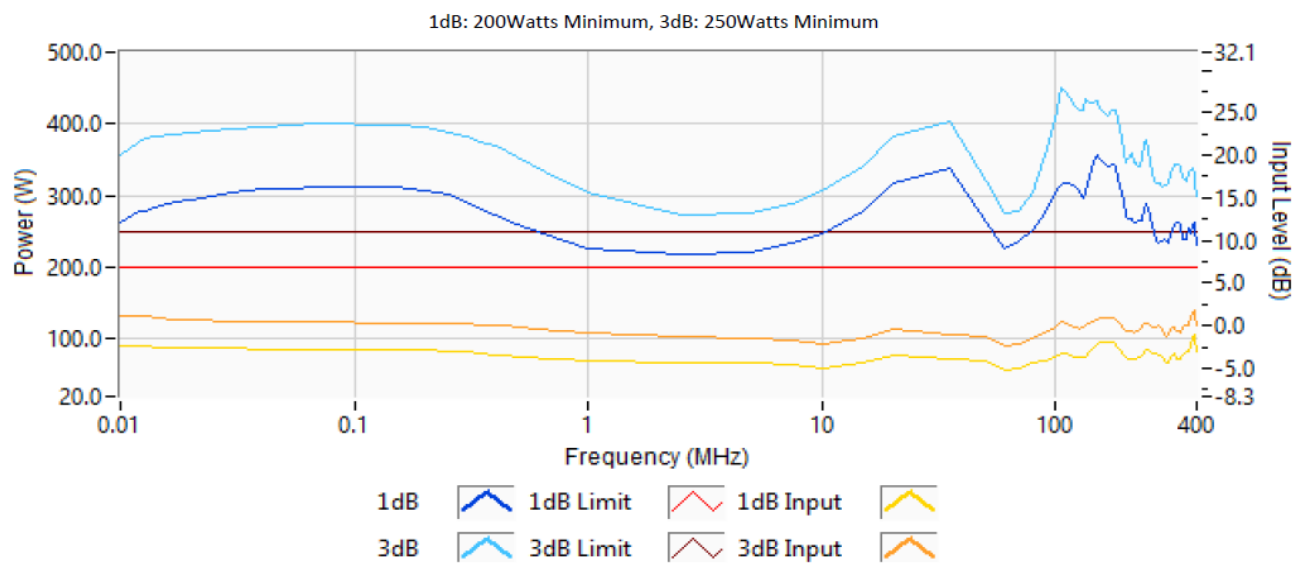


Model 250A400

- 250 W
- 0.01 - 400 MHz

TYPICAL SMALL SIGNAL GAIN @ -20dBm INPUT

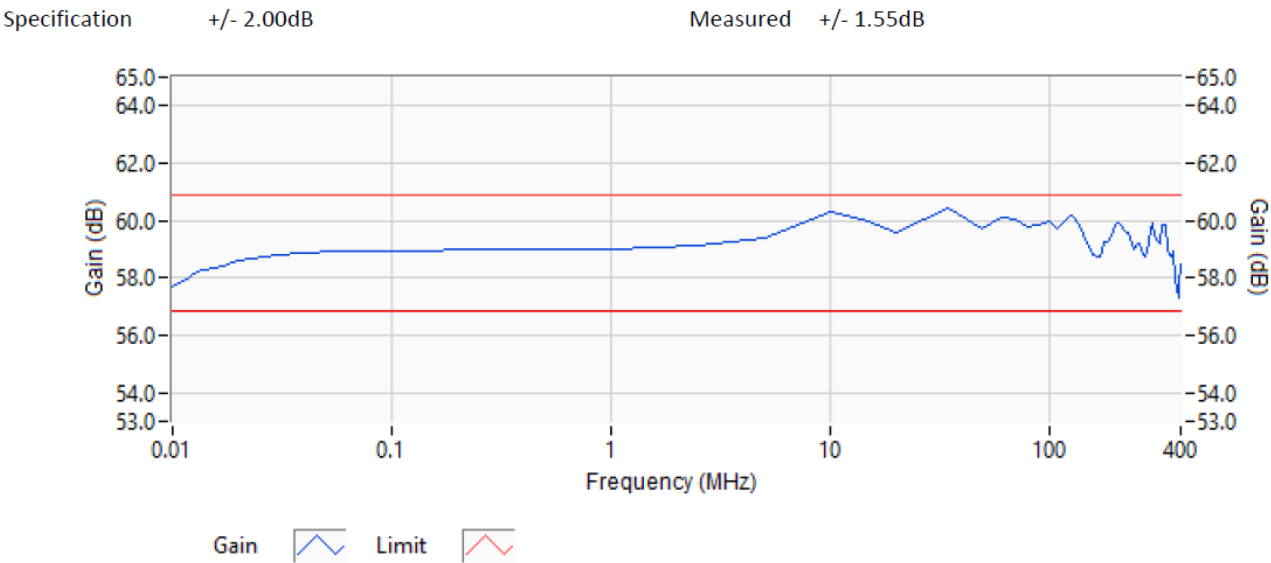

TYPICAL 2nd & 3rd HARMONICS @ 250 WATTS OUTPUT

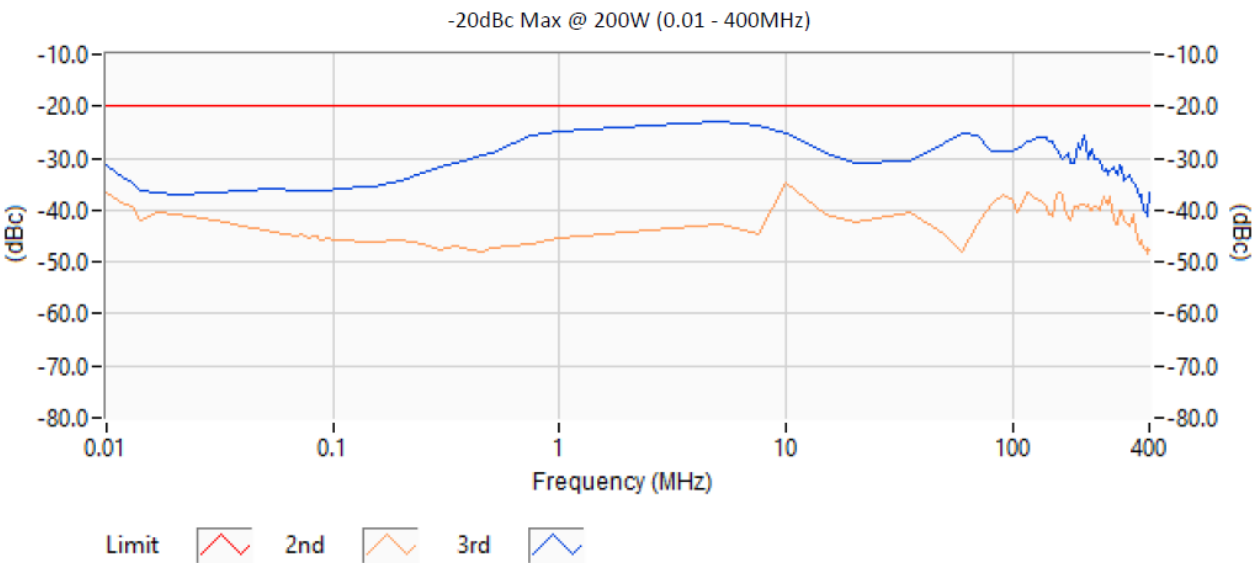

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964
To order AR Products, call: 215.723.8181. For an applications engineer call: 800.933.8181. Direct to Service call: 215.723.0275 or email: service@arworld.us
For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us
Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 accredited

Revision 062921

