



产 品 手 册

仪器型号： AR功率放大器1000w1000h

西安安泰测试科技有限公司

仪器维修|租赁|销售|测试

地址:西安市高新区纬二十六路 369 号

网址: www.agitekservice.com

电话: 400-876-5512

座机: 029-88827159

Amplifiers

Model 1000W1000H

Features:

- 1200 W typical CW, 80 - 1000 MHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring, logging and protection
- Touch screen display
- Forward and reverse power monitoring
- VSWR monitor with user settable limit
- User settable ALC
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing

To view our full amplifier portfolio visit: www.arworld.us/amplifiers

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
info@arworld.us
www.arworld.us
ISO 9001:2015 Certified
ISO 17025 :2017 Accredited

The Model 1000W1000H is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a typical of 1200 W across its operating bandwidth of 80 - 1000 MHz. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.

A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

This is a multiple purpose amplifier. The low level of spurious signals and linearity make it ideal for use as a driver in testing wireless and communication components and subsystems. By covering such a wide bandwidth, it is suitable for 5G testing applications. Due to the Class A design, it is also suitable for EMC Test applications where continued operation into high VSWR loads including open and short circuits is required.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.



Model 1000W1000H

- 1150 W, 80 - 650 MHz
- 1000 W, 650-1000 MHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (80 – 650 MHz)	PSAT	1100	1250	>1400	W
Rated Power Output (650 - 1000 MHz)	PSAT	1000	1100	>1200	W
Input for Rated Output	Pin			1	mW
				0	dBm
Power Output @ 3dB Compression (80 – 650 MHz)	P3dB	1100	1250	>1400	W
Power Output @ 3dB Compression (650 – 1000 MHz)	P3dB	1000	1100	>1200	W
Power Output @ 1dB Compression (80 – 650 MHz)	P1dB	1050	1150	>1200	W
Power Output @ 1dB Compression (650 – 1000 MHz)	P1dB	950	1000	>1100	W
Operating Frequency	BW	80		1000	MHz
Gain (Small Signal)		62	65	66	dB
Gain Reduction Adjustment (when below gain compression)		20	22	55	dB
Flatness @ small signal	ΔG		± 1.5	± 2.0	dB
Input Impedance	Z in		50		Ohm
			1.3:1	1.5:1	VSWR
Output Impedance	Z out		50		Ohm
3 rd Order Intercept	IP3		+66		dBm
Noise Figure	NF		6	8	dB
Harmonic Distortion @ 1000 W	H2, H3		-40	-20	dBc
Spurious			-73		dBc
Power Consumption	P _D			3750	W
Modulation Capability	AM, FM or Pulse				

Absolute Maximum Rating				
Exceeding any of the limits listed here may result in permanent damage to the device.				
Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected			100	%
Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.				
AC Power (single phase)	200		240	VAC
AC Power	47		63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			1000	m
Shock/Vibration	Normal Truck Transport			



Model 1000W1000H

- 1150 W, 80 - 650 MHz
- 1000 W, 650-1000 MHz

Mechanical Specifications		
Parameters	Typical	Unit
Dimensions (26U Rack) (W x H x D)	57.3 x 136.0 x 67.1	cm
	22.6 x 53.5 x 26.5	in
Weight	156	kg
	343	lb
Cooling	Forced air (self-contained fans) Side inlets / rear outlet $\Delta t = +7^{\circ}\text{C}$ (typical)	
Acoustical Noise (Measured @ 1 meter from the front)	64 (typical)	dBA

Regulatory Compliance	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	EAR99

Connector interfaces	
Function	Type
RF input	N female (50 Ω), rear
RF output	7-16 DIN female (50 Ω), rear
RF sample	N female (50 Ω), rear (60dB typical)
IEEE-488	24-pin
RS-232	9-pin subminiature D female
RS-232 (fiber optic)	ST
USB 2.0	Type B
Ethernet	RJ-45
Interlock	15-pin subminiature D female
AC Input	5-meter harmonized power cord supplied with amplifier. The power cord is left open-ended to allow for facility power connection of user's choice.

- Model 1000W1000H
- 1150 W, 80 - 650 MHz
 - 1000 W, 650-1000 MHz


Ordering Options

1000W1000H	-	N	-	R	-	716	-	
Model		RF IN Conn Location, Type		RF OUT Conn Location, Type		RF Sample Ports		

Connector Location		RF Sample Ports	
Front	F	Front	SPF
Rear	R	Rear	SPR

Contact your AR RF/Microwave Instrumentation Sales Associate for specific model configuration pricing.


Envelope Drawing

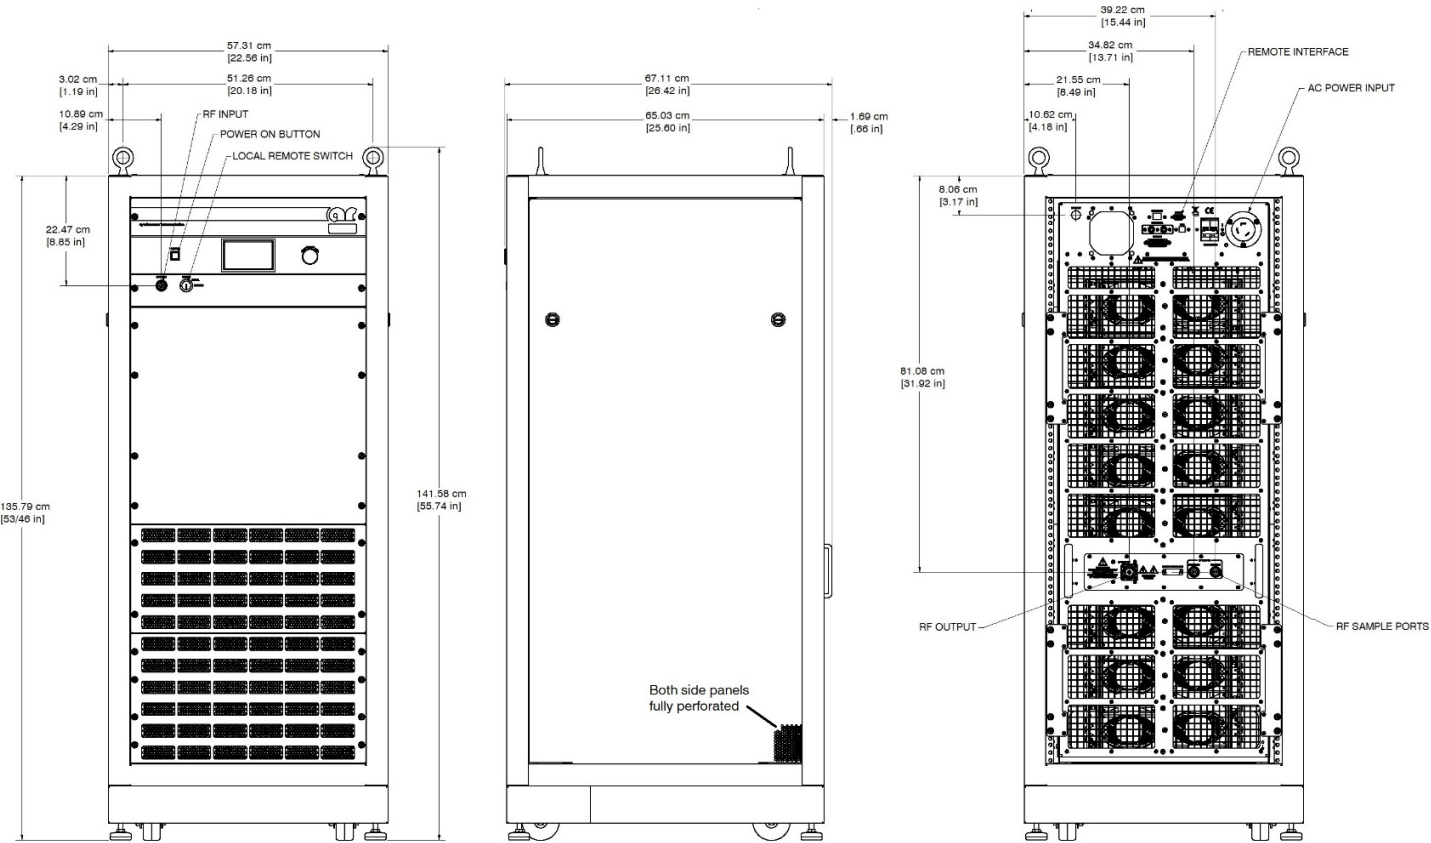

Model 1000W1000H

- 1150 W, 80 - 650 MHz
- 1000 W, 650-1000 MHz

TYPICAL PSAT POWER @ 0 dBm INPUT

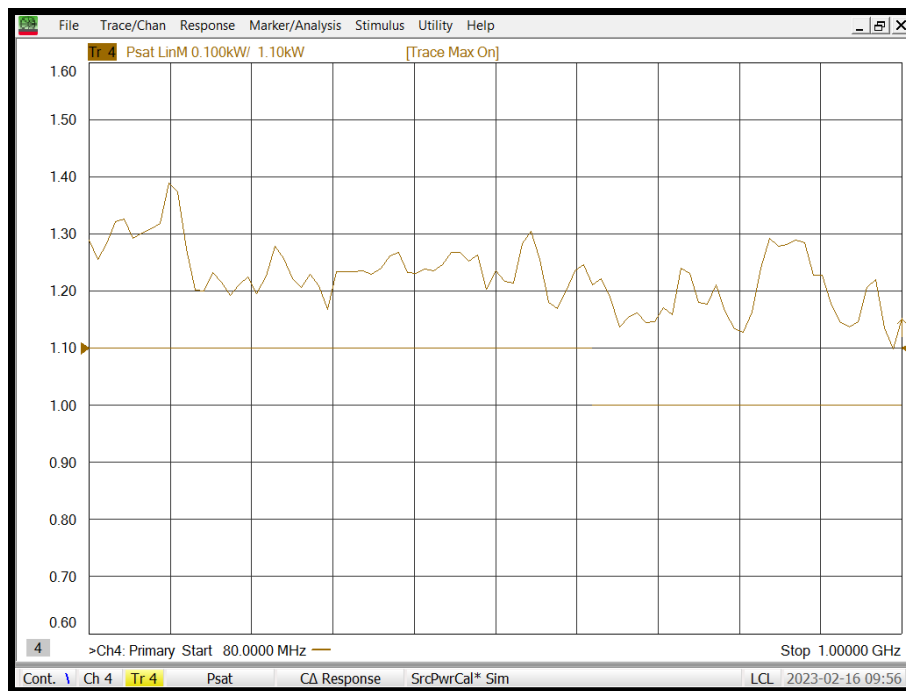

TYPICAL POWER @ P3 dB COMPRESSION




AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964 • 215-723-8181 • info@arworld.us • www.arworld.us • ISO 9001:2015 Certified • ISO 17025:2017 Accredited


Model 1000W1000H

- 1150 W, 80 - 650 MHz
- 1000 W, 650-1000 MHz

TYPICAL POWER @ P1dB COMPRESSION

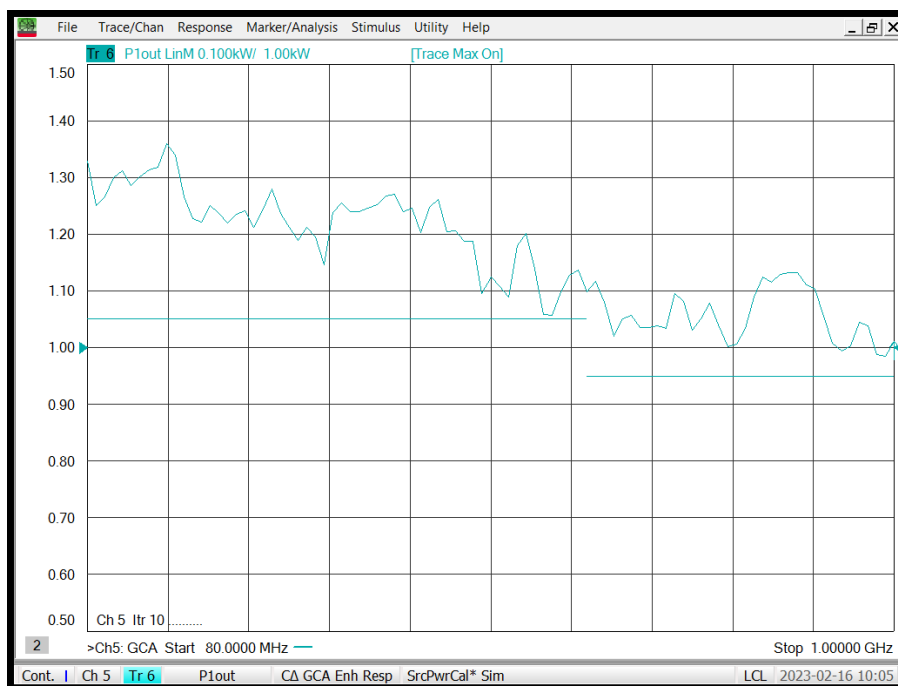


TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

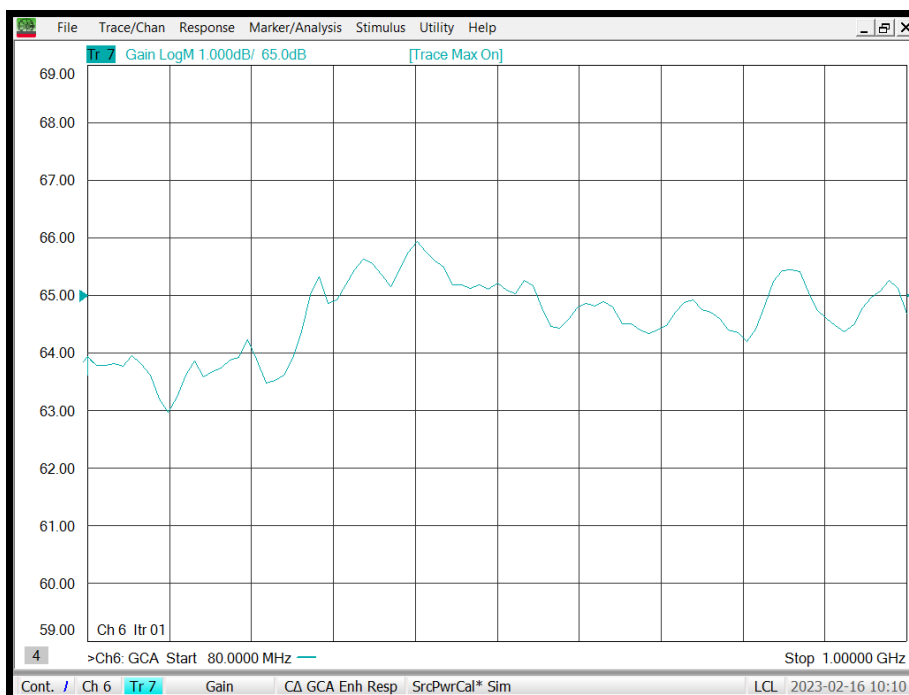


- Model 1000W1000H
- 1150 W, 80 - 650 MHz
 - 1000 W, 650-1000 MHz

TYPICAL 2nd HARMONICS @ 1000 W

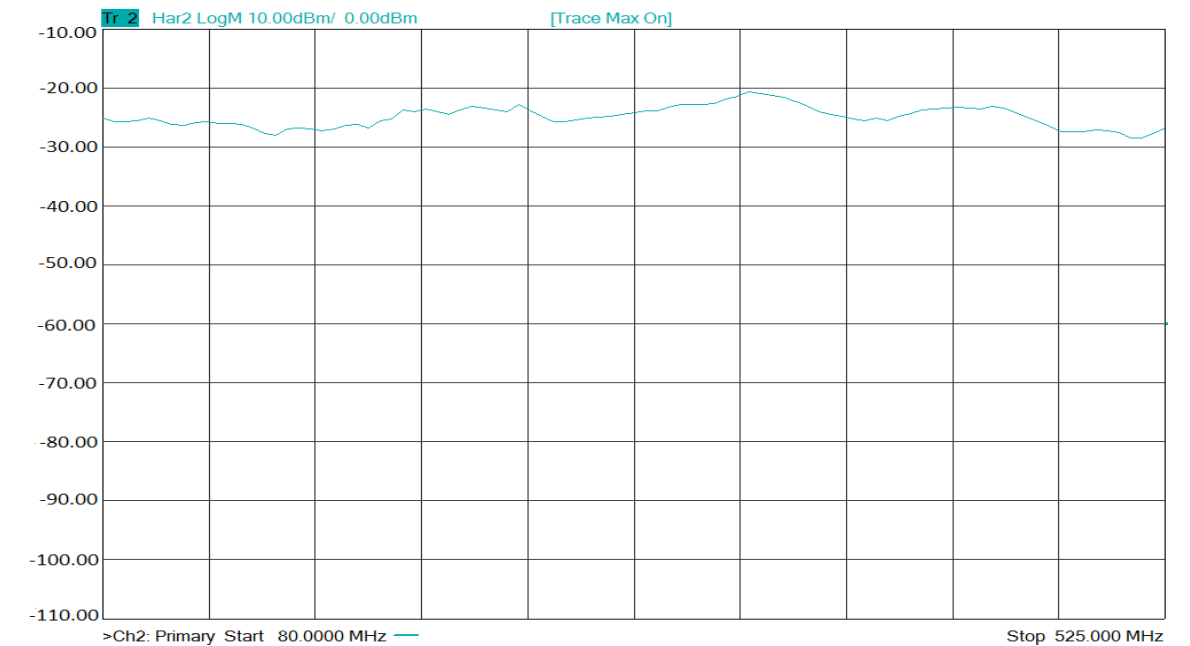


TYPICAL 3rd HARMONICS @ 1000 W

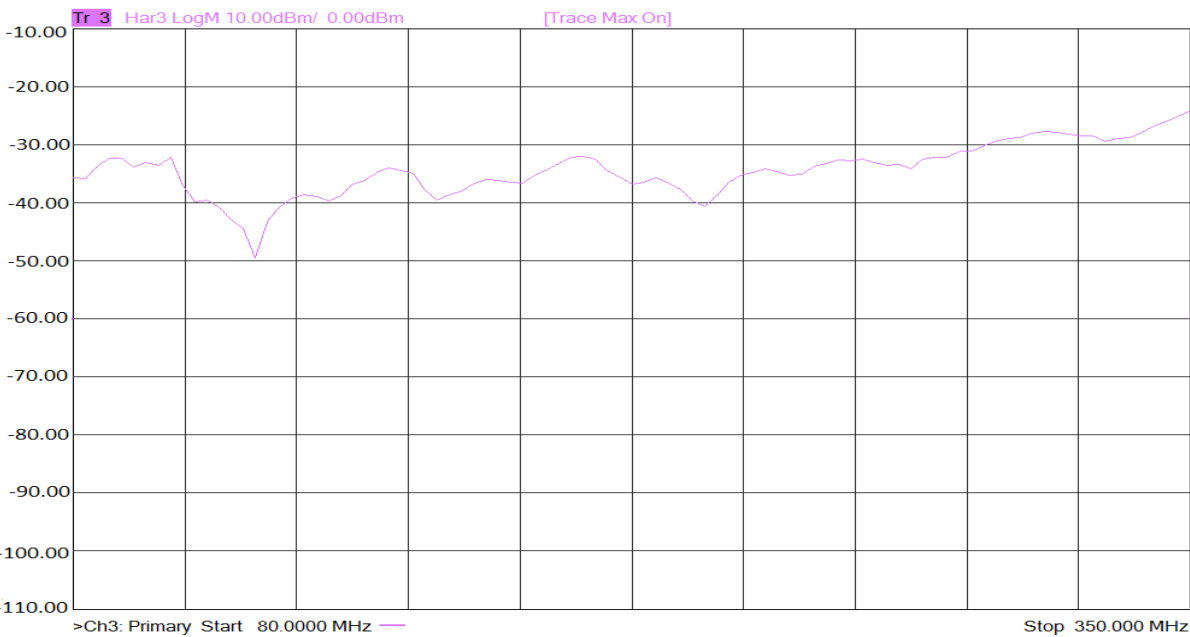


- Model 1000W1000H
- 1150 W, 80 - 650 MHz
 - 1000 W, 650-1000 MHz

TYPICAL INPUT VSWR

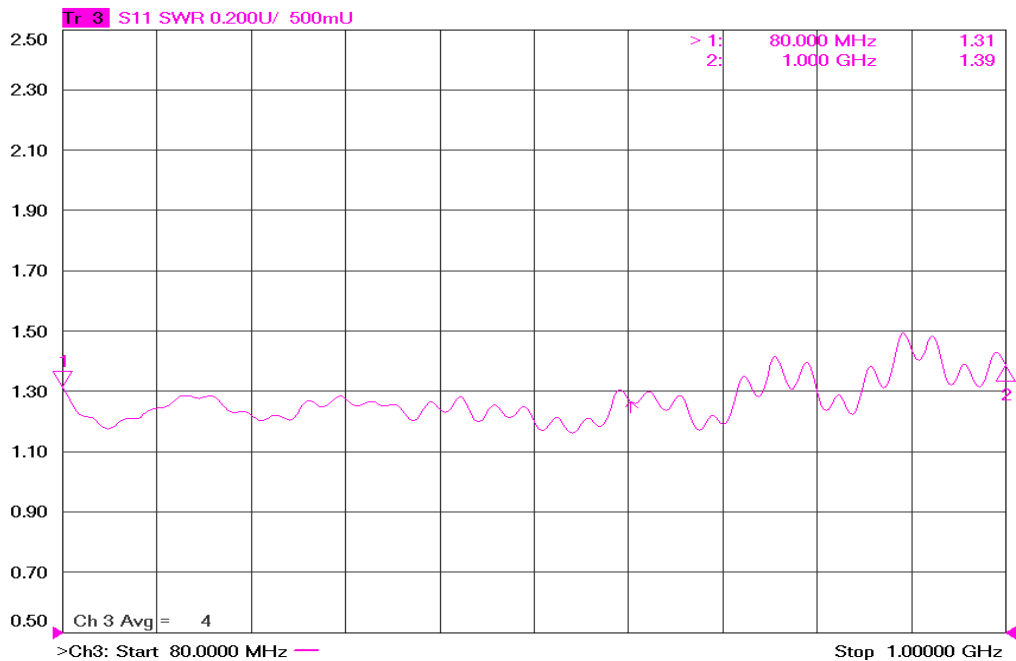

TYPICAL NOISE FIGURE

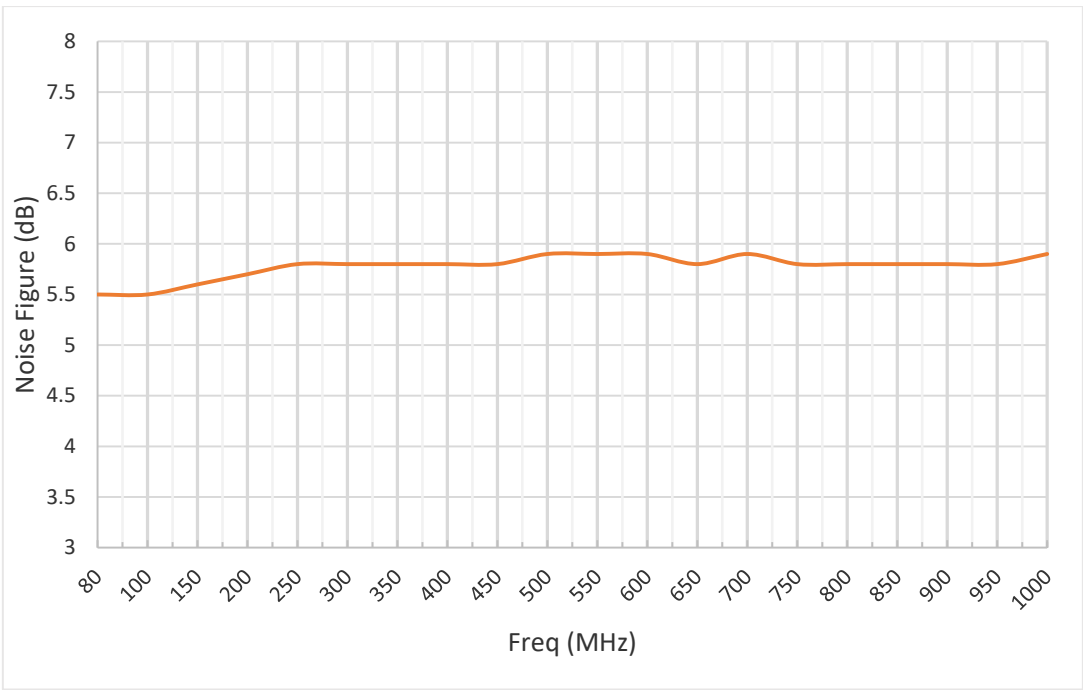

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964
To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: service@arworld.us
For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us
Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 accredited

Revision 021623

