



# 产 品 手 册

仪器型号: 1000S1G6C

西安安泰测试科技有限公司

仪器维修|租赁|销售|测试

# Amplifiers

## Model 1000S1G6C

### Features:

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring and protection
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise

### Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing

To view our full amplifier portfolio visit:  
[www.arworld.us/amplifiers](http://www.arworld.us/amplifiers)

AR RF/Microwave Instrumentation  
160 Schoolhouse Rd  
Souderton, PA 18964  
215.723.8181  
[info@arworld.us](mailto:info@arworld.us)  
[www.arworld.us](http://www.arworld.us)  
ISO 9001:2015 Certified  
ISO 17025:2017 Accredited

The Model 1000S1G6C is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a minimum of 1000 W across its operating bandwidth of 1.0 - 5.0 GHz and 700 W from 5.0 - 6.0 GHz. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.

A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

This is a multiple purpose amplifier. The low level of spurious signals and linearity make it ideal for use as a driver in testing wireless and communication components and subsystems. By covering such a wide bandwidth, it is suitable for 5G testing applications. Due to the Class A design, it is also suitable for EMC Test applications where continued operation into high VSWR loads including open and short circuits is required

The export classification for this equipment is 3A001. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.



Model 1000S1G6C

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz

### Electrical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (1.0 - 5.0 GHz)	PSAT	1000	1200	>1500	W
Rated Power Output (5.0 - 6.0 GHz)	PSAT	700	800	>950	W
Input for Rated Output	Pin			1	mW
				0	dBm
Power Output @ 3 dB Compression (1.0 - 5.0 GHz)	P3dB	950	1200	>1500	W
Power Output @ 3 dB Compression (5.0 - 6.0 GHz)	P3dB	650	800	>950	W
Power Output @ 1 dB Compression (1.0 - 5.0 GHz)	P1dB	800	950	>1300	W
Power Output @ 1 dB Compression (5.0 - 6.0 GHz)	P1dB	600	750	>850	W
Operating Frequency	BW	1.0		6.0	GHz
Gain (Small Signal)		60	64.5	69	dB
Gain Reduction Adjustment (when below gain compression)		10	12	15	dB
Flatness @ small signal (-20 dBm input) (1.0 - 5.0 GHz)	$\Delta G$		$\pm 2.0$	$\pm 2.5$	dB
Flatness @ small signal (-20 dBm input) (5.0 - 6.0 GHz)	$\Delta G$		$\pm 2.0$	$\pm 2.5$	dB
Input Impedance	Z in		50		Ohm
			1.5:1	2.0:1	VSWR
Output Impedance	Z out		50		Ohm
3 <sup>rd</sup> Order Intercept	IP3		+68		dBm
Noise Figure	NF		10		dB
Harmonic Distortion @ 800 W for entire band except 2 - 3 GHz	H2, H3		-30	-20	dBc
Harmonic Distortion @ 800 W for 2 - 3 GHz	H2, H3		-22	-18	dBc
Spurious			-73		dBc
Power Consumption	PD			8.5	kW

### Absolute Maximum Rating

Exceeding any of the limits listed here may result in permanent damage to the device.

Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	3:1	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry. However, mismatch above 3:1 may limit output to 250 watts reflected power.			25	%
AC Power (3-phase) Low voltage option	200		240	VAC
AC Power (3-phase) High voltage option	380		415	VAC
AC Power	47		63	Hz
Ambient Temperature	+5	+25	+35	°C
Storage Temperature	-20		+50	°C
Altitude			1000	m
Shock/Vibration	Normal Truck Transport			

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964 • 215-723-8181 • info@arworld.us • www.arworld.us • ISO 9001:2015 Certified • ISO 17025:2017 Accredited



Model 1000S1G6C

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz

Mechanical Specifications		
Parameters	Typical	Unit
Dimensions (26U Rack) (W x H x D)	57.3 x 136.0 x 95.5	cm
	22.6 x 53.5 x 37.6	in
Weight	273	kg
	600	lb
Cooling	Forced air (self-contained fans) Side inlets / rear outlet $\Delta t = +10^{\circ}\text{C}$ (typical)	
Acoustical Noise (Measured @ 1 meter from the front)	68 (typical)	dBA

Regulatory Compliance	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	3A001

Connector interfaces	
Function	Type
RF input	N female (50 $\Omega$ )
RF output	7-16 DIN female (50 $\Omega$ ), rear
RF sample	N female (50 $\Omega$ ), (60dB typical)
IEEE-488	24-pin
RS-232	9-pin subminiature D female
RS-232 (fiber optic)	ST
USB 2.0	Type B
Ethernet	RJ-45
Interlock	15-pin subminiature D female
AC Input	5-meter harmonized power cord supplied with amplifier. The power cord is left open ended to allow for facility power connection of user's choice.



- Model 1000S1G6C
- 1000 W CW, 1.0 - 5.0 GHz
  - 700 W CW, 5.0 - 6.0 GHz

## Ordering Options

1000S1G6C	-	-	N	-	R	-	716	-	-	-
Model			RF IN Conn Location, Type		RF OUT Conn Location, Type		Primary Power			RF Sample Ports


CONNECTOR LOCATION	
Front	F
Rear	R

PRIMARY POWER	
200-240 VAC	LV
380-415 VAC	HV

RF SAMPLE PORTS	
Front	SPF
Rear	SPR

Contact your AR RF/Microwave Instrumentation Sales Associate for specific model configuration pricing.


## Envelope Drawing

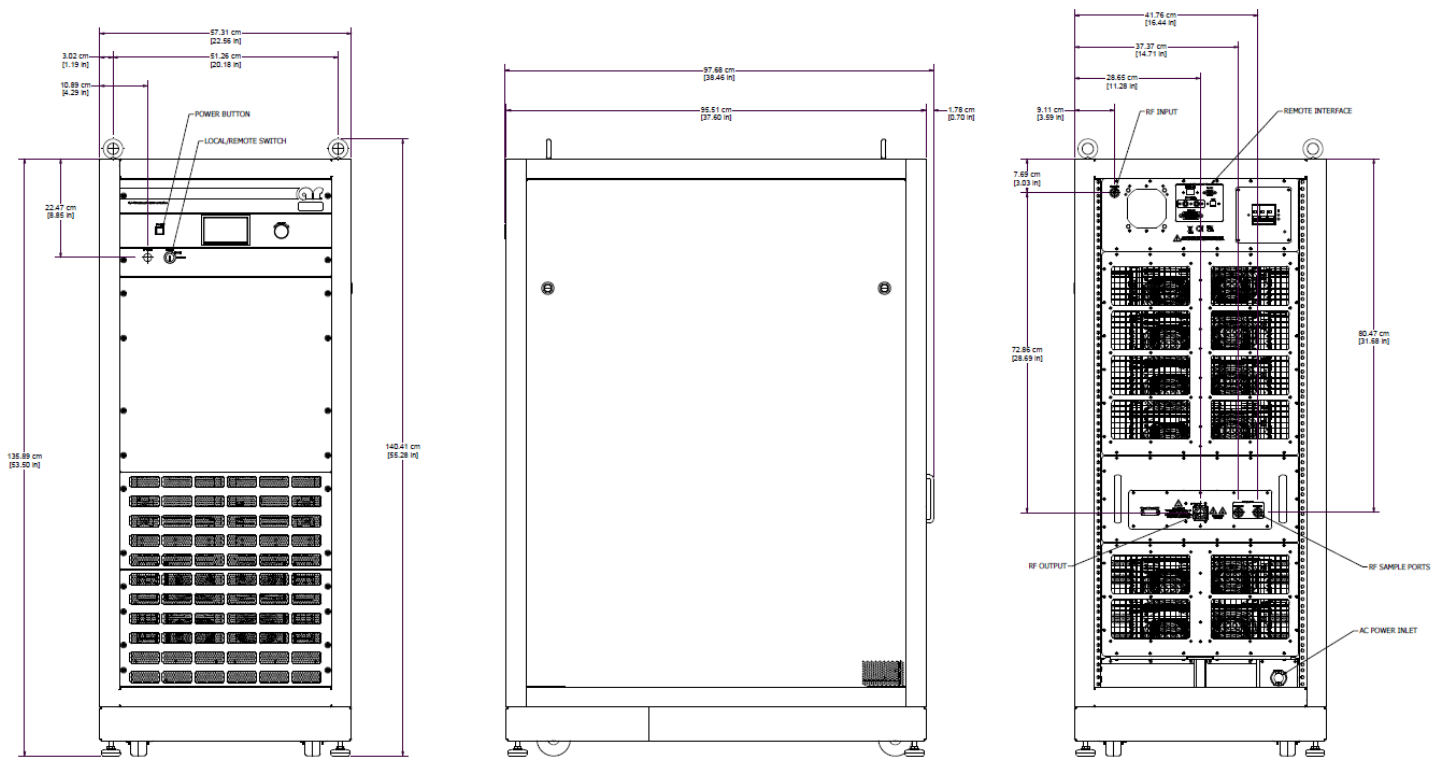


Model 1000S1G6C

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz

#### TYPICAL PSAT POWER @ 0 dBm

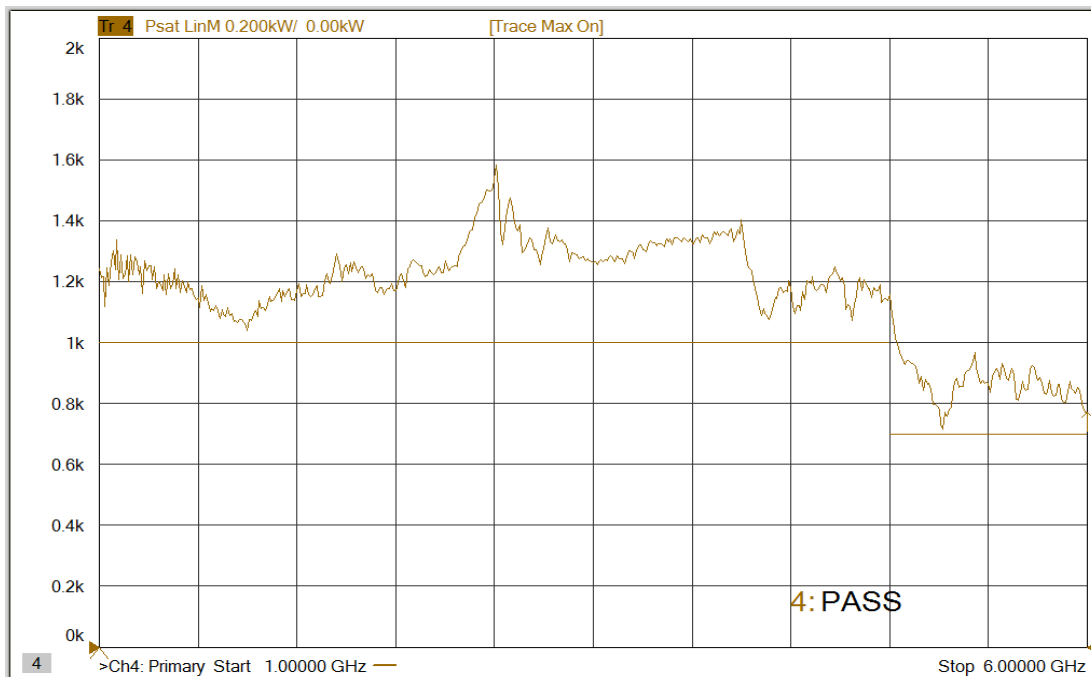


#### TYPICAL POWER @ P3 dB COMPRESSION

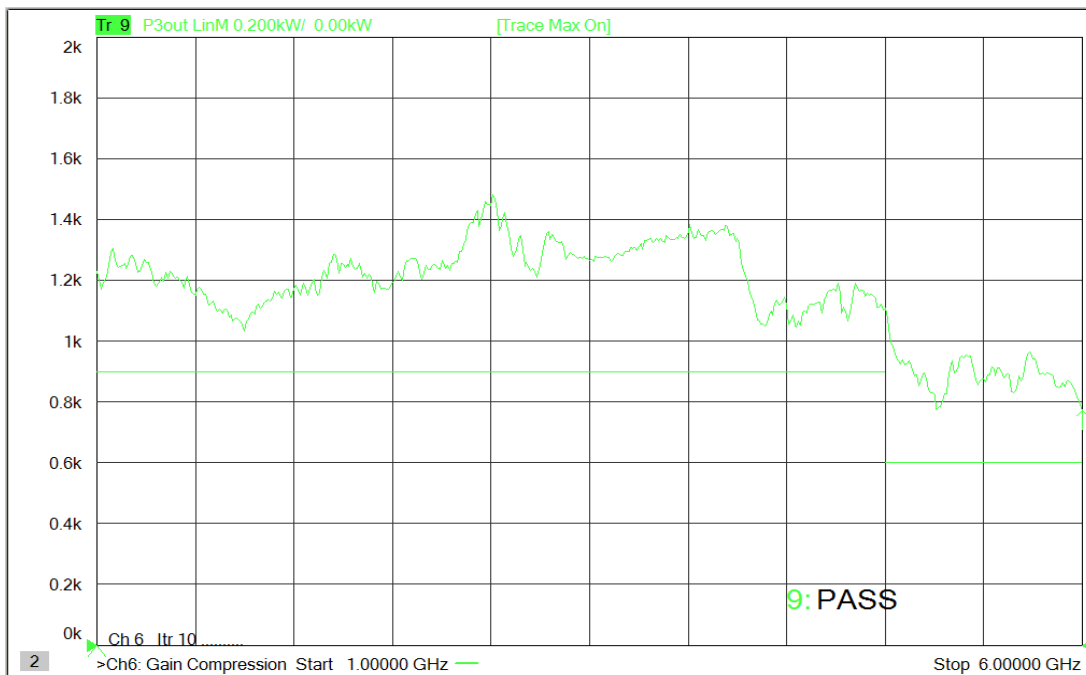


Model 1000S1G6C

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz

### TYPICAL POWER @ P1 dB COMPRESSION

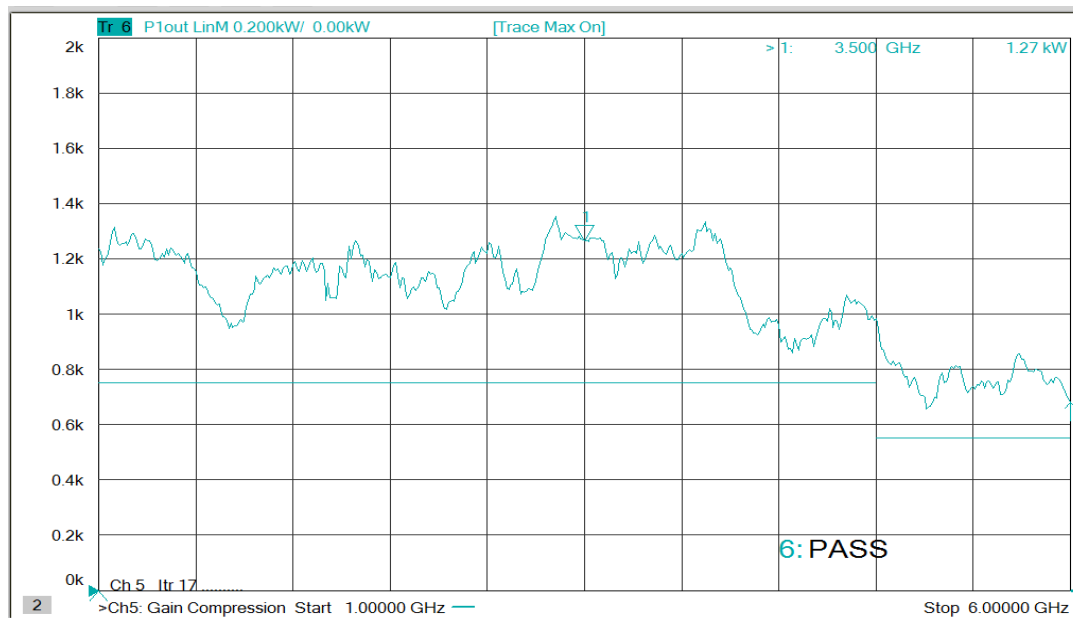


### TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

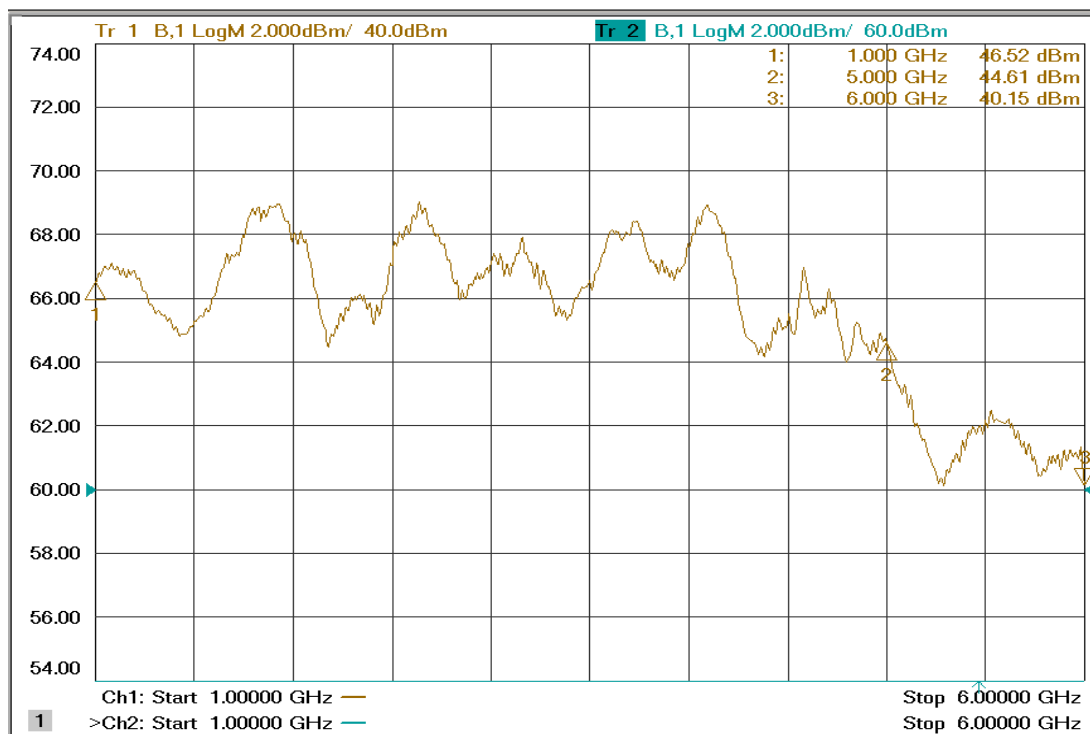


Model 1000S1G6C

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz

### TYPICAL 2<sup>ND</sup> HARMONIC @ 800 W

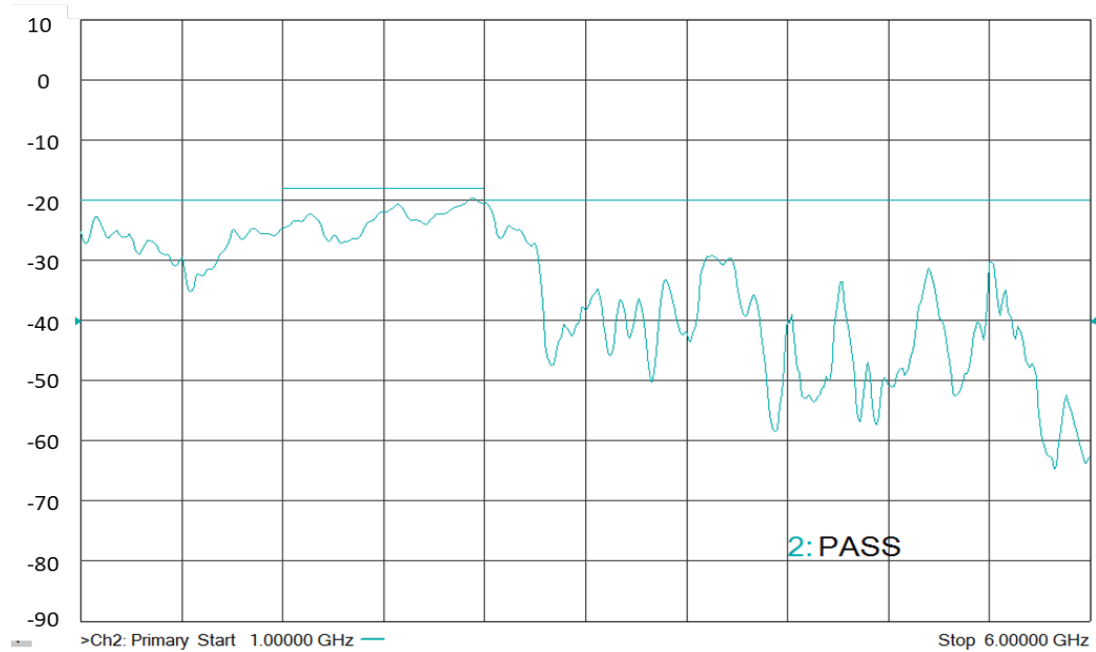


### TYPICAL 3<sup>RD</sup> HARMONIC @ 800 W

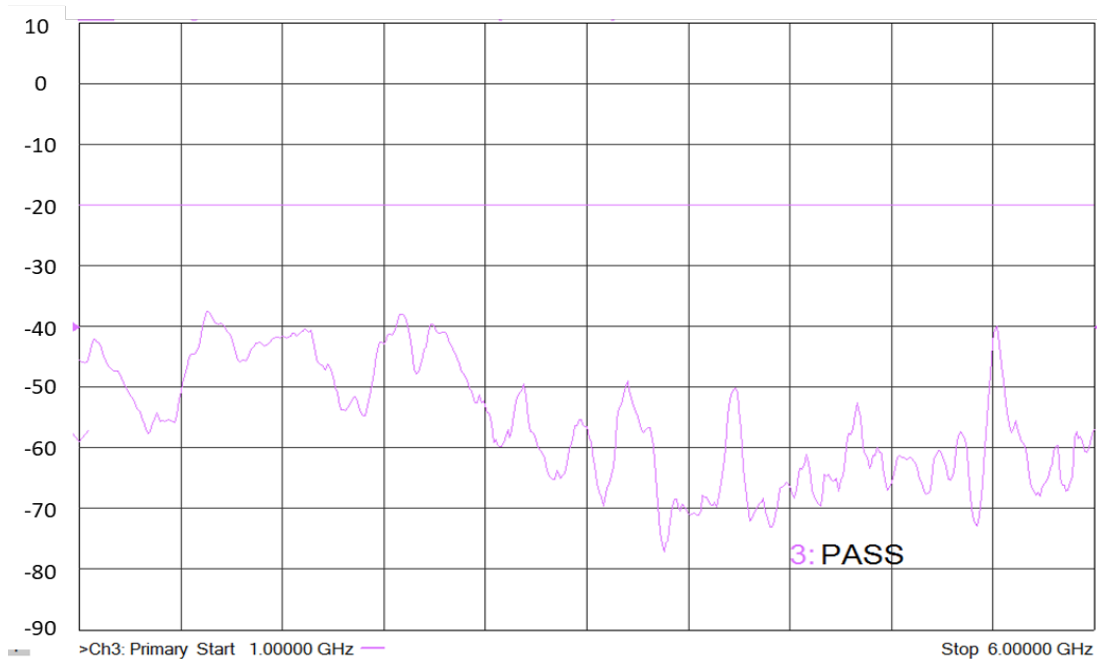


Model 1000S1G6C

- 1000 W CW, 1.0 - 5.0 GHz
- 700 W CW, 5.0 - 6.0 GHz

### TYPICAL INPUT VSWR

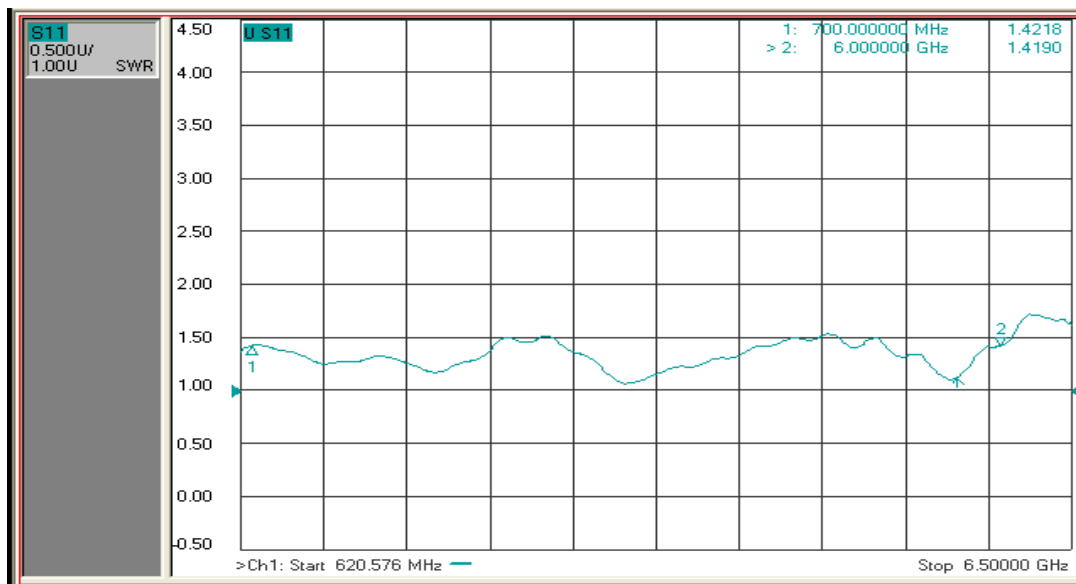

### TYPICAL NOISE FIGURE

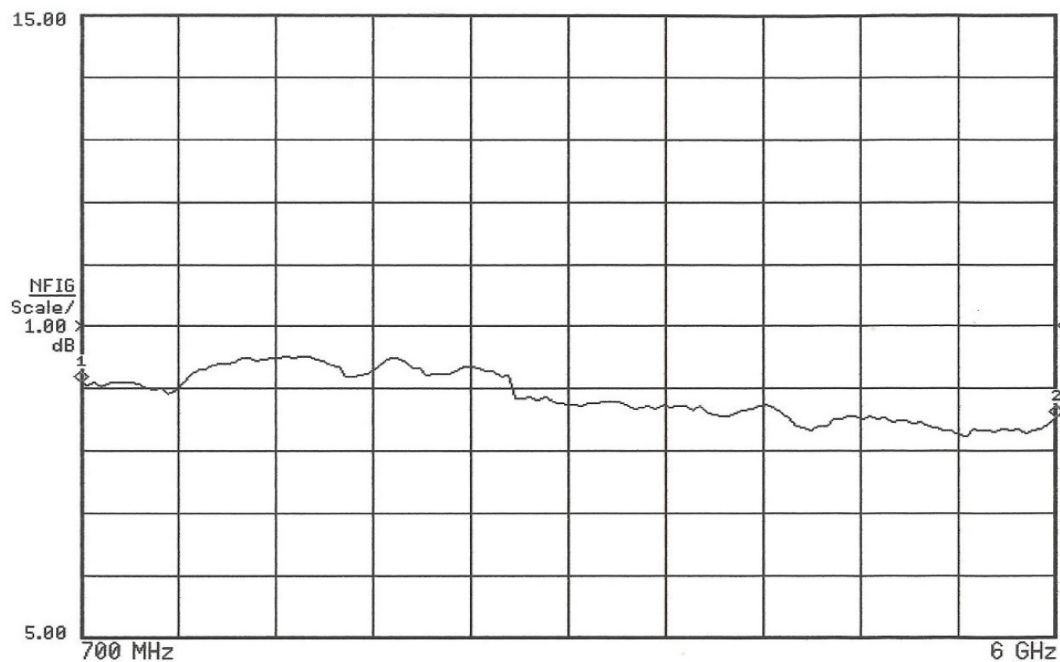

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964  
To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: [service@arworld.us](mailto:service@arworld.us)  
For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us  
Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 certified

Revision 063022

