
NI-5783

Specifications

2025-03-10



Contents

NI-5783 Specifications	3
------------------------------	---

NI-5783 Specifications

NI-5783 Specifications

FlexRIO Documentation

Table 1. FlexRIO Documentation Locations and Descriptions

Document	Location	Description
Getting started guide for your FlexRIO FPGA module or Controller for FlexRIO	Available from the Start menu and at ni.com/manuals .	Contains installation instructions for your FlexRIO system.
Specifications document for your FlexRIO FPGA module or Controller for FlexRIO	Available from the Start menu and at ni.com/manuals .	Contains specifications for your FlexRIO FPGA module or Controller for FlexRIO.
Getting started guide for your adapter module	Available from the Start menu and at ni.com/manuals .	Contains signal information, examples, and CLIP details for your adapter module.
Specifications document for your adapter module	Available from the Start menu and at ni.com/manuals .	Contains specifications for your adapter module.
LabVIEW FPGA Module Help	Embedded in LabVIEW Help and at ni.com/manuals .	Contains information about the basic functionality of the LabVIEW FPGA Module.
Real-Time Module Help	Embedded in LabVIEW Help and at ni.com/manuals .	Contains information about real-time programming concepts, step-by-step instructions for using LabVIEW with the Real-Time Module, reference information about Real-Time Module VIs and functions, and information about LabVIEW features on real-time operating systems.
FlexRIO Help	Available from the Start menu and at ni.com/manuals .	Contains information about the FPGA module front panel connectors and I/O, controller for FlexRIO front panel connectors and I/O,

Document	Location	Description
		programming instructions, and adapter module component-level IP (CLIP).
LabVIEW Examples	Available in NI Example Finder. In LabVIEW, click Help » Find Examples » Hardware Input and Output » FlexRIO .	Contains examples of how to run FPGA VIs and Host VIs on your device.
IPNet	Located at ni.com/ipnet .	Contains LabVIEW FPGA functions and intellectual property to share.
FlexRIO product page	Located at ni.com/flexrio .	Contains product information and data sheets for FlexRIO devices.

NI-5783 Pinout

Use the pinout to connect to terminals on the NI-5783.

Figure 1. NI-5783 Front Panel Connector Pinout




Table 2. Signal Descriptions

Signal Name	Description
AO 0 to AO 3	Analog input channel, 50 Ω , single-ended, DC-coupled
AI 0 to AI 3	Analog output channel, 50 Ω , single-ended, DC-coupled
CLK/REF IN	External Reference Clock or Sample Clock input
TRIG	Trigger input and output channel
AUX I/O	Digital I/O and PFI connector



Caution To avoid damaging the NI-5783, disconnect all connected signals before powering down. Connect signals after the adapter module powers on by the FlexRIO FPGA module or Controller for FlexRIO.



Caution Connections that exceed the maximum ratings of connectors on the NI-5783 might damage the device and the chassis. NI is not liable for any damage resulting from such connections.

AUX I/O Connector

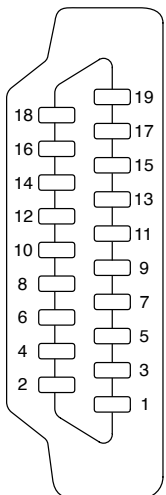
Figure 1. AUX I/O Connector Pinout

Table 3. Signal Descriptions

Pin	Signal	Signal Description
1	DIO Port 0 (0)	Bidirectional single-ended (SE) digital I/O (DIO) data channel.
2	GND	Ground reference for signals.
3	DIO Port 0 (1)	Bidirectional SE DIO data channel.
4	DIO Port 0 (2)	Bidirectional SE DIO data channel.
5	GND	Ground reference for signals.
6	DIO Port 0 (3)	Bidirectional SE DIO data channel.
7	DIO Port 1 (0)	Bidirectional SE DIO data channel.
8	GND	Ground reference for signals.
9	DIO Port 1 (1)	Bidirectional SE DIO data channel.
10	DIO Port 1 (2)	Bidirectional SE DIO data channel.
11	GND	Ground reference for signals.
12	DIO Port 1 (3)	Bidirectional SE DIO data channel.
13	PFI 0	Bidirectional SE DIO data channel.
14	NC	No connect.
15	PFI 1	Bidirectional SE DIO data channel.
16	PFI 2	Bidirectional SE DIO data channel.
17	GND	Ground reference for signals.
18	+5 V	+5 V power (10 mA maximum).
19	PFI 3	Bidirectional SE DIO data channel.



Caution The AUX I/O connector accepts a standard, third-party HDMI cable, but the AUX I/O port is not an HDMI interface. Do not connect the AUX I/O port on the NI-5783 to the HDMI port of another device. NI is not liable for any damage resulting from such signal connections.

Analog Input

General Characteristics

Number of channels	Four, single-ended, simultaneously sampled	
Connector Type	HDBNC (high-density BNC)	
Input type	50 Ω	
Input coupling	DC	
Sample rate		
Internal Sample Clock	100 MHz	
External Sample Clock	60 MHz to 100 MHz	
Analog-to-digital converter (ADC)		
Type	Quad, 16-bit	
Part number	AD9653	

Related information:

- [For more information about the ADC, refer to the AD9653 datasheet at www.analog.com.](http://www.analog.com)

Typical Specifications

Full-scale input range (normal operating conditions)
--

Elliptic		2.030 V _{pk-pk}
Butterworth		2.037 V _{pk-pk}
DC accuracy		
Elliptic	±[(0.80% × reading) + 3.5 mV]	
Butterworth	±[(1.00% × reading) + 3.75 mV]	
Input impedance		
Elliptic	50 Ω ± 0.5%	
Butterworth	50 Ω ± 0.8%	
Bandwidth (-3 dB)		
Elliptic	39.4 MHz	
Butterworth	39.5 MHz	

Table 4. AI Spectral Performance

SNR ^{1[1]}	SINAD ^[1]	ENOB (bits) ²	SFDR ³
74.5 dBFS	74.3 dBFS	12.05	-87 dBc

1. Measured at 10.1 MHz with a -1 dBFS signal adjusted to full-scale.

2. Calculated from SINAD corrected to fullscale.

3. Measured at 10.1 MHz with a -1 dBFS signal.



Note All AI spectral performance values apply to both the Elliptic and Butterworth variants.

Table 5. AI Noise Spectral Density

Filter Variant	nV/ $\sqrt{\text{Hz}}$	dBm/Hz	dBFS/Hz
Elliptic	17.5	-142.1	-152.2
Butterworth	17.8	-142.0	-152.1

Table 6. AI Channel Crosstalk (10 MHz)

Channel N \pm 1	Channel N \pm 2	Channel N \pm 3
-79 dBc	-87 dBc	-91 dBc



Note All AI channel crosstalk values apply to both the Elliptic and Butterworth variants.

Figure 1. AI Crosstalk

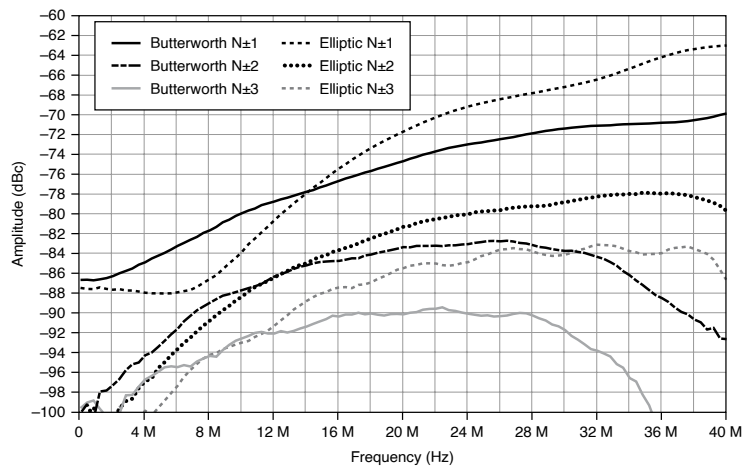


Figure 1. AI Frequency Response (Zoomed Out)

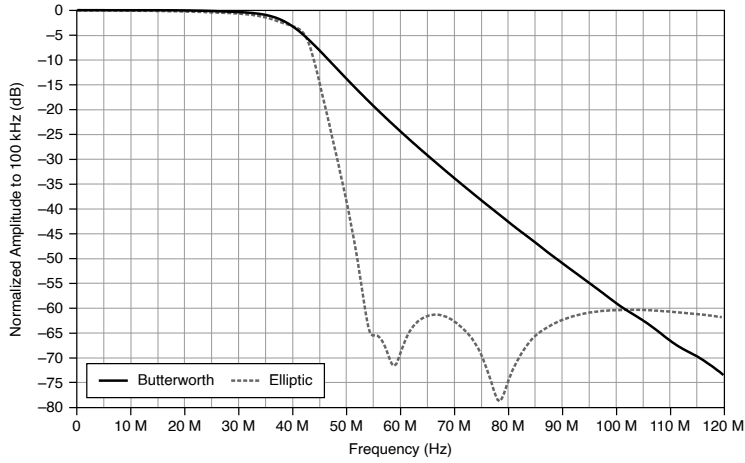


Figure 1. AI Frequency Response (Zoomed In)

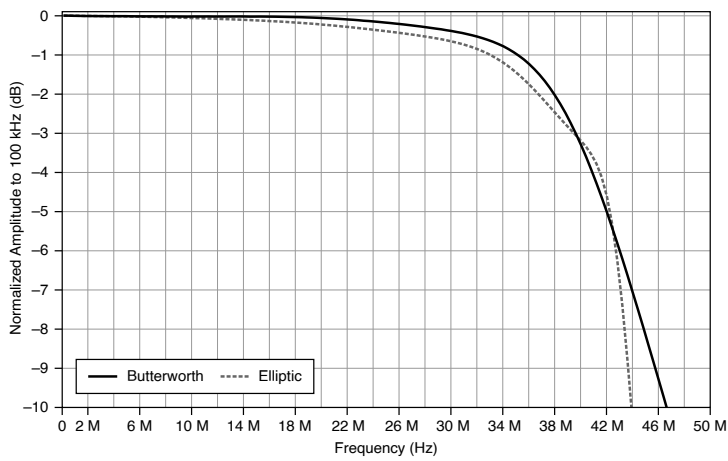


Figure 1. AI Step Response (Butterworth)

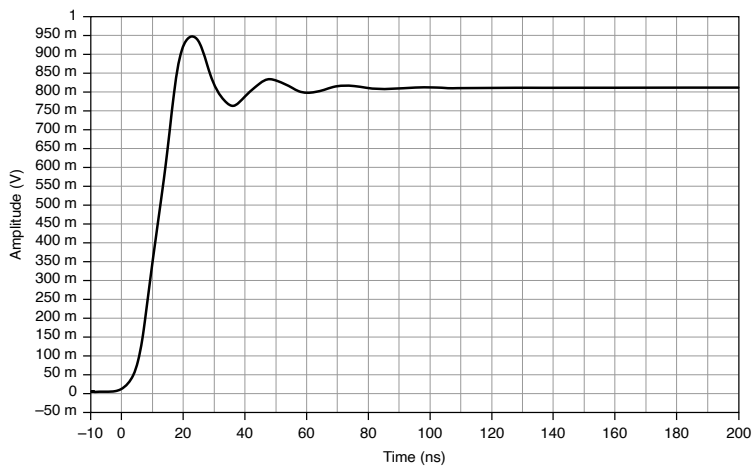


Figure 1. AI Step Response (Elliptic)



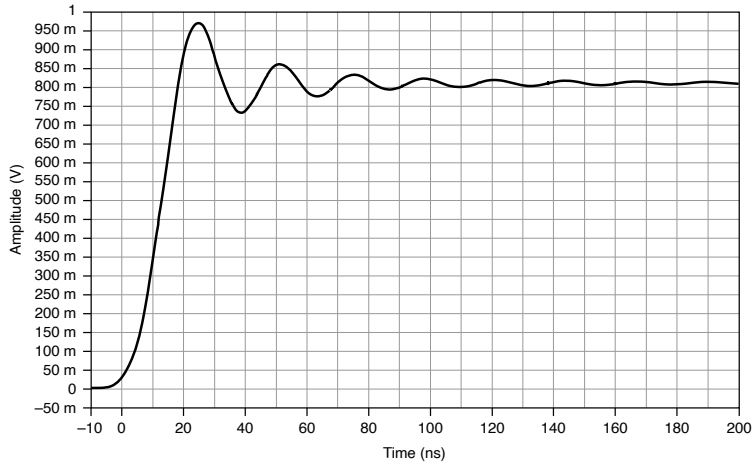


Figure 1. AI Spectral (10.1 MHz at -1 dBFS input signal, 6.1 kHz RBW, 10 Averages)

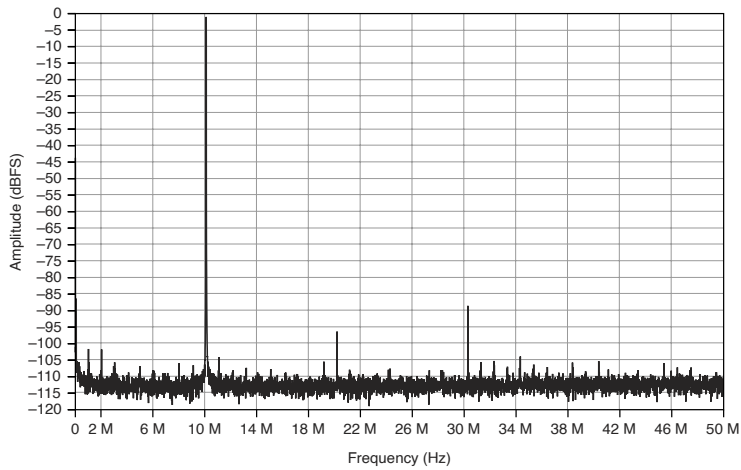

Note AI Spectral figure applies to both the Elliptic and Butterworth variants.

Figure 1. AI Return Loss

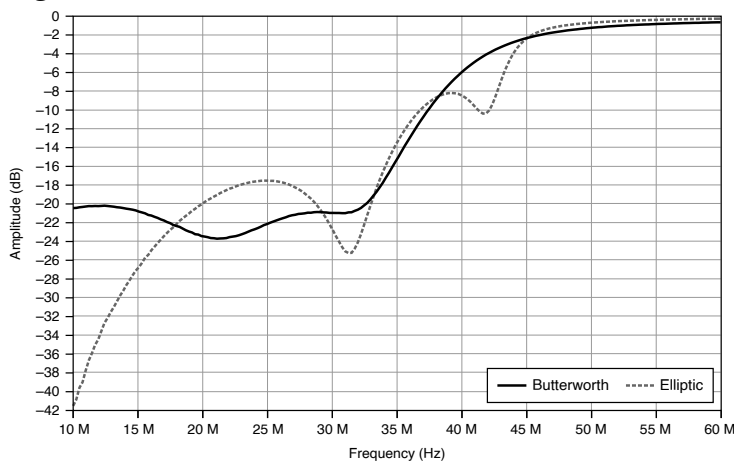

Analog Output

General Characteristics

Number of channels	Four, single-ended, simultaneously updated	
Connector type	HDBNC (high-density BNC)	
Output type	50 Ω	
Output coupling	DC	
Digital-to-analog converter (DAC)		
Type	Quad, 16-bit	
Part number	DAC3484	
Minimum analog input to analog output response time ⁴		
100 MS/s	1130 ns	
200 MS/s	720 ns	
400 MS/s	550 ns	

4. Minimum time to digitize a signal (AI) and output a response (AO). Time measured from signal entering the AI connector, passing into and out of the LabVIEW FPGA diagram, and observed at the AO connector.

Table 7. AO Sample Rates

Clocking Mode	Data Rate (per channel)	DAC Update Rate (per channel)
Internal Clock, 2x interpolation ⁵ [5]	400 MS/s	800 MS/s
Internal Clock, 4x interpolation (default clocking mode)	200 MS/s	800 MS/s
Internal Clock, 8x interpolation	100 MS/s	800 MS/s
External Clock, 2x interpolation ⁵ [5]	240 MS/s to 400 MS/s	480 MS/s to 800 MS/s
External Clock, 4x interpolation	120 MS/s to 200 MS/s	480 MS/s to 800 MS/s
External Clock, 8x interpolation	60 MS/s to 100 MS/s	480 MS/s to 800 MS/s

Related information:

- [For more information about the DAC, refer to the DAC3484 datasheet at \[www.ti.com\]\(http://www.ti.com\).](#)

Typical Specifications

Full-scale output range (normal operation conditions)	
50 Ω	1.001 V _{pk-pk}
High-Z	2.002 V _{pk-pk}
DC accuracy (into High-Z)	$\pm[(2.0\% \times \text{desired voltage}) + 4.4 \text{ mV}]$
Output impedance	50 $\Omega \pm 0.7\%$
SFDR ⁶	-81 dBc

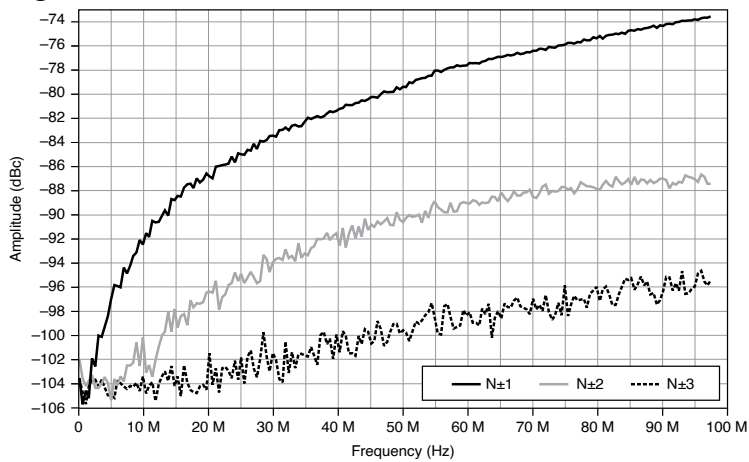
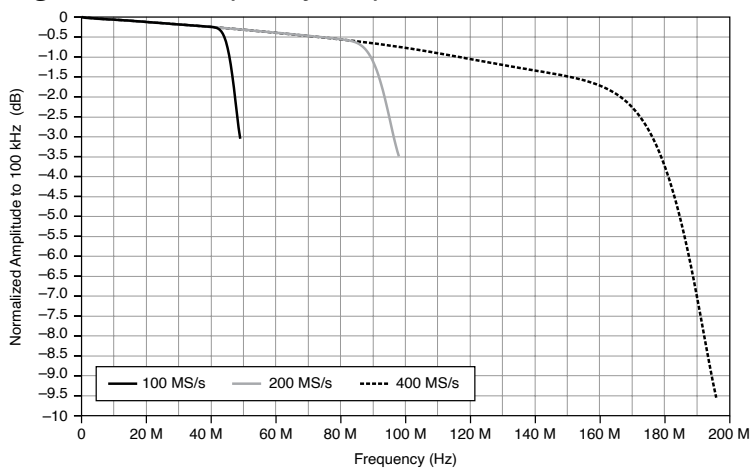
5. 400 MS/s with 2x interpolation is available only when operating in 2 channel analog output mode.

Table 8. AO Noise Spectral Density (into 50 Ω)

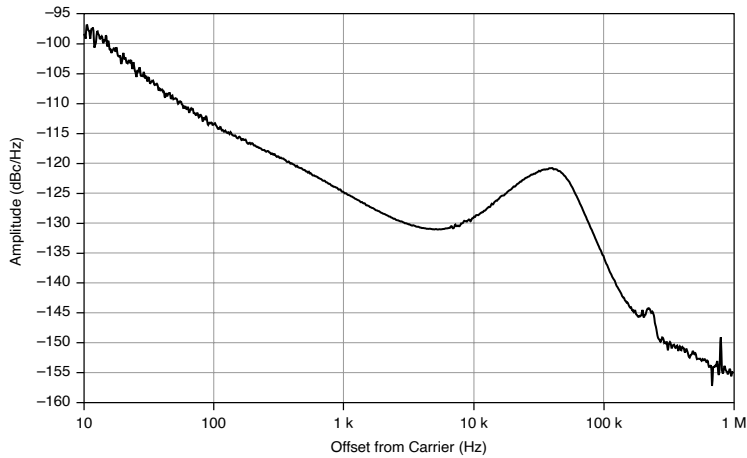
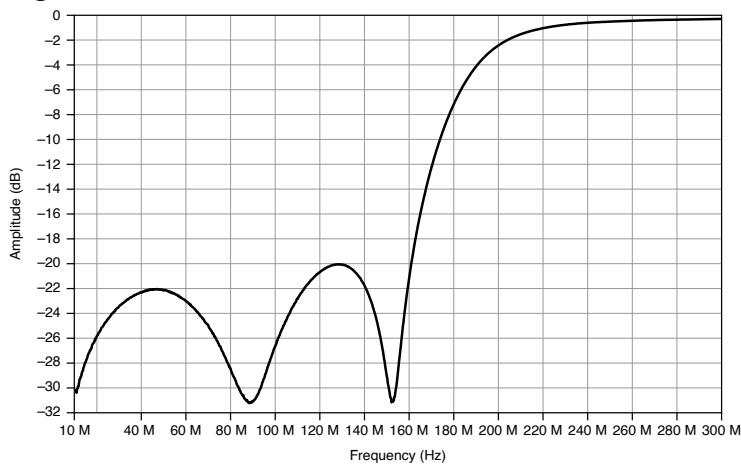
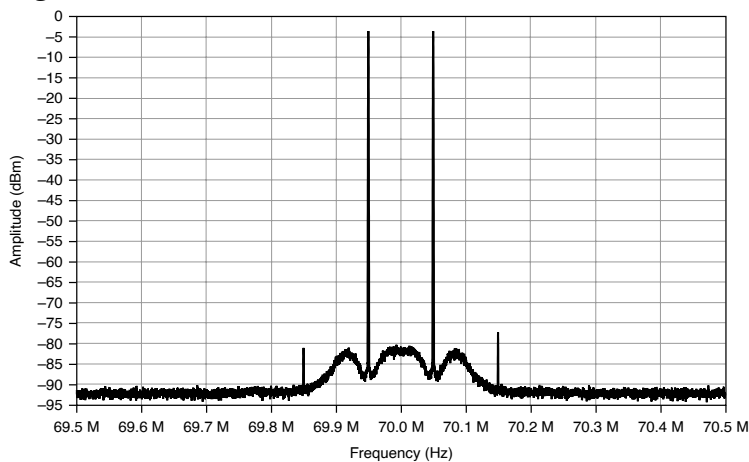
$\text{nV}/\sqrt{\text{Hz}}$	dBm/Hz	dBFS/Hz
5.8	-151.7	-155.7

Table 9. AO Channel Crosstalk (10 MHz)

Channel $N\pm 1$	Channel $N\pm 2$	Channel $N\pm 3$
-90 dBc	-98 dBc	-99 dBc

Figure 1. AO Crosstalk (into 50 Ω Load)**Figure 1.** AO Frequency Response Across Data Rate

6. 10.1 MHz tone at -1 dBFS.

Figure 1. AO Phase Noise (Signal at 12.1 MHz)**Figure 1. AO Return Loss****Figure 1. AO Two Tone, Each Tone at -7 dBFS, 69.95 MHz, and 70.05 MHz, 500 Hz RBW**

Note The noise floor in the above figure is limited by the noise floor of the measurement device. Refer to the AO Noise Spectral Density table for more information.

CLK/REF IN


Connector type	HDBNC (high-density BNC)
Input impedance	50 Ω
Input coupling	AC
Reference input voltage range	0.75 V _{pk-pk} to 5.2 V _{pk-pk}
Sample Clock input voltage range	0.4 V _{pk-pk} to 5.2 V _{pk-pk}
Absolute maximum voltage	± 8.0 VDC, 8.0 V _{pk-pk} AC
Duty cycle	45% - 55%

Clock Configuration	External Clock Type	External Clock Frequency	Description
Internal Clock PLL Off ⁷			The internal VCXO acts as a free-running Sample Clock.
Internal Clock PLL On (TbRef)		10 MHz	The internal VCXO locks to TbRefClk, which is provided through the backplane.
Internal Clock PLL On (CLK/REF IN)	Reference Clock	10 MHz	The internal VCXO locks to an external Reference Clock, which is provided through the

7. Default clocking configuration.

Clock Configuration	External Clock Type	External Clock Frequency	Description
			CLK/REF IN front panel connector.
External Clock PLL Off (CLK/REF IN)	Sample Clock	60 MHz to 100 MHz	An external Sample Clock can be provided through the CLK/REF IN front panel connector.

Internal VCXO phase noise	
10 Hz	-80 dBc/Hz
100 Hz	-110 dBc/Hz
1 kHz	-140 dBc/Hz
10 kHz	-150 dBc/Hz
100 kHz	-155 dBc/Hz
1 MHz	-160 dBc/Hz
10 MHz	-162 dBc/Hz

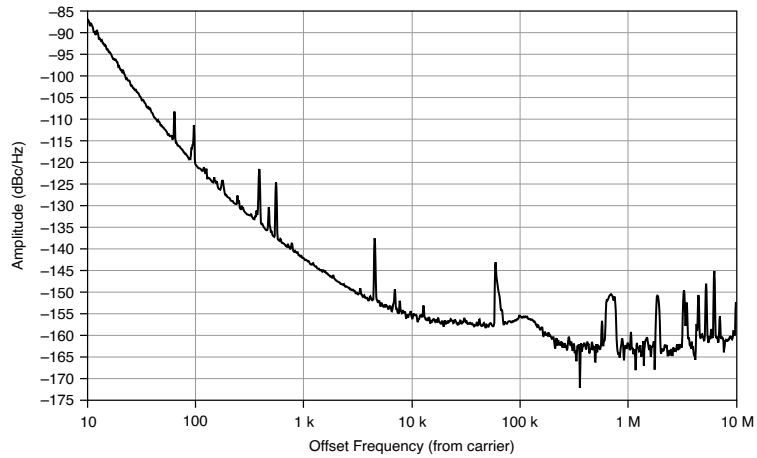Figure 1. Internal Sample Clock Phase Noise

TRIG General Characteristics

Number of channels	1, single-ended		
Connector type	HDBNC		
Coupling	DC		
Impedance			
Input	10 kΩ		
Output	50 Ω		
Logic level	3.3 V LVCMOS		
Voltage			
V _{IH_MIN}			2 V

V_{IL_MAX}	0.8 V
V_{OH_MIN} (unloaded)	3.1 V
V_{OL_MAX} (unloaded)	0.2 V
Absolute maximum voltage	± 20 VDC, +21 dBm (7.1 V _{pk-pk})

AUX I/O (Port 0 DIO <0..3>, Port 1 DIO <0..3>, and PFI <0..3>)

Number of channels	12 bidirectional (8 DIO and 4 PFI)
Connector type	HDMI
Interface standard	3.3 V LVCMOS
Interface logic	
Maximum V_{IL}	0.8 V
Minimum V_{IH}	2.0 V
Maximum V_{OL}	0.4 V
Minimum V_{OH}	2.7 V

Maximum V_{OH}	3.6 V
Z_{out}	$50\ \Omega \pm 20\%$
I_{out} (DC)	$\pm 2\text{ mA}$
Pull-down resistor	150 k Ω
Recommended operating voltage	-0.3 V to 3.6 V
Overvoltage protection	$\pm 10\text{ V}$
Maximum toggle frequency	100 MHz
+5 V maximum current	10 mA
+5 V voltage tolerance	4.2 V to 5 V

Power

Total power, typical operation	4.6 W
--------------------------------	-------

Physical

Dimensions	12.9 x 2.0 x 12.1 cm (5.1 x 0.8 x 4.7 in.)
------------	--

Weight	420 g (14.8 oz)
Front panel connectors	Ten HDBNC and one HDMI

Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

Operating Environment

Ambient temperature range	0 °C to 40 °C
Relative humidity range	10% to 90%, noncondensing

Storage Environment

Ambient temperature range	-40 °C to 71 °C
Relative humidity range	5% to 95%, noncondensing

Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse
Random vibration	
Operating	5 Hz to 500 Hz, 0.3 g RMS
Nonoperating	5 Hz to 500 Hz, 2.4 g RMS

Compliance and Certifications

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions

- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

Product Certifications and Declarations


Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.


For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region,

visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**— NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。 (For information about China RoHS compliance, go to ni.com/environment/rohs_china.)