
PXle-7858R

Specifications

2025-03-10



Contents

PXIe-7858R Specifications..... 3

PXIe-7858R Specifications

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- **Measured** specifications describe the measured performance of a representative model.

Specifications are **Typical** at 25 °C unless otherwise noted.

Pinout

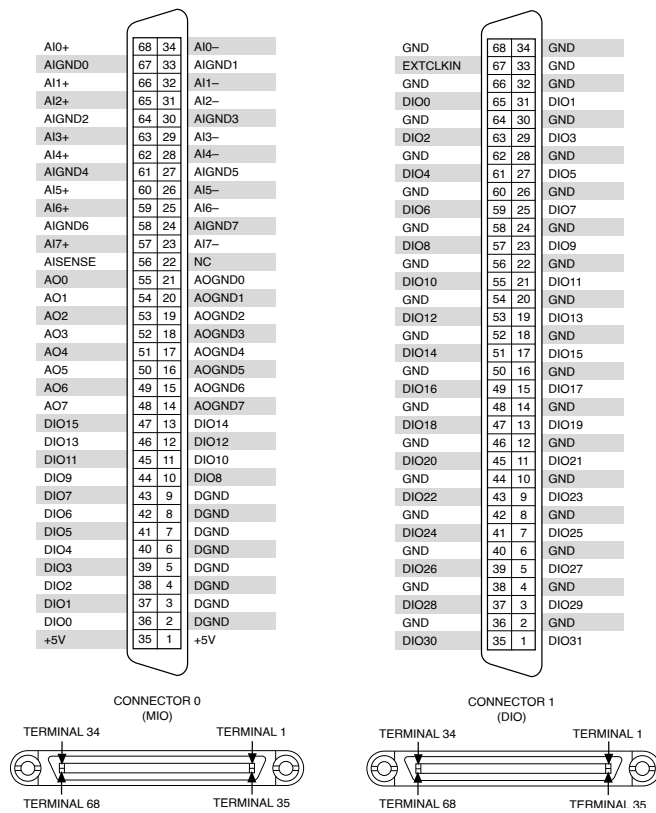


Table 1. PXIe-7858R Signal Descriptions

Signal	Description
AI+	Positive analog input signal connection
AI-	Negative analog input signal connection
AISENSE	Reference connection for NRSE measurements
AIGND	Ground reference for the analog input signal
AO	Analog output signal connection
AOGND	Ground reference for the analog output signal
DIO	Digital input/output signal connection
DGND	Ground reference for the digital signal
EXTCLKIN	External clock input source that can be used for source synchronous acquisitions. The provided clock source must be stable and glitch-free.
GND	Ground connection
Supply (+5 V _{out})	5 V power output connection for external devices

Signal	Description
NC	No connection

The PXIe-7858R is protected from overvoltage and overcurrent conditions.



Note Refer to the device specifications, available at ni.com/manuals for more information.

Analog Input

Number of channels	8
Input modes (software-selectable; selection applies to all channels)	DIFF, NRSE, RSE
Type of ADC	Successive approximation register (SAR)
Resolution	16 bits
Conversion time	1 μ s
Maximum sampling rate (per channel)	1 MS/s
Input impedance	
Powered on	1.25 G Ω 2 pF
Powered off/overload	4 k Ω minimum

Input signal range (software-selectable)	$\pm 1\text{ V}$, $\pm 2\text{ V}$, $\pm 5\text{ V}$, $\pm 10\text{ V}$
Input bias current	$\pm 5\text{ nA}$
Input offset current	$\pm 5\text{ nA}$
Input coupling	DC
Overvoltage protection	
Powered on	$\pm 42\text{ V}$ maximum
Powered off	$\pm 35\text{ V}$ maximum

Table 2. AI Operating Voltage Ranges Over Temperature

Range (V)	Measurement Voltage, AI+ to AI-			Maximum Working Voltage (Signal + Common Mode)
	Minimum (V) ¹	Typical (V)	Maximum (V)	
± 10	± 10.37	± 10.5	± 10.63	$\pm 12\text{ V}$ of ground
± 5	± 5.18	± 5.25	± 5.32	$\pm 10\text{ V}$ of ground
± 2	± 2.07	± 2.1	± 2.13	$\pm 8.5\text{ V}$ of ground
± 1	± 1.03	± 1.05	± 1.06	$\pm 8\text{ V}$ of ground

AI Absolute Accuracy

Absolute accuracy at full scale numbers is valid immediately following internal calibration and assumes the device is operating within 10 °C of the last external calibration. Accuracies listed are valid for up to one year from the device external

1. The minimum measurement voltage range is the largest voltage the NI PXIe-7858R is guaranteed to accurately measure.

calibration.

Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:

- TempChangeFromLastExternalCal = 10 °C
- TempChangeFromLastInternalCal = 1 °C
- number_of_readings = 10,000
- CoverageFactor = 3 σ

Table 3. AI Absolute Accuracy (Calibrated)

Specifications	Range			
	$\pm 10\text{ V}$	$\pm 5\text{ V}$	$\pm 2\text{ V}$	$\pm 1\text{ V}$
Residual Gain Error (ppm of Reading)	104.4	105.9	110.6	118.4
Gain Tempco (ppm/°C)	20	20	20	20
Reference Tempco (ppm/°C)	4	4	4	4
Residual Offset Error (ppm of Range)	16.4	16.4	16.4	16.4
Offset Tempco (ppm of Range/°C)	4.18	4.17	4.41	4.63
INL Error (ppm of range)	42.52	46.52	46.52	50.52
Random Noise, σ (μV_{rms})	263	156	90	74
Absolute Accuracy at Full Scale (μV)	2,283	1,170	479	252

Table 4. AI Absolute Accuracy (Uncalibrated)

Specifications	Range			
	$\pm 10\text{ V}$	$\pm 5\text{ V}$	$\pm 2\text{ V}$	$\pm 1\text{ V}$
Residual Gain Error (ppm of Reading)	2,921	3,021	3,021	3,021
Gain Tempco (ppm/°C)	20	20	20	20
Reference Tempco (ppm/°C)	4	4	4	4
Residual Offset Error (ppm of Range)	661	671	700	631
Offset Tempco (ppm of Range/°C)	4.18	4.17	4.41	4.63
INL Error (ppm of range)	42.52	46.52	46.52	50.52

Specifications	Range			
	±10 V	±5 V	±2 V	±1 V
Random Noise, σ (μV_{rms})	263	156	90	74
Absolute Accuracy at Full Scale (μV)	36,895	19,018	7,667	3,769

Calculating Absolute Accuracy

$$\text{AbsoluteAccuracy} = \text{Reading} \times (\text{GainError}) + \text{Range} \times (\text{OffsetError}) + \text{NoiseUncertainty}$$

$$\text{GainError} = \text{ResidualGainError} + \text{GainTempco} \times (\text{TempChangeFromLastInternalCal}) + \text{ReferenceTempco} \times (\text{TempChangeFromLastExternalCal})$$

$$\text{OffsetError} = \text{ResidualOffsetError} + \text{OffsetTempco} \times (\text{TempChangeFromLastInternalCal}) + \text{INL_Error}$$

$$\text{NoiseUncertainty} = \frac{\text{RandomNoise} \times \text{CoverageFactor}}{\sqrt{\text{number_of_readings}}}$$

Refer to the following equation for an example of calculating absolute accuracy for a 10 V reading.

Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:

- TempChangeFromLastExternalCal = 10 °C
- TempChangeFromLastInternalCal = 1 °C
- number_of_readings = 10,000
- CoverageFactor = 3 σ

$$\text{GainError} = 104.4 \text{ ppm} + 20 \text{ ppm} \times 1 + 4 \text{ ppm} \times 10$$

$$\text{GainError} = 164.4 \text{ ppm}$$

$$\text{OffsetError} = 16.4 \text{ ppm} + 4.18 \text{ ppm} \times 1 + 42.52 \text{ ppm}$$

$$\text{OffsetError} = 63.1 \text{ ppm}$$

$$\text{NoiseUncertainty} = \frac{263 \mu\text{V} \times 3}{\sqrt{10,000}}$$

$$\text{NoiseUncertainty} = 7.89 \mu\text{V}$$

$$\text{AbsoluteAccuracy} = 10 \text{ V} \times (\text{GainError}) + 10 \text{ V} \times (\text{OffsetError}) + \text{NoiseUncertainty}$$

$$\text{AbsoluteAccuracy} = 2,283 \mu\text{V}$$

DC Transfer Characteristics

INL	Refer to the AI Accuracy Table
-----	--------------------------------

DNL	± 0.4 LSB typical, ± 0.9 LSB maximum
No missing codes	16 bits guaranteed
CMRR, DC to 60 Hz	-100 dB

Dynamic Characteristics

Bandwidth	
Small signal	1 MHz
Large signal	500 kHz

Table 5. Settling Time

Range (V)	Step Size (V)	Accuracy		
		± 16 LSB	± 4 LSB	± 2 LSB
± 10	± 20.0	1.50 μ s	4.00 μ s	7.00 μ s
	± 2.0	0.50 μ s	0.50 μ s	1.00 μ s
	± 0.2	0.50 μ s	0.50 μ s	0.50 μ s
± 5	± 10	1.50 μ s	3.50 μ s	7.50 μ s
	± 1	0.50 μ s	0.50 μ s	1.00 μ s
	± 0.1	0.50 μ s	0.50 μ s	0.50 μ s
± 2	± 4	1.00 μ s	3.50 μ s	8.00 μ s
	± 0.4	0.50 μ s	0.50 μ s	1.00 μ s
	± 0.04	0.50 μ s	0.50 μ s	0.50 μ s
± 1	± 2	1.00 μ s	3.50 μ s	12.00 μ s

Range (V)	Step Size (V)	Accuracy		
		± 16 LSB	± 4 LSB	± 2 LSB
	± 0.2	0.50 μ s	0.50 μ s	2.00 μ s
	± 0.02	0.50 μ s	0.50 μ s	0.50 μ s

Crosstalk	-80 dB, DC to 100 kHz, at 50 Ω
-----------	---------------------------------------

Analog Output

Output type	Single-ended, voltage output
Number of channels	8
Resolution	16 bits
Update time	1 μ s
Maximum update rate	1 MS/s
Type of DAC	Enhanced R-2R
Range	± 10 V
Output coupling	DC

Output impedance	0.5 Ω
Current drive	± 2.5 mA
Protection	Short circuit to ground
Overvoltage protection	
Powered on	± 15 V maximum
Powered off	± 10 V maximum
Power-on state	User-configurable
Power-on glitch	1 V for 1 μ s

Table 6. AO Operating Voltage Ranges for Over Temperature

Range (V)	Measurement Voltage, AO+ to AO GND		
	Minimum (V) ²	Typical (V)	Maximum (V)
± 10	± 10.1	± 10.16	± 10.22

AO Absolute Accuracy

Absolute accuracy at full scale numbers is valid immediately following internal calibration and assumes the device is operating within 10 °C of the last external calibration. Accuracies listed are valid for up to one year from the device external calibration.

- The minimum measurement voltage range is the largest voltage the NI PXIe-7858R is guaranteed to accurately measure.

Absolute accuracy at full scale on the analog output channels is determined using the following assumptions:

- TempChangeFromLastExternalCal = 10 °C
- TempChangeFromLastInternalCal = 1 °C

Table 7. AO Absolute Accuracy (Calibrated)

Specifications	±10 V Range
Residual Gain Error (ppm of Reading)	87.3
Gain Tempco (ppm/°C)	12.6
Reference Tempco (ppm/°C)	4
Residual Offset Error (ppm of Range)	41.1
Offset Tempco (ppm of Range/°C)	7.8
INL Error (ppm of range)	61
Absolute Accuracy at Full Scale (μV)	2,498

Table 8. AO Absolute Accuracy (Uncalibrated)

Specifications	±10 V Range
Residual Gain Error (ppm of Reading)	2,968.6
Gain Tempco (ppm/°C)	12.6
Reference Tempco (ppm/°C)	4
Residual Offset Error (ppm of Range)	1,004.1
Offset Tempco (ppm of Range/°C)	7.8
INL Error (ppm of range)	61
Absolute Accuracy at Full Scale (μV)	40,941

Calculating Absolute Accuracy

$$\text{AbsoluteAccuracy} = \text{OutputValue} \times (\text{GainError}) + \text{Range} \times (\text{OffsetError})$$

$$\text{GainError} = \text{ResidualGainError} + \text{GainTempco} \times (\text{TempChangeFromLastInternalCal}) + \text{ReferenceTempco} \times (\text{TempChangeFromLastExternalCal})$$

$$\text{OffsetError} = \text{ResidualGainError} + \text{AOOffsetTempco} \times (\text{TempChangeFromLastInternalCal}) + \text{INL_Error}$$

Refer to the following equation for an example of calculating absolute accuracy for a 10 V reading.

Absolute accuracy at full scale on the analog output channels is determined using the following assumptions:

- TempChangeFromLastExternalCal = 10 °C
- TempChangeFromLastInternalCal = 1 °C

$$\text{GainError} = 87.3 \text{ ppm} + 12.6 \text{ ppm} \times 1 + 4 \text{ ppm} \times 10$$

$$\text{GainError} = 139.9 \text{ ppm}$$

$$\text{OffsetError} = 41.1 \text{ ppm} + 7.8 \text{ ppm} \times 1 + 61 \text{ ppm}$$

$$\text{OffsetError} = 109.9 \text{ ppm}$$

$$\text{AbsoluteAccuracy} = 10 \text{ V} \times (\text{GainError}) + 10 \text{ V} \times (\text{OffsetError})$$

$$\text{AbsoluteAccuracy} = 2,498 \text{ } \mu\text{V}$$

DC Transfer Characteristics

INL	Refer to the AO Accuracy Table
DNL	±0.5 LSB typical, ±1 LSB maximum
Monotonicity	16 bits, guaranteed

Dynamic Characteristics

Table 9. Settling Time

Step Size (V)	Accuracy		
	±16 LSB	±4 LSB	±2 LSB
±20.0	5.3 μs	6.5 μs	7.8 μs
±2.0	3.2 μs	3.9 μs	4.4 μs
±0.2	1.8 μs	2.8 μs	3.8 μs

Slew rate	10 V/ μ s
Noise	250 μ V RMS, DC to 1 MHz
Glitch energy at midscale transition	\pm 10 mV for 3 μ s

5V Output

Output voltage	4.75 V to 5.1 V
Output current	0.5 A maximum
Overvoltage protection	\pm 30 V
Overcurrent protection	650 mA

Digital I/O

Table 10. Channel Frequency

Connector	Number of Channels	Maximum Frequency
Connector 0	16	10 MHz
Connector 1	32	80 MHz

Compatibility	LVTTL, LVCMOS
---------------	---------------

Logic family	Software-selectable
Default software setting	3.3 V

Table 11. Digital Input Logic Levels

Logic Family	Input Low Voltage (V_{IL}) Maximum	Input High Voltage (V_{IH}) Minimum
1.2 V	0.42 V	0.84 V
1.5 V	0.51 V	1.01 V
1.8 V	0.61 V	1.21 V
2.5 V	0.70 V	1.60 V
3.3 V	0.80 V	2.00 V

Minimum input	-0.3 V
Maximum input	3.6 V
Input leakage current	$\pm 15 \mu\text{A}$ maximum
Input impedance	50 k Ω typical, pull-down

Table 12. Digital Output Logic Levels

Logic Family	Current	Output Low Voltage (V_{OL}) Maximum	Output High Voltage (V_{OH}) Minimum
1.2 V	100 μA	0.20 V	1.00 V
1.5 V	100 μA	0.20 V	1.25 V

Logic Family	Current	Output Low Voltage (V _{OL}) Maximum	Output High Voltage (V _{OH}) Minimum
1.8 V	100 μ A	0.20 V	1.54 V
2.5 V	100 μ A	0.20 V	2.22 V
3.3 V	100 μ A	0.20 V	3.00 V
	4 mA	0.40 V	2.40 V

Maximum DC output current per channel	
Source	4.0 mA
Sink	4.0 mA
Output impedance	50 Ω
Power-on state	Programmable, by line
Protection	± 20 V, single line ³
Digital I/O voltage selection	Programmable, per connector, and defined at compilation (not run-time configurable)
Direction control of digital I/O channels	Per channel

3. NI recommends minimizing long-term over/under-voltage exposure to the Digital I/O. Prolonged DC voltage stresses that violate the maximum and minimum digital input voltage ratings may reduce device longevity. Over/under-voltage stresses are considered prolonged if the cumulative time in the abnormal condition exceeds 1 year.

Minimum I/O pulse width	6.25 ns
Minimum sampling period	5 ns

External Clock

Direction	Input into device
Maximum input leakage	$\pm 15 \mu\text{A}$
Characteristic impedance	50 Ω
Power-on state	Tristated
Minimum input	-0.3 V
Maximum input	3.6 V
Logic level	Inherited from programmed digital voltage selection per connector
Maximum input frequency	80 MHz

Reconfigurable FPGA

FPGA type	Kintex-7 325T
-----------	---------------

Number of flip-flops	407,600
Number of LUTs	203,800
Embedded Block RAM	16,020 kbits
Number of DSP48 slices	840
Timebase	40 MHz, 80 MHz, 120 MHz, 160 MHz, or 200 MHz
Default timebase	40 MHz
Timebase reference source	Onboard clock, phase-locked to PXI Express 100 MHz (PXIe_CLK100)
Onboard clock timebase accuracy	±100 ppm, 250 ps peak-to-peak jitter
Data transfers	DMA, interrupts, programmed I/O

Onboard DRAM

Memory size	1 Bank; 512 MB
Maximum theoretical data rate	800 MB/s streaming

Synchronization Resources

Input/output source	PXI_Trig<0..7>
Input source	PXI_Star, PXIe_DStarA, PXIe_DStarB, PXI_Clk10, PXIe_Clk100, External Clock 1
Output source	PXIe_DStarC

Bus Interface

Form factor	x4 PXI Express, specification v1.0 compliant
Slot compatibility	x4, x8, and x16 PXI Express or PXI Express hybrid slots
Data transfers	DMA, interrupts, programmed I/O
Number of DMA channels	16

Power Requirements

Power requirements are dependent on the digital output loads and configuration of the LabVIEW FPGA VI used in your application.

+3.3 V	3 A
+12 V	2 A

Physical Characteristics



Note If you need to clean the device, wipe it with a dry, clean towel.

Dimensions	18.5 cm × 17.3 cm × 3.6 cm(7.3 in. × 6.8 in. × 1.4 in.)
Weight	170.7 g (6.02 oz)
I/O connectors	2 × 68-pin VHDCI

Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Indoor use only.

Operating temperature (IEC 60068-2-1, IEC 60068-2-2)	0 °C to 55 °C
Storage temperature (IEC 60068-2-1, IEC 60068-2-2)	-40 °C to 71 °C
Operating humidity (IEC 60068-2-56)	10% RH to 90% RH, noncondensing
Storage humidity (IEC 60068-2-56)	5% RH to 95% RH, noncondensing
Pollution Degree	2

Maximum altitude	2,000 m
------------------	---------

Shock and Vibration

Operational shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random vibration	
Operating	5 Hz to 500 Hz, 0.3 grms
Non-operating	.5 Hz to 500 Hz, 2.4 grms (Tested in accordance with IEC 60068-2-64. Meets MIL-PRF-28800F Class 3.)

Safety Voltages

Connect only voltages that are below these limits.

Channel-to-earth	±12 V, Measurement Category I
Channel-to-channel	±24 V, Measurement Category I



Caution Do not connect the NI PXle-7858R to signals or use for measurements within Measurement Categories II, III, or IV.



Attention Ne connectez pas le NI PXle-7858R à des signaux et ne l'utilisez pas pour effectuer des mesures dans les catégories de mesure II, III ou IV.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as **MAINS** voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)
- 2014/53/EU; Radio Equipment Directive (RED)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Product Certifications and Declarations


Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management


NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Calibration

Recommended warm-up time	15 minutes
--------------------------	------------

Calibration interval	1 year
Onboard calibration reference	
DC level ⁴	5.000 V (± 2 mV)
Temperature coefficient	± 4 ppm/ $^{\circ}$ C maximum
Long-term stability	± 25 ppm/1,000 h



Note Refer to Calibration Certifications at ni.com/calibration to generate a calibration certificate for the NI PXIe-7858R

NI Services

Visit ni.com/support to find support resources including documentation, downloads, and troubleshooting and application development self-help such as tutorials and examples.

Visit ni.com/services to learn about NI service offerings such as calibration options, repair, and replacement.

Visit ni.com/register to register your NI product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

NI corporate headquarters is located at 11500 N Mopac Expwy, Austin, TX, 78759-3504, USA.

4. Actual value stored in Flash memory