

---

# NI-5753

---

2025-03-14



# Contents

NI 5753 Specifications ..... 3

# NI 5753 Specifications

This document lists specifications for the NI 5753 adapter module. Pair these specifications with the specifications listed in your FlexRIO FPGA module specifications document or your Controller for FlexRIO specifications document.



**Caution** The protection provided by the NI 5753 can be impaired if it is used in a manner not described in this document.



**Caution** To avoid permanent damage to the NI 5753, disconnect all signals connected to the NI 5753 before powering down the module, and only connect signals after the module has been powered on by the FlexRIO FPGA module or the Controller for FlexRIO.



**Note** All numeric specifications are typical unless otherwise noted. All graphs illustrate the performance of a representative module.

Specifications are subject to change without notice. For the most recent device specifications, visit [ni.com/manuals](https://ni.com/manuals).

## FlexRIO Documentation

**Table 1.** FlexRIO Documentation Locations and Descriptions

Document	Location	Description
Getting started guide for your FlexRIO FPGA module or Controller for FlexRIO	Available from the Start menu and at <a href="https://ni.com/manuals">ni.com/manuals</a> .	Contains installation instructions for your FlexRIO system.
Specifications document for your FlexRIO FPGA module or Controller for FlexRIO	Available from the Start menu and at <a href="https://ni.com/manuals">ni.com/manuals</a> .	Contains specifications for your FlexRIO FPGA module or Controller for FlexRIO.
Getting started guide for your adapter module	Available from the Start menu and at <a href="https://ni.com/manuals">ni.com/manuals</a> .	Contains signal information, examples, and CLIP details for your adapter module.

Document	Location	Description
Specifications document for your adapter module	Available from the Start menu and at <a href="http://ni.com/manuals">ni.com/manuals</a> .	Contains specifications for your adapter module.
<b>LabVIEW FPGA Module Help</b>	Embedded in <b>LabVIEW Help</b> and at <a href="http://ni.com/manuals">ni.com/manuals</a> .	Contains information about the basic functionality of the LabVIEW FPGA Module.
<b>Real-Time Module Help</b>	Embedded in <b>LabVIEW Help</b> and at <a href="http://ni.com/manuals">ni.com/manuals</a> .	Contains information about real-time programming concepts, step-by-step instructions for using LabVIEW with the Real-Time Module, reference information about Real-Time Module VIs and functions, and information about LabVIEW features on real-time operating systems.
<b>FlexRIO Help</b>	Available from the Start menu and at <a href="http://ni.com/manuals">ni.com/manuals</a> .	Contains information about the FPGA module front panel connectors and I/O, controller for FlexRIO front panel connectors and I/O, programming instructions, and adapter module component-level IP (CLIP).
<b>FlexRIO Adapter Module Development Kit User Manual</b>	Available from the Start menu at <b>Start » All Programs » National Instruments » NI FlexRIO » NI FlexRIO Adapter Module Development Kit » Documentation</b> .	Contains information about how to create custom adapter modules for use with FlexRIO FPGA modules.
LabVIEW Examples	Available in NI Example Finder. In LabVIEW, click <b>Help » Find Examples » Hardware Input and Output » FlexRIO</b> .	Contains examples of how to run FPGA VIs and Host VIs on your device.
IPNet	Located at <a href="http://ni.com/ipnet">ni.com/ipnet</a> .	Contains LabVIEW FPGA functions and intellectual property to share.
FlexRIO product page	Located at <a href="http://ni.com/flexrio">ni.com/flexrio</a> .	Contains product information and data sheets for FlexRIO

Document	Location	Description
		devices.

## General Characteristics

<b>Number of channels</b>		
DC-coupled	12 analog input	
AC-coupled	16 analog input	
Input impedance		50 $\Omega$
Sample rate		120 MS/s
<b>Frequency range</b>		
DC-coupled	DC to 250 MHz	
AC-coupled	0.1 MHz to 250 MHz	
ADC type		AD9653 <sup>[1]</sup>

### Related information:

- <http://www.analog.com/en/index.html>

# Typical Specifications

## Analog Input Levels

ADC offset error (2 V <sub>pp</sub> input) <sup>[2]</sup>		-6 mV
Uncalibrated DC coupling offset error <sup>[3]</sup>		±10 mV
ADC gain error		-5% full scale
DC offset control (DC-coupled option)		
Range (at input)	-0.5 V to 0.5 V	
Resolution	500 μV/step	
Full-scale input (0 dBFS, 50 Ω, 20.1 MHz)		
AC-coupled build		
Number of channels	16	
Input voltage	1.8 V <sub>pp</sub>	
Input power	+9.1 dBm	
DC-coupled build		
Number of channels	12	

Input voltage	0.9 V <sub>pp</sub>
Input power	+3.2 dBm

## AC-Coupled Performance

Bandwidth	
-3 dB	1 MHz to 176 MHz
-1 dB	1 MHz to 85 MHz
SNR <sup>[4]</sup>	
20.17 MHz input	75.86 dBFS
70.17 MHz input	70.75 dBFS
124.17 MHz input	66.09 dBFS
SINAD <sup>[4]</sup>	
20.17 MHz input	75.8 dBFS
70.17 MHz input	70.56 dBFS
124.17 MHz input	65.95 dBFS
SFDR <sup>[4]</sup>	

20.17 MHz input	-94.03 dBc
70.17 MHz input	-84.84 dBc
124.17 MHz input	-79.52 dBc
<b>RX channel to RX channel isolation</b> <sup>[5]</sup>	
1 MHz	86 dB
50 MHz	77 dB
100 MHz	71 dB
150 MHz	68 dB
200 MHz	64 dB


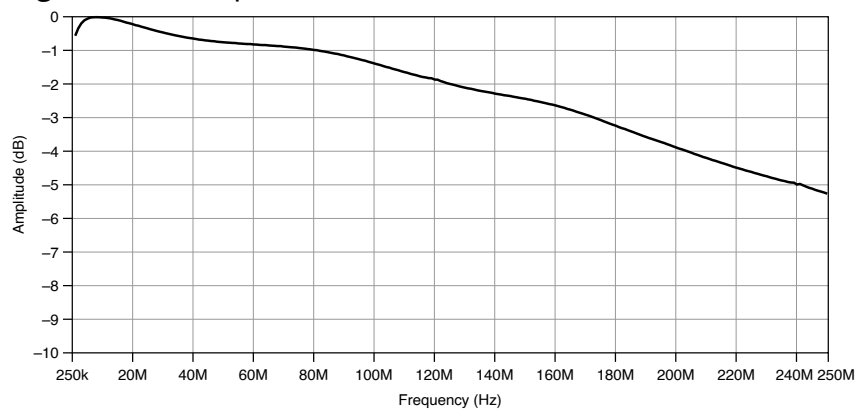
**Figure 1.** AC-Coupled Passband



Figure 2. Analog Input One-Tone Spectral Measurement (20.17 MHz, -1 dBFS)

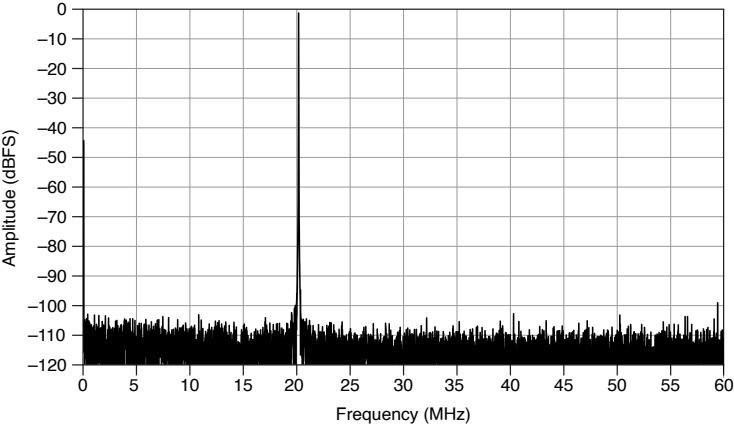

DC-Coupled Performance

Bandwidth	
-3 dB	1 MHz to 117 MHz
-1 dB	1 MHz to 64 MHz
SNR <sup>1</sup>	
20.17 MHz	69.82 dBFS
70.17 MHz	66.95 dBFS
124.17 MHz	63.27 dBFS
SINAD <sup>1</sup>	
20.17 MHz	69.66 dBFS
70.17 MHz	64.67 dBFS

124.17 MHz	54.64 dBFS
<b>SFDR</b> <sup>[1]</sup>	
20.17 MHz	85.66 dBc
70.17 MHz	69.19 dBc
122.17 MHz	56.38 dBc
<b>RX channel to RX channel isolation</b> <sup>[6]</sup>	
1 MHz	99 dB
50 MHz	78 dB
100 MHz	72 dB
150 MHz	68 dB
200 MHz	66 dB

Figure 3. DC-Coupled Passband


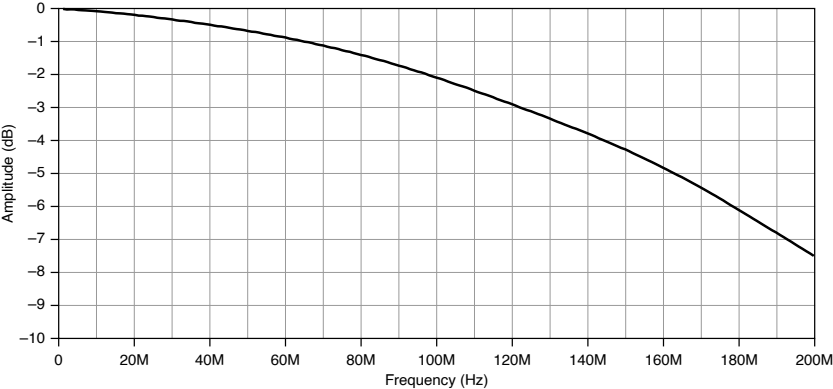


Figure 4. Analog Input One-Tone Spectral Measurement (20.17 MHz, -1 dBFS)

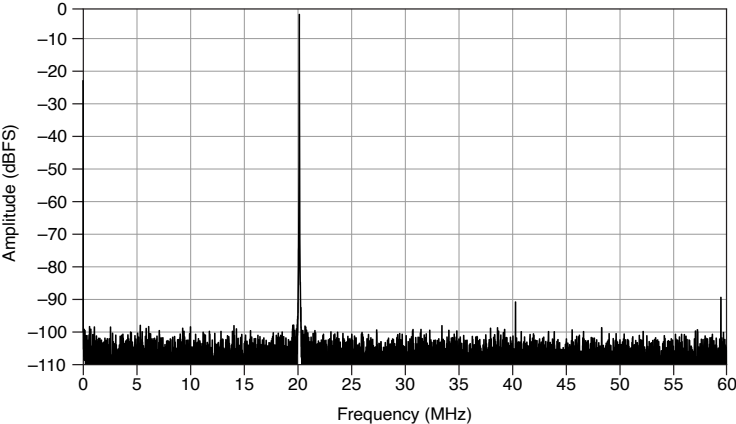

# DC Power Requirements

## Current Requirements

V <sub>EEPROM</sub>		2 mA
AC-coupled build		
V <sub>CCoA</sub>	<1 mA	
V <sub>CCoB</sub>	<1 mA	
P <sub>33V</sub>	870 mA	

P <sub>12V</sub>	211 mA
<b>DC-coupled build</b>	
V <sub>CCoA</sub>	<1 mA
V <sub>CCoB</sub>	<1 mA
P <sub>33V</sub>	866 mA
P <sub>12V</sub>	231 mA

## Voltage Requirements

V <sub>CCoA</sub> , V <sub>CCoB</sub>	2.50 V
V <sub>EEPROM</sub>	3.30 V
P <sub>33V</sub>	3.3 V
P <sub>12V</sub>	12 V

## CLK IN

The CLK IN connector provides access to the external Reference Clock and the external Sample Clock.

External Reference Clock (CLK IN)	
Input impedance	50 $\Omega$
Coupling	AC
Input voltage (50 $\Omega$ )	1.4 V <sub>pp</sub> to 4.4 V <sub>pp</sub>
Input power (50 $\Omega$ )	+7 dBm to +16.8 dBm
Frequency	10 MHz
External Sample Clock (CLK IN)	
Input impedance	50 $\Omega$
Coupling	AC
Input voltage (50 $\Omega$ )	1.4 V <sub>pp</sub> to 2.5 V <sub>pp</sub>
Input power (50 $\Omega$ )	+7 dBm to +12 dBm
Frequency	120 MHz

## Internal Clock

Internal Sample Clock
-----------------------

Frequency (default)	120 MHz
Reference spurs	60 dBc
<b>Phase Noise</b>	
10 kHz offset	-95 dBc/Hz
100 kHz offset	-115 dBc/Hz
<b>Internal Reference</b>	
Frequency (default)	10 MHz
Stability	±1.0 ppm
<b>Phase Noise</b>	
1 kHz offset	-137 dBc/Hz
10 kHz offset	-150 dBc/Hz
100 kHz offset	-155 dBc/Hz

## AUX I/O (Port 0 DIO <0..3>, Port 1 DIO <0..3>, and PFI <0..3>)

Number of channels	12 bidirectional (8 DIO and 4 PFI)
--------------------	------------------------------------

Connector type	HDMI
Interface standard	3.3 V LVCMOS
<b>Interface logic</b>	
Maximum $V_{IL}$	0.8 V
Minimum $V_{IH}$	2.0 V
Maximum $V_{OL}$	0.4 V
Minimum $V_{OH}$	2.7 V
Maximum $V_{OH}$	3.6 V
$Z_{out}$	50 $\Omega \pm 20\%$
$I_{out}$ (DC)	$\pm 2$ mA
Pull-down resistor	150 k $\Omega$
Recommended operating voltage	-0.3 V to 3.6 V
Overvoltage protection	$\pm 10$ V

Maximum toggle frequency	100 MHz
+5 V maximum power	10 mA
+5 V voltage tolerance	4.2 V to 5 V

## Power Draw

AC-coupled build	5.40 W
DC-coupled build	5.62 W

## Physical

Dimensions	11.7 x 2.00 x 10.2 cm (4.6 x 0.8 x 4.0 in.)
Weight	317.5 g (11.2 oz)
Front panel connectors	One ganged MCX connector, one SMB connector, and one HDMI connector

## Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
------------------	---------------------------------------------------



Pollution Degree	2
------------------	---

Indoor use only.

## Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

## Storage Environment

Ambient temperature range	-40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

## Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random vibration	

Operating	5 Hz to 500 Hz, 0.3 grms
Nonoperating	5 Hz to 500 Hz, 2.4 grms (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

## Compliance and Certifications

### Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

### Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended

for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

## Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit [ni.com/certification](https://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Minimize Our Environmental Impact*** web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国RoHS）



**中国客户** National Instruments符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于National Instruments中国RoHS合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)