
PXI-4110

Specifications

2025-03-14



Contents

PXI-4110 Specifications 3

PXI-4110 Specifications

These specifications apply to the PXI-4110 with APS-4100 Auxiliary Power Supply and the PXI-4110 without auxiliary power supply.

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Warranted** unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature^[1] of 23 °C ± 10 °C
- Calibration interval of 1 year
- 15 minutes warm-up time
- niDCPower Samples to Average property or
NIDCPOWER_ATTR_SAMPLES_TO_AVERAGE attribute set to 300 for optimal 50 Hz
and 60 Hz rejection

Cleaning Statement



Notice Clean the hardware with a soft, nonmetallic brush. Make sure that

the hardware is completely dry and free from contaminants before returning it to service.

Device Capabilities


The following table and figure illustrate the voltage and current source ranges of the PXI-4110.


Channel	DC voltage	Isolation ^[2]	DC current (power)			
			Auxiliary power		Internal power	
			20 mA range	1 A range	20 mA range	1 A range
0	0 V to +6 V	N/A	N/A	1 A (6 W)	N/A	1 A (6 W)
1	0 V to +20 V	60 VDC, CAT I	20 mA	1 A (20 W)	20 mA	100 mA (2 W) ^[3]
2	0 V to -20 V	60 VDC, CAT I	20 mA	1 A (20 W)	20 mA	100 mA (2 W) ^[3]



Note The PXI-4110 is a single-quadrant power supply with three output channels. In this document, channel 0 refers to the 0 V to +6 V output, channel 1 refers to the 0 V to +20 V output, and channel 2 refers to the 0 V to -20 V output.

Figure 1. Quadrant Diagrams

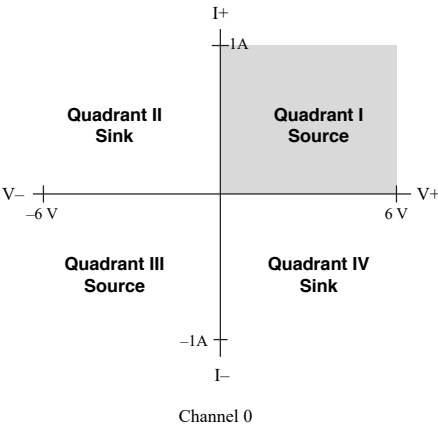

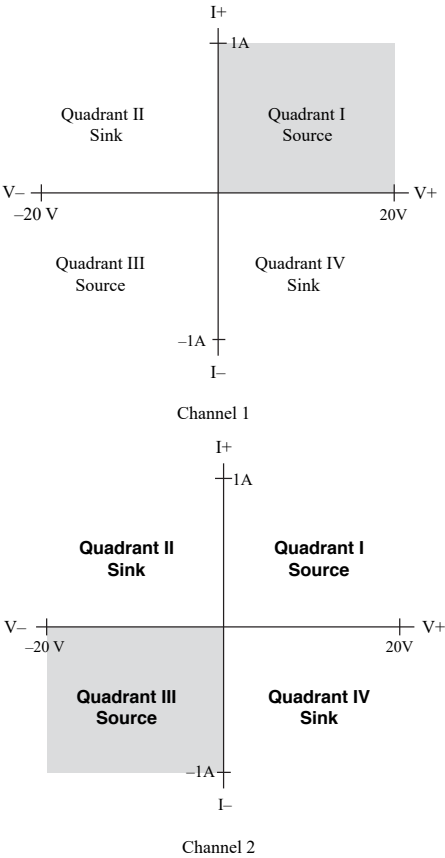

Voltage Programming Accuracy/Resolution

Table 1. Voltage Programming Accuracy/Resolution

Channel	Range	Resolution	Accuracy ± (% of voltage + offset)	
			1 year 23 °C ± 10 °C	Tempco/°C ^[4] 0 °C to 55 °C
0	+6 V	0.12 mV	0.05% + 4 mV	0.005% + 0.3 mV
1	+20 V	0.40 mV	0.05% + 10 mV	0.005% + 1 mV
2	-20 V	0.40 mV	0.05% + 10 mV	0.005% + 1 mV

Current Programming Accuracy/Resolution

Table 2. Current Programming Accuracy/Resolution ^[5]

Channel	Range ^[6]	Resolution	Accuracy \pm (% of current + offset)	
			1 year 23 °C \pm 10 °C	Tempco/°C ^[7] 0 °C to 55 °C
0	1 A	0.02 mA	0.15% + 4 mA	0.02% + 0.2 mA
1 and 2	20 mA	0.40 μ A	0.15% + 60 μ A	0.01% + 3 μ A
	1 A	0.02 mA	0.15% + 4 mA	0.02% + 0.2 mA

Related reference:

- [Accuracy Specification Derating versus Output Current](#)

Voltage Measurement Accuracy/Resolution

Table 3. Voltage Measurement Accuracy/Resolution ^[8]

Channel	Range	Resolution	Accuracy \pm (% of voltage + offset)	
			1 year 23 °C \pm 10 °C	Tempco/°C ^[9] 0 °C to 55 °C
0	+6 V	0.06 mV	0.05% + 4 mV	0.005% + 0.2 mV
1	+20 V	0.20 mV	0.05% + 5 mV	0.005% + 0.5 mV
2	-20 V	0.20 mV	0.05% + 5 mV	0.005% + 0.5 mV

Current Measurement Accuracy/Resolution

Table 4. Current Measurement Accuracy/Resolution ^[9]

Channel	Range	Resolution	Accuracy \pm (% of current + offset) ^[10]	
			1 year 23 °C \pm 10 °C	Tempco/°C ^[11] 0 °C to 55 °C
0	1 A	0.01 mA	0.15% + 4 mA	0.02% + 0.2 mA
1 and 2	20 mA	0.20 μ A	0.15% + 35 μ A	0.01% + 3 μ A

Channel	Range	Resolution	Accuracy \pm (% of current + offset) ^[10]	
			1 year 23 °C \pm 10 °C	Tempco/°C ^[11] 0 °C to 55 °C
	1 A	0.01 mA	0.15% + 4 mA	0.02% + 0.2 mA

Related reference:

- [Accuracy Specification Derating versus Output Current](#)

Voltage Output Speed, Typical

Table 5. Voltage Output Speed, ^[12] Typical

Channel	Auxiliary power				Internal power			
	Rise time ^[13]		Fall time ^[14]		Rise time ^[13]		Fall time ^[14]	
	Full load	No load	Full load	No load	Full load	No load	Full load	No load
0	<1 ms	<1 ms	<1 ms	<25 ms	same as auxiliary power			
1 and 2	<1 ms	<1 ms	<2 ms	<56 ms	<20 ms	<10 ms	<15 ms	<56 ms

Line and Load Regulation

Line Regulation ^[15] (per volt of change in auxiliary power input) \pm (% of output + offset)	
Voltage, channel 1 and 2	0.01 + 1 mV
Current, channel 1 and 2	0.01 + 0.02% of range
Load Regulation	
Voltage (% of voltage range, per amp of output load, measured at output channel terminals)	
Channel 0	0.42%

Channel 1 and 2	0.1%
Current (% of current range, per volt of output change)	
Channel 0	0.02%
Channel 1 and 2, 1 A range	0.007%
Channel 1 and 2, 20 mA range	0.003%

Ripple and Noise, Typical


Table 6. Ripple and Noise, Typical

Channel	RMS normal-mode voltage (20 Hz to 20 MHz)	RMS normal-mode current (20 mA into 500 Ω load) ^[16]
0	<1.5 mV	<8 μ A
1 and 2	<1 mV	<8 μ A (<3 μ A for 20 mA range)

Accuracy Specification Derating versus Output Current

The following figure illustrates accuracy specification derating as a function of output current for the PXI-4110.

Figure 2. Accuracy Specification Derating versus Output Current

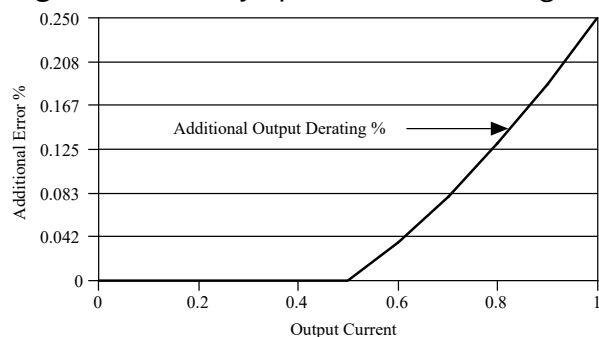

Transient Response

Transient response	Recovers to <0.1% of voltage range within 50 μ s after a change in load current from 50% to 100% of current range, typical.
--------------------	---

Measurement Timing Characteristics

Sample rate	
Default	300 S/s, nominal
Maximum	3,000 S/s, nominal

Absolute Maximum Limit

Maximum Voltage ^[17]	
Channel-to-COM	14 VDC over rated output, CAT I
Cascading multiple channels, channel-to-chassis ground	60 VDC max

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Caution Applying levels beyond the ratings specified in this section can result in permanent damage to the device.



Caution Connect only voltages that are within these limits.



Caution Do not connect to signals or use for the measurements within CAT II, III, or IV.



Note Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Protection

Output channel protection	
Overvoltage	Tolerates 14 VDC over rated output
Overcurrent or reverse voltage	Fused
Overtemperature	Automatic shutdown
Auxiliary power input protection	
Overvoltage	>15.5 VDC shut-off; >20 VDC crowbar (fused), typical
Overcurrent or reverse voltage	Fused

Isolation

Isolation voltage, channels 1- and 2-to-earth ground	60 VDC, CAT I, verified by dielectric withstand test, 5 s, continuous
--	---



Caution Do not connect to MAINs. Do not connect to signals or use for the measurements within CAT II, III, or IV.



Caution Take precautions to avoid electrical shock when operating this product at hazardous voltages.



Note Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINs building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Calibration Interval

Recommended calibration interval	1 year
----------------------------------	--------

Power Requirement Characteristics

PXI power requirement	10 W at 5 V, 1 W at 3.3 V, 6 W at 12 V, 3 W at -12 V, typical
Auxiliary power source (optional, channels 1 and 2 only) input requirements	11 VDC to 15.5 VDC, 5 A max, typical

Related information:


- [For information about cascading multiple NI PXI-4110 devices, refer to the NI DC Power Supplies and SMUs Help.](#)

Physical Characteristics

Dimensions	3U, one-slot, PXI/cPCI module; 2.0 cm × 13.0 cm × 21.6 cm(0.8 in. × 5.1 in. × 8.5 in.), nominal	
Weight	323 g (11.4 oz), typical	
User-replaceable fuses		
Output channels (internally socketed) ^[18]	3, Littelfuse 045301.5 (F 1.5 A 125 V), characteristic	
Auxiliary power input (front panel mount)	1, 5 x 20 mm glass fuse, Littelfuse 21806.3 (T 6.3 A L250 V), characteristic	



Note Fuses located on bottom of device underneath door. Use Phillips #1 screwdriver for removal.



Fuse When this fuse symbol is marked on a device, take proper precautions.

I/O connectors		
Output channels	MINI-COMBICON, 3.81 mm (6 position), nominal	
Auxiliary power input	MINI-COMBICON, 3.5 mm (2 position), nominal	



Note I/O connectors can accept wire gauges from 16 AWG to 28 AWG. NI recommends 18 AWG or lower.

Environment

Maximum altitude	2,000 m (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Storage Environment

Ambient temperature range	-40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Shock and Vibration

Operational shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)
-------------------	---

Random vibration	
Operating	5 Hz to 500 Hz, 0.31 grms (Tested in accordance with IEC 60068-2-64.)
Nonoperating	5 Hz to 500 Hz, 2.46 grms (Tested in accordance with IEC 60068-2-64. Test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications



Caution You can impair the protection provided by the PXI-4110 if you use it in a manner not described in this document.

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions

- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)
- 2014/53/EU; Radio Equipment Directive (RED)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.


Environmental Management

NI is committed to designing and manufacturing products in an environmentally


responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)