
NI-9224

Specifications

2025-03-10



Contents

NI-9224 Specifications	3
------------------------------	---

NI-9224 Specifications

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

Related information:

- [Software Support for CompactRIO, CompactDAQ, Single-Board RIO, R Series, and EtherCAT](#)

Conditions

Specifications are valid for the range -40 °C to 70 °C unless otherwise noted. All voltages are relative to the AI- signal on each channel unless otherwise noted.



Caution Do not operate the NI-9224 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.

NI-9224 Pinout

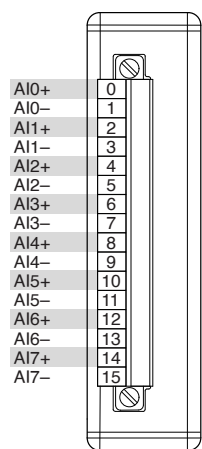


Table 1. Signal Descriptions

Signal	Description
AI+	Positive analog input signal connection
AI-	Negative analog input signal connection

Input Characteristics

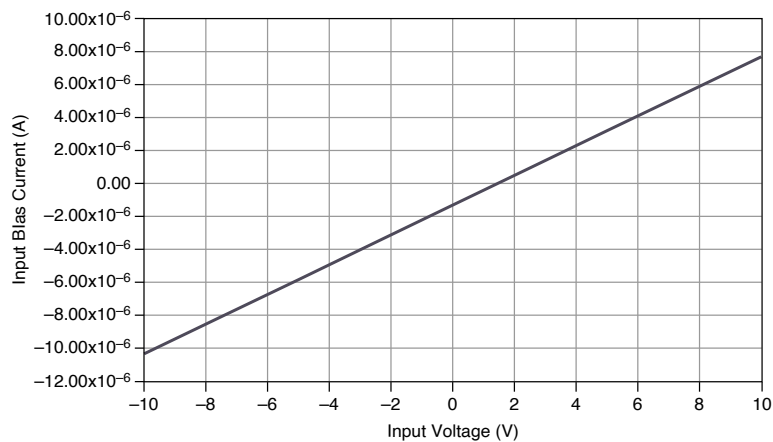
Number of channels	8 analog input channels
ADC resolution	24 bits
Type of ADC	Delta-Sigma
Sampling mode	Simultaneous

Table 2. Conversion time (simultaneously sampled)

Timing Mode	Conversion Time (ms)	Sample Rate (S/s)
High resolution	500	2
Medium resolution	83.3	12

Timing Mode	Conversion Time (ms)	Sample Rate (S/s)
Medium speed	10	100
High speed	1	1000

Input voltage ranges, AI+ to AI-		
Typical	± 10.54 V	
Minimum	± 10.40 V	
Overvoltage protection, AI+ to AI-	250 Vrms	
Input coupling	DC	


Figure 1. Input Bias Current**Table 3. NI-9224 Accuracy**

Measurement Conditions		Percent of Reading (Gain Error)	Percent of Range ¹ (Offset Error)
Calibrated	Typical (25 °C, ± 5 °C)	$\pm 0.11\%$	$\pm 0.01\%$
	Maximum (-40 °C to 70 °C)	$\pm 0.40\%$	$\pm 0.06\%$

1. Range equals 10.54 V


Input noise		
High resolution		5 μVrms
Medium resolution		7 μVrms
Medium speed		14 μVrms
High speed		51 μVrms
Stability		
Gain drift	$\pm 17 \text{ ppm}/^\circ\text{C}$	
Offset drift	$\pm 21 \mu\text{V}/^\circ\text{C}$	
Post-calibration gain match ($f_{\text{in}} = 100 \text{ Hz}$)		$\pm 75 \text{ mdB}$ maximum
Phase mismatch, channel-to-channel ($f_{\text{in}} = 100 \text{ Hz}$)		$\pm 0.002 ^\circ/\text{Hz}$ maximum
Input delay		
High resolution		199.290 ms
Medium resolution		41.619 ms
Medium speed		3.969 ms

High speed	0.323 ms
------------	----------

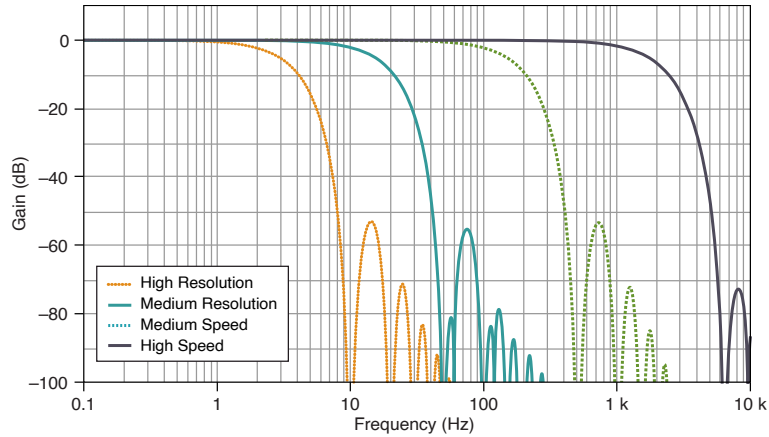Figure 1. Filter Frequency Response

Signal input bandwidth, -3 dB	
High resolution	2.2 Hz
Medium resolution	11.8 Hz
Medium speed	115.3 Hz
High speed	1.3 kHz
Common-Mode Rejection Ratio (CMRR), rejection of channel-to-earth common-mode voltages	
High resolution ($f_{in} = 50/60$ Hz)	160 dB
Medium resolution ($f_{in} = 50/60$ Hz)	160 dB
Medium speed ($f_{in} = 50/60$ Hz)	138 dB

High speed	Refer to the following figure
------------	-------------------------------

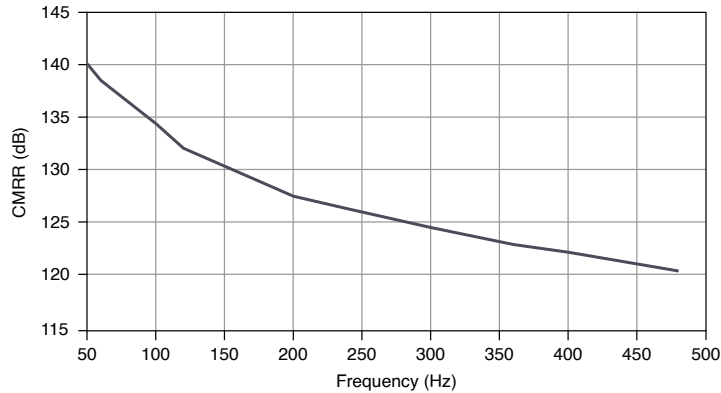Figure 1. High speed CMRR (0 Hz to 500 Hz)

Normal-Mode Rejection Ratio (NMRR)	
High resolution ($f_{in} = 50 \text{ Hz} \pm 1 \text{ Hz}$ or $60 \text{ Hz} \pm 1 \text{ Hz}$)	120 dB minimum
Medium resolution ($f_{in} = 50 \text{ Hz} \pm 1 \text{ Hz}$ or $60 \text{ Hz} \pm 1 \text{ Hz}$)	80 dB minimum
Crosstalk ($f_{in} = 1 \text{ kHz}$)	-125 dB
Alias hole rejection ($f_{in} = 614.4 \text{ kHz}$)	86 dB

Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-channel isolation
Up to 2,000 m altitude

Continuous	250 V RMS, Measurement Category II	
Withstand	1,500 V RMS, verified by a 5 s dielectric test	
Up to 5,000 m altitude		
Continuous	60 V DC, Measurement Category I	
Withstand	1,000 V RMS, verified by a 5 s dielectric test	
Division 2 and Zone 2 hazardous locations applications		60 V DC, Measurement Category I
Channel-to-earth ground isolation		
Up to 2,000 m altitude		
Continuous	250 V RMS, Measurement Category II	
Withstand	3,000 V RMS, verified by a 5 s dielectric test	
Up to 5,000 m altitude		
Continuous	60 V DC, Measurement Category I	
Withstand	1,000 V RMS , verified by a 5 s dielectric test	
Division 2 and Zone 2 hazardous locations applications		60 V DC, Measurement Category I

Measurement Categories

Measurement Category I



Warning Do not connect the product to signals or use for measurements within Measurement Categories II, III, or IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category II, III, or IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation. The product can only withstand transients up to the transient overvoltage rating without breakdown or damage to the insulation. An analysis of the working voltages, loop impedances, temporary overvoltages, and transient overvoltages in the system must be conducted prior to making measurements.



Mise en garde Ne pas connecter le produit à des signaux dans les catégories de mesure II, III ou IV et ne pas l'utiliser pour des mesures dans ces catégories, ou des mesures sur secteur ou sur des circuits dérivés de surtensions de catégorie II, III ou IV pouvant présenter des surtensions transitoires supérieures à ce que le produit peut supporter. Le produit ne doit pas être raccordé à des circuits ayant une tension maximale supérieure à la tension de fonctionnement continu, par rapport à la terre ou à d'autres voies, sous peine d'endommager et de compromettre l'isolation. Le produit peut tomber en panne et son isolation risque d'être endommagée si les tensions transitoires dépassent la surtension transitoire nominale. Une analyse des tensions de fonctionnement, des impédances de boucle, des surtensions temporaires et des surtensions transitoires dans le système doit être effectuée avant de procéder à des mesures.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as **MAINS** voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Measurement Category II



Caution If using in explosive atmospheres, do not connect the NI-9224 to signals or use for measurements within Measurement Categories II, III, or IV.



Attention S'il est utilisé dans des atmosphères explosibles, ne pas connecter le NI-9228 à des signaux ou l'utiliser pour effectuer des mesures dans les catégories de mesure II, III ou IV.



Caution Do not connect the product to signals or use for measurements within Measurement Categories III or IV.



Attention Ne pas connecter le produit à des signaux dans les catégories de mesure III ou IV et ne pas l'utiliser pour effectuer des mesures dans ces catégories.

Measurement Category II is for measurements performed on circuits directly connected to the electrical distribution system. This category refers to local-level electrical distribution, such as that provided by a standard wall outlet, for example, 115 V for U.S. or 230 V for Europe.

Environmental Characteristics

Temperature	
Operating	-40 °C to 70 °C
Storage	-40 °C to 85 °C

Humidity		
Operating	10% RH to 90% RH, noncondensing	
Storage	5% RH to 95% RH, noncondensing	
Ingress protection		IP40
Pollution Degree		2
Maximum altitude		5,000 m
Shock and Vibration		
Operating vibration		
Random	5 g RMS, 10 Hz to 500 Hz	
Sinusoidal	5 g, 10 Hz to 500 Hz	
Operating shock	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations	

To meet these shock and vibration specifications, you must panel mount the system.

Power Requirements

Power consumption from chassis	
Active mode	930 mW maximum

Sleep mode	53 μ W maximum
Thermal dissipation	
Active mode	1.43 W maximum
Sleep mode	53 μ W maximum

Physical Characteristics

If you need to clean the module, wipe it with a dry towel.

Dimensions	Visit ni.com/dimensions and search by module number.
Screw-terminal wiring	
Gauge	0.05 mm ² to 1.5 mm ² (30 AWG to 14 AWG) copper conductor wire
Wire strip length	6 mm (0.24 in.) of insulation stripped from the end
Temperature rating	90 °C, minimum
Torque for screw terminals	0.22 N · m to 0.25 N · m (1.95 lb · in. to 2.21 lb · in.)
Wires per screw terminal	One wire per screw terminal; two wires per screw terminal using a 2-wire ferrule

Ferrules	0.25 mm ² to 1.5 mm ²	
Connector securement		
Securement type		Screw flanges provided
Torque for screw flanges		0.2 N · m (1.80 lb · in.)
Weight	152 g (5.36 oz)	

Calibration

You can obtain the calibration certificate and information about calibration services for the NI-9224 at ni.com/calibration.

Calibration interval	2 years
----------------------	---------