

---

# SLSC-12251

# Specifications

---

2025-03-10



# Contents

SLSC-12251 Specifications ..... 3

# SLSC-12251 Specifications

## Definitions

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. Warranted specifications account for measurement uncertainties, temperature drift, and aging. Warranted specifications are ensured by design or verified during production and calibration.

**Characteristics** describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Typical-95** specifications describe the performance met by 95% ( $\approx 2\sigma$ ) of models with a 95% confidence.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- **Measured** specifications describe the measured performance of a representative model.

Specifications are **Warranted** unless otherwise noted.

Specifications are **Characteristic** unless otherwise noted.

Specifications are **Typical** unless otherwise noted.

Specifications are **Nominal** unless otherwise noted.


Specifications are **Measured** unless otherwise noted.

## Design Standards and Compatibility

|                                                                                           |                  |
|-------------------------------------------------------------------------------------------|------------------|
| <b><i>Switch Load and Signal Conditioning Module Design Specifications</i></b><br>version | 1.2              |
| SLSC compliance level                                                                     | 2                |
| Rear I/O compatibility category                                                           | None<br>(custom) |
| Required RTI                                                                              | RTI-12306        |
| Earliest driver version                                                                   | NI-SLSC 18.5     |

# SLSC-12251 Pinouts

Figure 1. SLSC-12251 Pinout

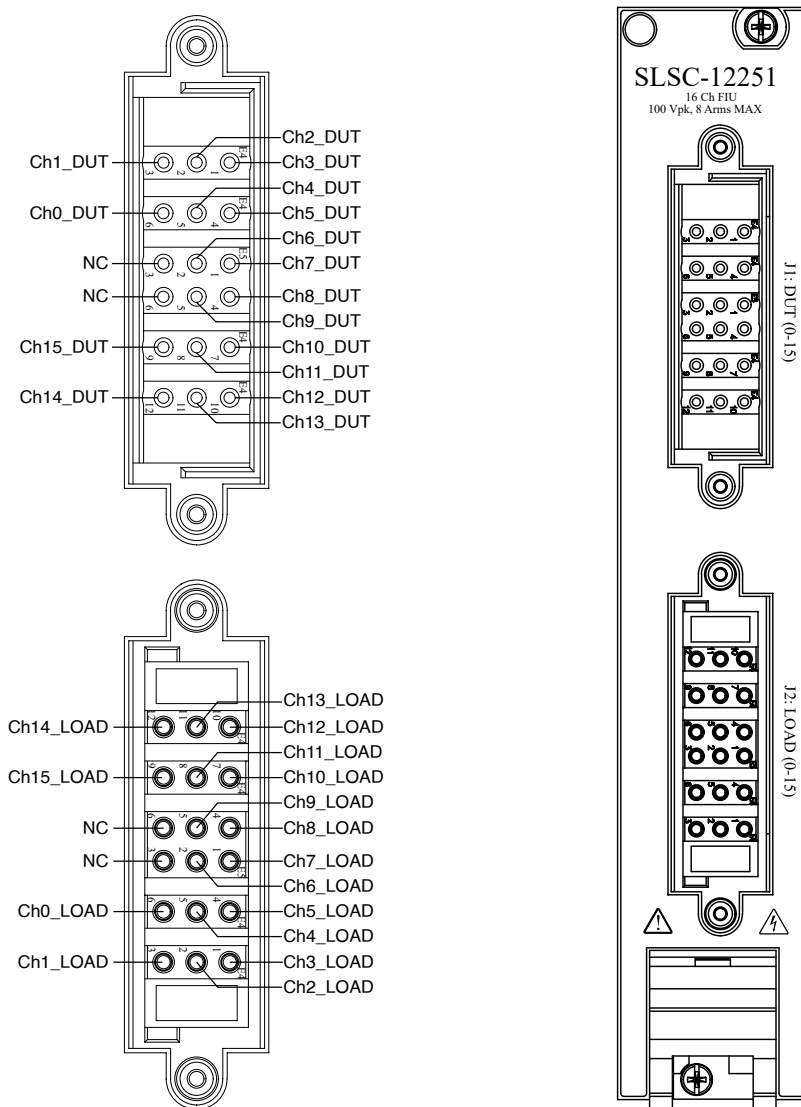

**Note** The input to each channel is Chx\_DUT. The output to each channel is Chx\_LOAD. NC indicates not connected and should not be used.

## Input Characteristics

All input characteristics are DC, AC RMS, or a combination unless otherwise specified.

|                                          |            |
|------------------------------------------|------------|
| Maximum switching voltage (any polarity) | 100 V peak |
|------------------------------------------|------------|



**Notice** Steady state voltages applied to the SLSC-12251 between any two I/O connector pins in excess of the maximum switching voltage specification may damage the module.



**Note** Signal connections through the SLSC-12251 are intended to go through the DUTn pin connections. Signal paths that do not use the DUTn pin connections bypass the internal overcurrent limiting features and may exceed the module's thermal capabilities. For more information, refer to the ***SLSC-12251 and SLSC-12252 User Guide.***

| Maximum continuous current                    |                     |
|-----------------------------------------------|---------------------|
| Each channel                                  | 8 A <sub>rms</sub>  |
| Sum of all channels                           | 56 A <sub>rms</sub> |
| Each BusA, BusB                               | 16 A <sub>rms</sub> |
| Maximum channel pulsed current (<1 ms, 25 °C) | 200 A peak          |



**Notice** Exceeding the maximum pulsed current can damage the module.

|                                                    |    |
|----------------------------------------------------|----|
| Number of bidirectional channels                   | 16 |
| Channel resistance (at 25 °C ambient) <sup>1</sup> |    |

1. Resistance generally increases with higher-numbered channels since the path is longer. Nominal

|                                                              |                 |
|--------------------------------------------------------------|-----------------|
| DUTn to LOADn                                                | 8 mΩ to 13 mΩ   |
| DUTn to BusA or BusB                                         | 9.5 mΩ to 11 mΩ |
| DUTn to DUTn+1 (n = even)                                    | 15 mΩ to 21 mΩ  |
| <b>Channel resistance (maximum)</b>                          |                 |
| DUTn to LOADn                                                | 20 mΩ           |
| DUTn to BusA or BusB                                         | 16 mΩ           |
| DUTn to DUTn+1 (n = even)                                    | 29 mΩ           |
| <b>Channel resistance temperature coefficients (nominal)</b> |                 |
| DUTn to LOADn, BusA, or BusB                                 | 0.042 mΩ/°C     |
| DUTn to DUTn+1 (n = even)                                    | 0.104 mΩ/°C     |

| <b>Leakage Current, Open Switches (μA)</b> | <b>25 °C</b> | <b>50 °C</b> | <b>85 °C</b> |
|--------------------------------------------|--------------|--------------|--------------|
| LOADn                                      | 0.3          | 1.4          | 5.8          |
| BusA or BusB                               | 3.1          | 7.7          | 8.9          |
| DUTn to DUTn+1 (n = even)                  | 0.1          | 0.6          | 3.7          |

|                                 |          |
|---------------------------------|----------|
| Channel Bandwidth (50 Ω system) | >750 kHz |
|---------------------------------|----------|

conditions were a digital temperature sensor reading of 42 °C to 45 °C with 25 °C ambient temperature. Maximums given are manufacturing test limits at 25 °C ambient.

|                                                      |                                          |         |                              |
|------------------------------------------------------|------------------------------------------|---------|------------------------------|
| Overcurrent fault setpoints                          | DUT high current limit                   |         | 29 A ± 8%                    |
|                                                      | DUT high current limit delay time        |         | 1 ms                         |
|                                                      | DUT low current limit                    |         | 10 A ± 5%                    |
|                                                      | DUT low current limit delay time         |         | 1 s                          |
|                                                      | Bus high current limit                   |         | 29 A ± 8%                    |
|                                                      | Bus high current limit delay time        |         | 1 ms                         |
| Overtemperature fault setpoints                      | High temperature digital setpoint        |         | >125 °C for a minimum of 1 s |
|                                                      | High temperature analog transition range |         | 115 °C to 138 °C             |
| Current measurement accuracy (0 °C to 40 °C ambient) | Full range                               |         | ± 25 A ± 3%                  |
|                                                      | ± 8 A Subrange after calibration         | Typical | ± 1.11% of reading ± 22 mA   |
|                                                      |                                          | Maximum | ± 1.79% of reading ± 50 mA   |
| Current measurement bandwidth                        |                                          |         | 100 kHz                      |
| Current measurement voltage output                   | (+) Terminal, ± full scale output        |         | ±2 V centered at Vcm         |
|                                                      | (-) Terminal = Vcm                       |         | 2.5 V                        |

## Switch Characteristics

|                                        |             |
|----------------------------------------|-------------|
| FET used for LOAD and Bus connections  | IPT015N10N5 |
| Avalanche energy, single pulse (85 °C) | 300 mJ      |
| FET used for (n, n+1) shorting pairs   | IPT059N15N3 |
| Avalanche energy, single pulse (85 °C) | 175 mJ      |



|                                               |                                                  |
|-----------------------------------------------|--------------------------------------------------|
| Switch type                                   | Dual FET                                         |
| Typical switch life                           | Unlimited, when operated within specified limits |
| Maximum switching rate (software dependent)   | 30 Hz                                            |
| Power-on or reset configuration               | All switches open                                |
| <b>Switch transition time</b>                 |                                                  |
| Open                                          | 5.0 $\mu$ s                                      |
| Close                                         | 3.6 $\mu$ s                                      |
| <b>Switch transition sequence<sup>2</sup></b> |                                                  |
| t = 0.12 ms                                   | Connect LOADs to DUTs                            |
| t = 0.32 ms                                   | Disconnect DUTs from BusA/B and pair channels    |
| t = 0.52 ms                                   | Connect DUTs to BusA/B and pair channels         |
| t = 0.72 ms                                   | Disconnect LOADs from DUTs                       |



**Note** Timing jitter is nominally 0.01 ms.

2. Start sequence upon execution of NI.FIU.Update command.

## Digital Temperature Sensor Characteristics

|                                       |             |
|---------------------------------------|-------------|
| Sensor used                           | LM95071CIMF |
| Datasheet accuracy (-40 °C to 150 °C) | ± 2 °C      |



**Note** The digital temperature sensor is not calibrated by NI.

## Calibration

|                          |         |
|--------------------------|---------|
| Recommended warm-up time | 1 hour  |
| Calibration interval     | 2 years |

## Power Requirements

|                                  |       |
|----------------------------------|-------|
| Power consumption from backplane | 21 W  |
| Thermal dissipation              | <50 W |

## Physical Characteristics

|            |                                                           |
|------------|-----------------------------------------------------------|
| SLSC slots | 1                                                         |
| Dimensions | 175 mm × 31 mm × 336 mm (6.89 in. × 1.19 in. × 13.21 in.) |

|                                      |                                                         |
|--------------------------------------|---------------------------------------------------------|
| Weight                               | 1,050 g (37.0 oz)                                       |
| <b>Front I/O connectors</b>          |                                                         |
| DUT                                  | 1x male 18-pin Positronic Scorpion                      |
| LOAD                                 | 1x female 18-pin Positronic Scorpion                    |
| Rear I/O connectors to the RTI-12306 | 1x 40-pin Hard Metric type B8, 2x Radsok Socket 3 mm ST |

## Environmental Characteristics

### Temperature and Humidity

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Operating temperature             | 0 °C to 40 °C <sup>3</sup>            |
| Storage temperature range         | -40 °C to 85 °C                       |
| Operating relative humidity range | 10% to 90%, noncondensing             |
| Storage relative humidity range   | 5% to 95%, noncondensing              |
| Pollution Degree                  | 2                                     |
| Maximum altitude                  | 2,000 m (800 mbar) (at 25 °C ambient) |

3. The chassis internal ambient temperature may reach 85 °C with all slots at the maximum allowed power dissipation. In the SLSC-12001 chassis this corresponds to an external ambient of 40 °C.

## Shock and Vibration

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Operating shock                 | 30 g peak, half-sine, 11 ms pulse |
| Operating vibration, random     | 5 Hz to 500 Hz, 0.3 g RMS         |
| Non-operating vibration, random | 5 Hz to 500 Hz, 2.4 g RMS         |

## Accessories

Visit [ni.com](http://ni.com) for more information about SLSC-12251 accessories.

You must install mating connectors according to local safety codes and standards and according to the specifications provided by the manufacturer. You are responsible for verifying the safety compliance of third-party connectors and their usage according to the relevant standard(s), including UL and CSA in North America and IEC and VDE in Europe.

## Safety



**Caution** Observe all instructions and cautions in the user documentation. Using the product in a manner not specified can damage the product and compromise the built-in safety protection. Return damaged products to NI for repair.



**Attention** Suivez toutes les instructions et respectez toutes les mises en garde de la documentation d'utilisation. L'utilisation du produit de toute autre façon que celle spécifiée risque de l'endommager et de compromettre la protection de sécurité intégrée. Renvoyez les produits endommagés à NI pour réparation.

## Safety Voltages

Connect only voltages that are below these limits.

| Channel-to-channel isolation            |            |
|-----------------------------------------|------------|
| Continuous working voltage <sup>4</sup> | 100 V peak |
| Channel-to-earth isolation              |            |
| Continuous working voltage              | 100 V peak |
| Transient overvoltage <sup>5</sup>      | 920 V peak |



**Caution** If you are using the SLSC-12251 with voltages greater than 60 V DC, the SLSC chassis must be made touch safe by panel mounting it in a closed rack to prevent user access to the rear of the device.



**Attention** Si vous utilisez le SLSC-12251 avec des tensions supérieures à 60 V DC, le châssis SLSC doit être sécurisé contre les contacts. Pour cela, il est nécessaire de le monter sur panneau dans un rack fermé pour empêcher l'utilisateur d'accéder à l'arrière de l'appareil.

These test and measurement circuits are rated for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS.

MAINS is a hazardous live electrical supply system to which equipment is designed to be connected to for the purpose of powering equipment. This product is rated for measurements of voltages from specially protected secondary circuits. Such voltage

4. Working voltage rating is the highest RMS value of the AC or DC voltage across the insulation that can continuously occur when the equipment is supplied at rated voltage.
5. The short duration overvoltage of a few milliseconds or less, oscillatory or non-oscillatory, usually highly damped.

measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

## Safety Guidelines for Hazardous Voltages



**Caution** Ensure that hazardous voltage wiring is performed only by qualified personnel adhering to local electrical standards.



**Attention** S'assurer que le câblage à tension dangereuse est effectué par du personnel qualifié respectant les normes électriques locales.



**Caution** Do not mix hazardous voltage circuits and human-accessible circuits on the same module.



**Attention** Ne pas combiner des circuits de tension dangereuse et des circuits accessibles aux personnes sur le même module.



**Caution** When device terminals are hazardous voltage LIVE, you must ensure that devices and circuits connected to the device are properly insulated from human contact.



**Attention** Lorsqu'une haute tension dangereuse est appliquée aux bornes de l'appareil, s'assurer que les appareils et les circuits auxquels il est connecté sont correctement isolés de tout contact humain.



**Caution** All wiring must be insulated for the highest voltage used.



**Attention** Tout le câblage doit être isolé pour la plus haute tension utilisée.



**Warning** Do not connect the SLSC-12251 to signals or use for measurements within Measurement Categories II, III, or IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category II, III, or IV which may have transient overvoltages above what the

product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation. The product can only withstand transients up to the transient overvoltage rating without breakdown or damage to the insulation. An analysis of the working voltages, loop impedances, temporary overvoltages, and transient overvoltages in the system must be conducted prior to making measurements.



**Mise en garde** Ne connectez pas le SLSC-12251 à des signaux dans les catégories de mesure II, III ou IV et ne l'utilisez pas pour des mesures dans ces catégories, ou des mesures sur secteur ou sur des circuits dérivés de surtensions de catégorie II, III ou IV pouvant présenter des surtensions transitoires supérieures à ce que le produit peut supporter. Le produit ne doit pas être raccordé à des circuits ayant une tension maximale supérieure à la tension de fonctionnement continu, par rapport à la terre ou à d'autres voies, sous risque d'endommager et de compromettre l'isolation. Le produit risque de tomber en panne et son isolation risque d'être endommagée si les tensions transitoires dépassent la surtension transitoire nominale. Une analyse des tensions de fonctionnement, des impédances de boucle, des surtensions temporaires et des surtensions transitoires dans le système doit être effectuée avant de procéder à des mesures.

## Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

## Electromagnetic Compatibility Standards

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** In Europe, Australia, and New Zealand (per CISPR 11) Class A equipment is intended for use in non-residential locations.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)

## Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](https://ni.com/product-certifications), search by model number, and click the appropriate link.

## Environmental Guidelines



**Notice** This model is intended for use in indoor applications only.





**Notice** To meet the shock and vibration specifications in this document, you must panel mount the system.

## Environmental Standards

This product meets the requirements of the following environmental standards for electrical equipment.

- IEC 60068-2-1 Cold
- IEC 60068-2-2 Dry heat
- IEC 60068-2-78 Damp heat (steady state)
- IEC 60068-2-64 Random operating vibration
- IEC 60068-2-27 Operating shock




**Note** To verify marine approval certification for a product, refer to the product label or visit [ni.com/certification](https://ni.com/certification) and search for the certificate.

### Environmental Management


NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

### EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**— NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。 (For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)