

---

# USB-6216

# Specifications

---

2025-03-13



# Contents

USB-6216 Specifications ..... 3

# USB-6216 Specifications

These specifications apply to the USB-6216 BNC, USB-6216 Mass Termination, and USB-6216 Spring Terminal.

## Definitions

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

**Characteristics** describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

## Conditions

Specifications are valid at 25 °C unless otherwise noted.

## Analog Input

Number of channels	8 differential or 16 single ended
ADC resolution	16 bits
DNL	No missing codes guaranteed

INL		Refer to the <a href="#">AI Absolute Accuracy</a> section
Sample rate		
Single channel maximum		400 kS/s
Multichannel maximum (aggregate)		400 kS/s
Minimum		0 S/s
Timing resolution	50 ns	
Timing accuracy	50 ppm of sample rate	
Input coupling	DC	
Input range	±0.2 V, ±1 V, ±5 V, ±10 V	
Maximum working voltage for analog inputs (signal + common mode)	±10.4 V of AI GND	
CMRR (DC to 60 Hz)	100 dB	
Input impedance		
Device on		
AI+ to AI GND	>10 GΩ in parallel with 100 pF	

AI- to AI GND	>10 GΩ in parallel with 100 pF	
Device off		
AI+ to AI GND	1,200 Ω	
AI- to AI GND	1,200 Ω	
Input bias current	±100 pA	
Crosstalk (at 100 kHz)		
Adjacent channels	-75 dB	
Non-adjacent channels	-90 dB	
Small signal bandwidth (-3 dB)	1.5 MHz	
Input FIFO size	4,095 samples	
Scan list memory	4,095 entries	
Data transfers	USB Signal Stream, programmed I/O	
Overvoltage protection for all analog input and sense channels		
Device on	±30 V for up to two AI pins	


Device off	±20 V for up to two AI pins
Input current during overvoltage condition	±20 mA maximum/AI pin


Settling Time for Multichannel Measurements

Accuracy, full-scale step, all ranges	
±90 ppm of step (±6 LSB)	2.5 µs convert interval
±30 ppm of step (±2 LSB)	3.5 µs convert interval
±15 ppm of step (±1 LSB)	5.5 µs convert interval

Typical Performance Graphs

Figure 3. Settling Error versus Time for Different Source Impedances

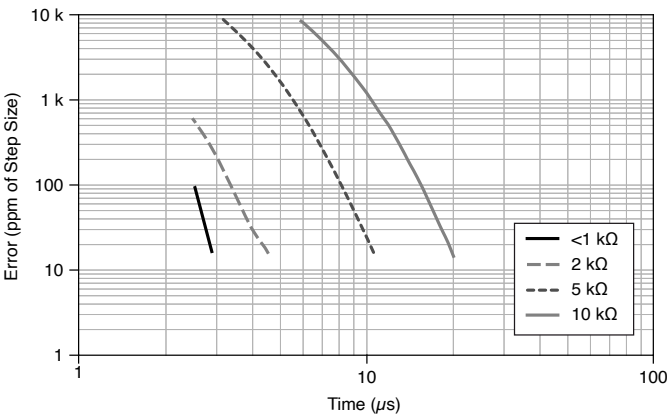

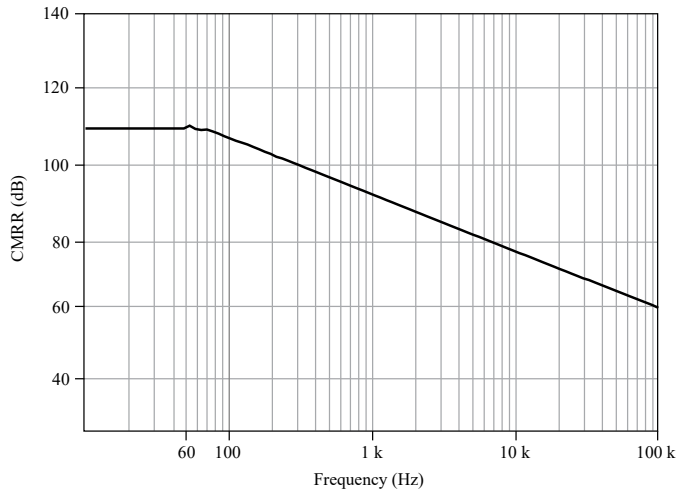**Figure 2. AI CMRR**

## AI Absolute Accuracy (Warranted)



**Note** Accuracies listed are valid for up to one year from the device external calibration.



**Note** The input/output channels of this device are not protected for electromagnetic interference due to functional reasons. As a result, this device may experience reduced measurement accuracy or other temporary performance degradation when connected cables are routed in an environment with radiated or conducted radio frequency electromagnetic interference. To ensure that this device functions within specifications in its operational electromagnetic environment and to limit radiated emissions, care should be taken in the selection, design, and installation of measurement probes and cables.

**Table 1. AI Absolute Accuracy**

Nominal Range Positive Full Scale	Nominal Range Negative Full Scale	Residual Gain Error (ppm of Reading)	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	Random Noise, $\sigma$ ( $\mu\text{V}_{\text{rms}}$ )	Absolute Accuracy at Full Scale ( $\mu\text{V}$ )	Sensitivity ( $\mu\text{V}$ )
10	-10	75	20	34	295	2,710	118.0
5	-5	85	20	36	149	1,420	59.6
1	-1	95	25	49	32	310	12.8

Nominal Range Positive Full Scale	Nominal Range Negative Full Scale	Residual Gain Error (ppm of Reading)	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	Random Noise, $\sigma$ ( $\mu\text{Vrms}$ )	Absolute Accuracy at Full Scale ( $\mu\text{V}$ )	Sensitivity ( $\mu\text{V}$ )
0.2	-0.2	135	40	116	13	89	5.2



**Note** Sensitivity is the smallest voltage change that can be detected. It is a function of noise.

Gain tempco	7.3 ppm/°C
Reference tempco	5 ppm/°C
INL error	76 ppm of range

#### AI Absolute Accuracy Equation

***AbsoluteAccuracy = Reading · (GainError) + Range · (OffsetError) + NoiseUncertainty***

- ***GainError = ResidualAIGainError + GainTempco · (TempChangeFromLastInternalCal) + ReferenceTempco · (TempChangeFromLastExternalCal)***
- ***OffsetError = ResidualAIOffsetError + OffsetTempco · (TempChangeFromLastInternalCal) + INLError***
- ***NoiseUncertainty =***  

$$\frac{\text{Random Noise} \cdot 3}{\sqrt{100}}$$

for a coverage factor of 3  $\sigma$  and averaging 100 points.



## AI Absolute Accuracy Example

Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:

- TempChangeFromLastExternalCal = 10 °C
- TempChangeFromLastInternalCal = 1 °C
- number\_of\_readings = 100
- CoverageFactor = 3  $\sigma$

For example, on the 10 V range, the absolute accuracy at full scale is as follows:

- GainError = 75 ppm + 7.3 ppm · 1 + 5 ppm · 10 = 132 ppm
- OffsetError = 20 ppm + 34 ppm · 1 + 76 ppm = 130 ppm
- NoiseUncertainty =  

$$\frac{295 \mu\text{V} \cdot 3}{\sqrt{100}}$$
 = 88.5  $\mu\text{V}$
- AbsoluteAccuracy = 10 V · (GainError) + 10 V · (OffsetError) + NoiseUncertainty = 2,710  $\mu\text{V}$

## Analog Output

Number of channels	2
DAC resolution	16 bits
DNL	±1 LSB
Monotonicity	16 bit guaranteed
<b>Maximum update rate</b>	
1 channel	250 kS/s

2 channels	250 kS/s per channel
Timing accuracy	50 ppm of sample rate
Timing resolution	50 ns
Output range	$\pm 10$ V
Output coupling	DC
Output impedance	$0.2\ \Omega$
Output current drive	$\pm 2$ mA
Overdrive protection	$\pm 30$ V
Overdrive current	2.4 mA
Power-on state	$\pm 20$ mV
Power-on glitch	$\pm 1$ V for 200 ms
Output FIFO size	8,191 samples shared among channels used

Data transfers	USB Signal Stream, programmed I/O
AO waveform modes	Non-periodic waveform, periodic waveform regeneration mode from onboard FIFO, periodic waveform regeneration from host buffer including dynamic update
Settling time, full-scale step, 15 ppm (1 LSB)	32 $\mu$ s
Slew rate	5 V/ $\mu$ s
<b>Glitch energy</b>	
Magnitude	100 mV
Duration	2.6 $\mu$ s

## AO Absolute Accuracy (Warranted)

Absolute accuracy at full-scale numbers is valid immediately following internal calibration and assumes the device is operating within 10 °C of the last external calibration.



**Note** Accuracies listed are valid for up to one year from the device external calibration.



**Note** The input/output channels of this device are not protected for electromagnetic interference due to functional reasons. As a result, this device may experience reduced measurement accuracy or other temporary performance degradation when connected cables are routed in an

environment with radiated or conducted radio frequency electromagnetic interference. To ensure that this device functions within specifications in its operational electromagnetic environment and to limit radiated emissions, care should be taken in the selection, design, and installation of measurement probes and cables.

Table 2. AO Absolute Accuracy

Nominal Range Positive Full Scale (V)	Nominal Range Negative Full Scale (V)	Residual Gain Error (ppm of Reading)	Gain Tempco (ppm/°C)	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	Absolute Accuracy at Full Scale (μV)
10	-10	90	11	60	12	3,512

Reference tempco	5 ppm/°C
INL error	128 ppm of range

AO Absolute Accuracy Equation

$$\text{AbsoluteAccuracy} = \text{OutputValue} \cdot (\text{GainError}) + \text{Range} \cdot (\text{OffsetError})$$

- $\text{GainError} = \text{ResidualGainError} + \text{GainTempco} \cdot (\text{TempChangeFromLastInternalCal}) + \text{ReferenceTempco} \cdot (\text{TempChangeFromLastExternalCal})$
- $\text{OffsetError} = \text{ResidualOffsetError} + \text{AOOffsetTempco} \cdot (\text{TempChangeFromLastInternalCal}) + \text{INLError}$

## Digital I/O and PFI

### Static Digital I/O Characteristics

Digital input or output

BNC/Mass Termination	24 total, 8 (P0.<0..7>), 16 (PFI <0..7>/P1.<0..7>,PFI <8..15>/P2.<0..7>)
Screw Terminal	32 total, 16 (P0.<0..15>), 16 (PFI <0..7>/P1.<0..7>,PFI <8..15>/P2.<0..7>)
Ground reference	D GND
Pull-down resistor	50 k $\Omega$ typical, 20 k $\Omega$ minimum
Input voltage protection	$\pm 20$ V on up to 8 pins <sup>[1]</sup>

## PFI Functionality

Functionality	Static digital input, static digital output, timing input, timing output
Timing output sources	Many AI, AO, counter timing signals
Debounce filter settings	125 ns, 6.425 $\mu$ s, 2.56 ms, disable; high and low transitions; selectable per input

## Maximum Operating Conditions

I <sub>OL</sub> output low current	16 mA maximum
I <sub>OH</sub> output high current	-16 mA maximum

## Digital Input Characteristics

Level	Minimum	Maximum
$V_{IL}$ input low voltage	0 V	0.8 V
$V_{IH}$ input high voltage	2.2 V	5.25 V
$I_{IL}$ input low current ( $V_{in} = 0$ V)	-	-10 $\mu$ A
$I_{IH}$ input high current ( $V_{in} = 5$ V)	-	250 $\mu$ A
Positive-going threshold ( $V_{T+}$ )	-	2.2 V
Negative-going threshold ( $V_{T-}$ )	0.8 V	-
Delta VT hysteresis ( $V_{T+} - V_{T-}$ )	0.2 V	-

## Digital Output Characteristics

Figure 3. PFI <0..15>/P0.<0..15>:  $I_{OH}$  versus  $V_{OH}$


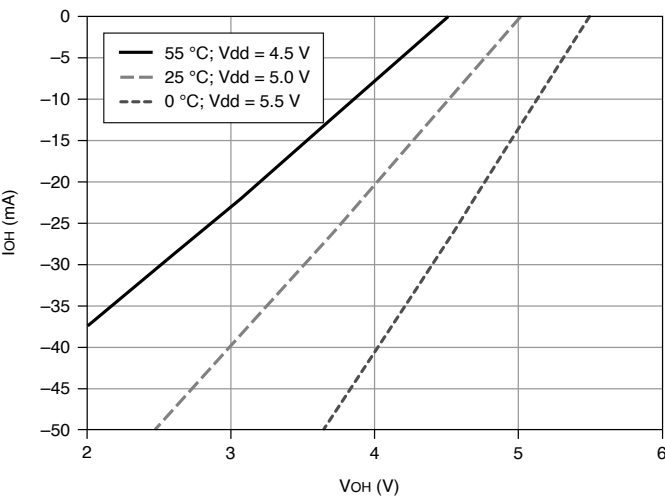


Figure 4. PFI <0..15>/P0.<0..15>:  $I_{OL}$  versus  $V_{OL}$

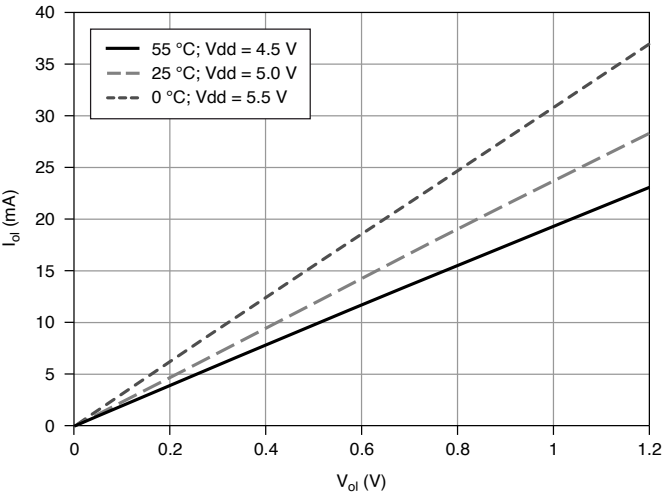

## General-Purpose Counters/Timers

Number of counter/timers	2
Resolution	32 bits
Counter measurements	Edge counting, pulse, semi-period, period, two-edge separation
Position measurements	X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding
Output applications	Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling
Internal base clocks	80 MHz, 20 MHz, 0.1 MHz
External base clock frequency	0 MHz to 20 MHz

Base clock accuracy	50 ppm
Inputs	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down
Routing options for inputs	PFI <0..15>, many internal signals
FIFO	1,023 samples
Data transfers	USB Signal Stream, programmed I/O

## Frequency Generator

Number of channels	1
Base clocks	10 MHz, 100 kHz
Divisors	1 to 16
Base clock accuracy	50 ppm

Output can be available on any output PFI terminal.

## External Digital Triggers

Source	PFI <0..15>
--------	-------------



Polarity	Software-selectable for most signals
Analog input function	Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Convert Clock, Sample Clock Timebase
Analog output function	Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Counter/timer function	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down

## Bus Interface

USB	USB 2.0 Hi-Speed or full-speed <sup>[2]</sup>
USB Signal Stream	4, can be used for analog input, analog output, counter/timer 0, counter/timer 1

## Current Limits

<b>+5 V terminal as output<sup>[3]</sup></b>	
Voltage	4.6 V to 5.2 V
Current (internally limited)	50 mA maximum, shared with digital outputs
<b>+5 V terminal as input<sup>[3]</sup></b>	

Voltage	4.75 V to 5.35 V
Current	350 mA maximum, self-resetting fuse



**Caution** Do ***not*** exceed 16 mA per DIO pin.

Protection	$\pm 10$ V
------------	------------

## Power Requirements

Input voltage on USB port	4.5 V to 5.25 V in configured state
Maximum inrush current	500 mA
No load typical current	320 mA at 4.5 V
<b>Maximum load</b>	
Typical current	400 mA at 4.5 V
Suspend current	260 $\mu$ A typical

## Physical Characteristics

Dimensions (includes connectors)
----------------------------------

BNC	23.5 cm × 11.2 cm × 6.4 cm (9.25 in. × 4.40 in. × 2.50 in.)
Mass Termination	19.3 cm × 9.4 cm × 3.1 cm (7.61 in. × 3.68 in. × 1.20 in.)
Screw Terminal	16.9 cm × 9.4 cm × 3.1 cm (6.65 in. × 3.70 in. × 1.20 in.)
<b>Weight</b>	
BNC	950 g (33.5 oz)
Mass Termination	231 g (8.1 oz)
Screw Terminal	206 g (7.2 oz)
<b>I/O connectors</b>	
BNC	19 BNCs and 26 screw terminals
Mass Termination	1 68-pin SCSI
Screw Terminal	4 16-position combicon
Screw terminal wiring	16 AWG to 28 AWG
Torque for screw terminals	0.22 N · m to 0.25 N · m (2.0 lb · in. to 2.2 lb · in.)
USB connector	Series B receptacle

To clean the device, wipe with a dry towel.

## Calibration

Recommended warm-up time	15 minutes
Calibration interval	1 year

## Environmental

Operating temperature	0 °C to 45 °C
Storage temperature	-20 °C to 70 °C
Humidity	10% RH to 90% RH, noncondensing
Maximum altitude	2,000 m
Pollution Degree	2

Indoor use only.

## Safety Voltages

Connect only voltages that are below these limits.

Channel-to-earth ground<sup>[4]</sup>

Continuous	$\leq 60$ VDC Measurement Category I	
Withstand	$\leq 1,000$ Vrms, verified by a 5 s dielectric withstand test	
Analog channel-to-AI GND or AO GND (in the following figure, $ V_a - V_c $ )		$\leq 11$ V, Measurement Category I
Digital channel-to-D GND (in the following figure, $ V_b - V_c $ )		$\leq 5.25$ V, Measurement Category I

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.




**Caution** This device is rated for Measurement Category I and the voltage across the isolation barrier is limited to no greater than 30 Vrms/60 VDC/42.4 V<sub>pk</sub> continuous. Do not use for measurements within Measurement Categories CAT II, CAT III, or CAT IV.



**Note** Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

The following figure illustrates the safety voltages specifications.

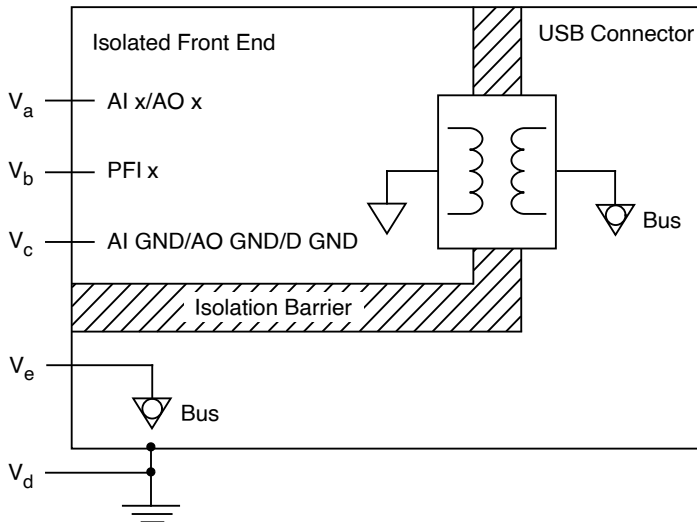**Figure 5. USB-6216 Safety Voltages**

## Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

## Electromagnetic Compatibility

### CE Compliance $\subset \text{€}$

- 2011/65/EU; Restriction of Hazardous Substances (RoHS)

## Product Certifications and Declarations


Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](https://ni.com/product-certifications), search by model number, and click the appropriate link.

## Environmental Management


NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

### EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

### 电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)