
NI-9411

Specifications

2025-03-10



Contents

NI-9411 Specifications	3
------------------------------	---

NI-9411 Specifications

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

Related information:

- [Software Support for CompactRIO, CompactDAQ, Single-Board RIO, R Series, and EtherCAT](#)

Conditions

Specifications are valid for the range -40 °C to 70 °C unless otherwise noted. All voltages are relative to COM unless otherwise noted.

NI 9411 Pinout

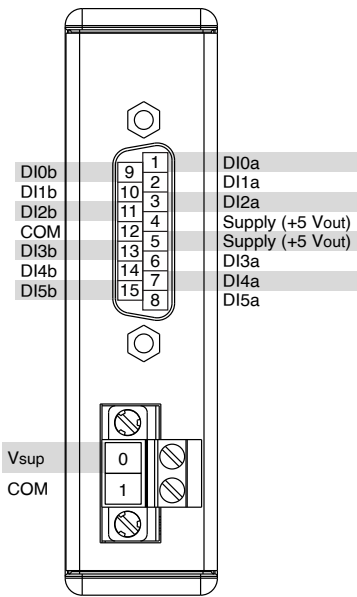


Table 1. DSUB Connector Signal Descriptions

Signal	Description
COM	Common reference connection to isolated ground
DIa and DIb	Digital input signal connections
Supply (+5 V _{out})	5 V power output connection for external devices

Table 2. Screw-Terminal Connector Signal Descriptions

Signal	Description
COM	Common reference connection to isolated ground
V _{sup}	Voltage supply connection

Input Characteristics

Number of channels	6 digital input channels
--------------------	--------------------------

Input type	Differential or single-ended	
Digital logic levels		
Differential (DIa and DIb)		
Input high range	300 mV to 24 V	
Input low range	-300 mV to -24 V	
Common-mode voltage	-7 V to 12 V	
Single-ended		
Input high range	2 V to 24 V	
Input low range	0 V to 0.8 V	
Input current		
At 5 V	±1 mA per channel	
At 24 V	±4 mA per channel	
Input impedance	8.4 kΩ	
I/O protection		
Input voltage (channel-to-COM)	30 V maximum	

Input current	±4 mA, internally limited
Input delay time	500 ns maximum
MTBF	800,319 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method

Power Requirements

Power consumption from chassis	
Active mode	340 mW maximum
Sleep mode	1.1 mW maximum
Thermal dissipation (at 70 °C)	
Active mode	1.4 W maximum
Sleep mode	1.1 W maximum

Physical Characteristics

Dimensions	Visit ni.com/dimensions and search by module number.
Screw-terminal wiring	
Gauge	0.05 mm ² to 1.5 mm ² (30 AWG to 14 AWG) copper conductor wire

Wire strip length	6 mm (0.24 in.) of insulation stripped from the end		
Temperature rating	90 °C minimum		
Torque for screw terminals	0.22 N · m to 0.25 N · M (1.95 lb · in. to 2.21 lb · in.)		
Wires per screw terminal	One wire per screw terminal; two wires per screw terminal using a 2-wire ferrule		
Ferrules	0.25 mm ² to 1.5 mm ²		
Connector securement			
Securement type		Screw flanges provided	
Torque for screw flanges		0.2 N · m (1.80 lb · in.)	
Weight	136 g (4.8 oz)		

Safety Voltages

Connect only voltages that are within the following limits.

Channel-to-COM or Vsup-to-COM	30 V maximum, Measurement Category I
Isolation	

Channel-to-channel		None
Channel-to-earth ground		
Continuous	30 V RMS, 42.4 Vpk, 60 V DC	
Withstand	400 V RMS, verified by a 5 s dielectric withstand test	

Measurement Category I



Warning Do not connect the product to signals or use for measurements within Measurement Categories II, III, or IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category II, III, or IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation. The product can only withstand transients up to the transient overvoltage rating without breakdown or damage to the insulation. An analysis of the working voltages, loop impedances, temporary overvoltages, and transient overvoltages in the system must be conducted prior to making measurements.



Mise en garde Ne pas connecter le produit à des signaux dans les catégories de mesure II, III ou IV et ne pas l'utiliser pour des mesures dans ces catégories, ou des mesures sur secteur ou sur des circuits dérivés de surtensions de catégorie II, III ou IV pouvant présenter des surtensions transitoires supérieures à ce que le produit peut supporter. Le produit ne doit pas être raccordé à des circuits ayant une tension maximale supérieure à la tension de fonctionnement continu, par rapport à la terre ou à d'autres voies, sous peine d'endommager et de compromettre l'isolation. Le produit peut tomber en panne et son isolation risque d'être endommagée si les tensions transitoires dépassent la surtension transitoire nominale. Une analyse des tensions de fonctionnement, des impédances de boucle, des surtensions

temporaires et des surtensions transitoires dans le système doit être effectuée avant de procéder à des mesures.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as **MAINS** voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Environmental Characteristics

Temperature		
Operating		-40 °C to 70 °C
Storage		-40 °C to 85 °C
Humidity		
Operating	10% RH to 90% RH, noncondensing	
Storage	5% RH to 95% RH, noncondensing	
Ingress protection		IP40

Pollution Degree		2
Maximum altitude		2,000 m
Shock and Vibration		
Operating vibration		
Random	5 g RMS, 10 Hz to 500 Hz	
Sinusoidal	5 g, 10 Hz to 500 Hz	
Operating shock	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations	

To meet these shock and vibration specifications, you must panel mount the system.