
NI-9402

Specifications

2025-03-10



Contents

NI-9402 Specifications	3
------------------------------	---

NI-9402 Specifications

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

Related information:

- [Software Support for CompactRIO, CompactDAQ, Single-Board RIO, R Series, and EtherCAT](#)

Conditions

Specifications are valid for the range -40 °C to 70 °C unless otherwise noted. All voltages are relative to GND unless otherwise noted.

NI-9402 Pinout

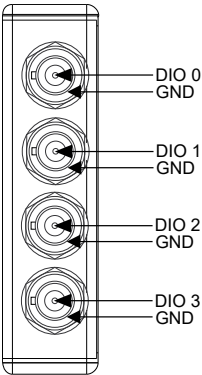


Table 1. Signal Descriptions

Signal	Description
DIO	Digital input/output signal connection
GND	Ground connection

Input/Output Characteristics

Number of channels	4 DIO channels
Default power-on line direction	Input
Input/output type	LVTTL, single-ended
Digital logic levels	
Maximum input voltage	5.25 V
Input high, V_{IH}	2 V minimum
Input low, V_{IL}	0.8 V maximum

Output high, V_{OH} (3.4 V maximum)	
Sourcing 100 μ A	3.0 V minimum
Sourcing 2 mA	2.8 V minimum
Output low, V_{OL}	
Sinking 100 μ A	0.1 V maximum
Sinking 2 mA	0.3 V maximum
Maximum I/O switching frequency	
4 channels	16 MHz
2 channels	20 MHz
I/O propagation delay ^{1, 2[2]}	55 ns maximum, 18 ns typical
I/O pulse width distortion ^[2]	25 ns maximum
Input low current, I_{IL} ($V_{IN} = 0$ V)	-55 μ A maximum

1. Propagation delay is the maximum amount of time it takes for an input or output signal to propagate between the backplane and the I/O connector, and does not include any additional delay introduced by the cable.
2. Measured at the I/O connector of a load with requirements similar to the NI-9402 and driven through a 2 m coaxial cable.

Input high current, I_{IH} ($V_{IN} = 4.5\text{ V}$)	150 μA maximum
Input impedance	
Input capacitance	50 pF maximum
Input resistance	49 k Ω minimum
Input rise/fall rate	10 ns/V maximum
Input protection	$\pm 30\text{ V}$ maximum on one channel at a time
MTBF	1,482,777 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method

Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-earth ground	$\pm 30\text{ V}$ maximum
Isolation	
Channel-to-channel	None
Channel-to-earth ground	None

Environmental Characteristics

Temperature		
Operating		-40 °C to 70 °C
Storage		-40 °C to 85 °C
Humidity		
Operating	10% RH to 90% RH, noncondensing	
Storage	5% RH to 95% RH, noncondensing	
Ingress protection		IP40
Pollution Degree		2
Maximum altitude		2,000 m
Shock and Vibration		
Operating vibration		
Random		5 g RMS, 10 Hz to 500 Hz
Sinusoidal		5 g, 10 Hz to 500 Hz
Operating shock	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations	

To meet these shock and vibration specifications, you must panel mount the system.

Power Requirements

Power consumption from chassis	
Active mode	550 mW maximum
Sleep mode	1 mW maximum
Thermal dissipation (at 70 °C)	
Active mode	550 mW maximum
Sleep mode	1 mW maximum

Physical Characteristics

If you need to clean the module, wipe it with a dry towel.

Cable	50 Ω BNC
Cable length	2 m maximum
Weight	199 g (6.9 oz)