

---

# NI-9425

# Specifications

---

2025-03-10



# Contents

NI-9425 Specifications .....	3
------------------------------	---

# NI-9425 Specifications

## Introduction

In this document, the NI-9425 with spring terminal and NI-9425 with DSUB are referred to inclusively as the NI-9425. The information in this document applies to all versions of the NI-9425 unless otherwise specified.

### Related information:

- [Software Support for CompactRIO, CompactDAQ, Single-Board RIO, R Series, and EtherCAT](#)

## Definitions

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

**Characteristics** describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

## Conditions

Specifications are valid for the range -40 °C to 70 °C unless otherwise noted.

## NI-9425 Pinout

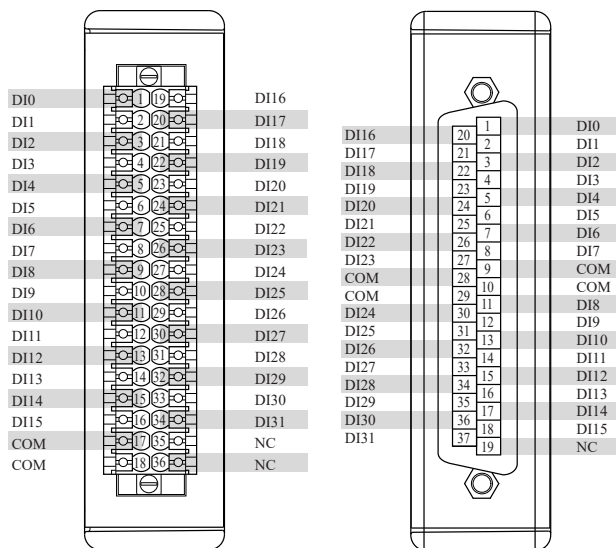


Table 1. Signal Descriptions

Signal	Description
COM	Common reference connection to isolated ground
DI	Digital input signal connection
NC	No connection

## Input Characteristics

Number of channels	32 digital input channels
Input type	Sinking
Digital logic levels	
OFF state	
Input voltage	$\leq 5\text{ V}$

Input current		≤150 μA
ON state		
Input voltage		≥10 V
Input current		≥330 μA
Hysteresis		
Input voltage		2 V minimum
Input current		60 μA minimum
Input impedance	30 kΩ ± 5%	
I/O protection		
Input voltage		
8 channels		60 V DC maximum
32 channels		30 V DC maximum
Reverse-biased voltage		
8 channels		-60 V DC maximum
32 channels		-30 V DC maximum

Hold time <sup>1</sup>	0 $\mu$ s minimum
Setup time <sup>2</sup>	1 $\mu$ s minimum
<b>Update/transfer time<sup>3</sup></b>	
cRIO-9151 R Series Expansion chassis	8 $\mu$ s maximum
All other chassis	7 $\mu$ s maximum
MTBF	1,256,699 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method

## Power Requirements

<b>Power consumption from chassis</b>	
Active mode	410 mW maximum
Sleep mode	0.5 mW maximum
<b>Thermal dissipation (at 70 °C)</b>	
Active mode	1.45 W maximum

1. **Hold time** is the amount of time input signals must be stable after initiating a read from the module.
2. **Setup time** is the amount of time input signals must be stable before reading from the module.
3. The update/transfer time is valid when the module is used in a CompactRIO system. When used in other systems, driver software and system latencies impact this time.

Sleep mode	1 W maximum
------------	-------------

## Physical Characteristics

Spring-terminal wiring	
Gauge	0.14 mm <sup>2</sup> to 1.5 mm <sup>2</sup> (26 AWG to 16 AWG) copper conductor wire
Wire strip length	10 mm (0.394 in.) of insulation stripped from the end
Temperature rating	90 °C, minimum
Wires per spring terminal	One wire per spring terminal; two wires per spring terminal using a 2-wire ferrule
Ferrules	0.14 mm <sup>2</sup> to 1.5 mm <sup>2</sup>
Connector securement	
Securement type	Screw flanges provided
Torque for screw flanges	0.2 N · m (1.80 lb · in.)
Weight	
NI-9425 with spring terminal	163 g (5.7 oz)
NI-9425 with DSUB	147 g (5.2 oz)

## NI-9425 with Spring Terminal Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-COM	60 V DC
<b>Isolation</b>	
Channel-to-channel	None
<b>Channel-to-earth ground</b>	
Continuous	250 V RMS, Measurement Category II
Withstand Up to 5,000 m	3,000 V RMS, verified by a 5 s dielectric withstand test

## NI-9425 with DSUB Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-COM	60 V DC
<b>Isolation</b>	
Channel-to-channel	None
<b>Channel-to-earth ground</b>	
Continuous	60 V DC, Measurement Category I
Withstand up to 2,000 m	1,000 V RMS verified by a 5 s dielectric withstand test



Withstand Up to 5,000 m	500 V RMS , verified by a 5 s dielectric withstand test
-------------------------	---

## Environmental Characteristics

Temperature		
Operating		-40 °C to 70 °C
Storage		-40 °C to 85 °C
Humidity		
Operating	10% RH to 90% RH, noncondensing	
Storage	5% RH to 95% RH, noncondensing	
Ingress protection		IP40
Pollution Degree		2
Maximum altitude		2,000 m
Shock and Vibration		
Operating vibration		
Random	5 g RMS, 10 Hz to 500 Hz	
Sinusoidal	5 g, 10 Hz to 500 Hz	

Operating shock	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations
-----------------	--

To meet these shock and vibration specifications, you must panel mount the system.

## Calibration

You can obtain the calibration certificate and information about calibration services for the NI-9425 at [ni.com/calibration](https://ni.com/calibration).

Calibration interval	1 year
----------------------	--------